


# ROLLER PUMPS

## HYPRO



4001 (3/4") and 4101 (3/4") Series

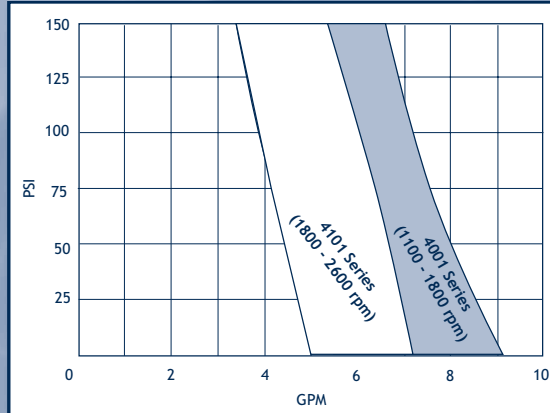

## UP TO 9 GPM, 150 PSI

- Temperatures to 140° F
- Cast iron, Ni-Resist or "Silver Series" alloy housing
- Rollers available in Poly, Teflon®, Buna or "Super" Chem resistant material
- Shaft seal standard is Viton®; Buna or leather available as options
- Pedestal mounted for direct or pulley drive (PTO drive also available)
- 3/4" female pipe thread ports

CONTENTS

INDEX

NEXT


BACK

HOME

## HYPRO



6500 (3/4") and 7560 (3/4") Series

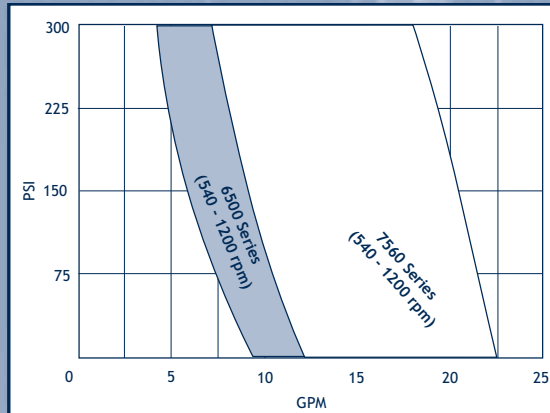


## UP TO 22.5 GPM, 300 PSI

- Temperatures to 140° F
- Cast iron, Ni-Resist or "Silver Series" alloy housing
- Rollers available in Poly, Teflon®, Buna or "Super" Chem resistant material
- Shaft seal standard is Viton®; Buna or leather available as options
- Pedestal mounted for direct or pulley drive (PTO drive also available)
- 3/4" female pipe thread ports

## HYPRO



7700 (3/4") and 1700 (1") Series

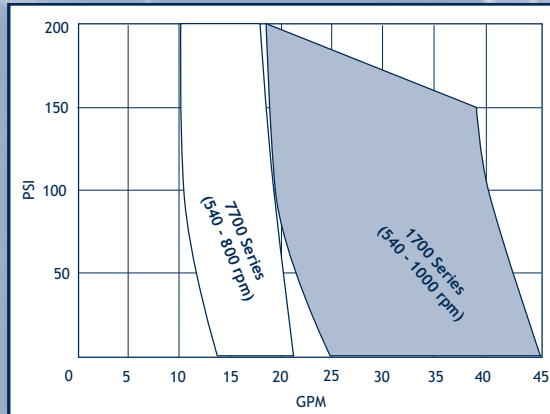


## UP TO 45 GPM, 200 PSI

- Temperatures to 140° F
- Cast iron, Ni-Resist or "Silver Series" alloy housing
- Rollers available in Poly, Teflon®, Buna or "Super" Chem resistant material
- Shaft seal standard is Viton®; Buna or leather available as options
- Pedestal mounted for direct or pulley drive (PTO drive also available)
- 3/4" (7700) or 1" (1700) female pipe thread ports

## HYPRO



1500 (1 1/2") and 1200 (1 1/2") Series

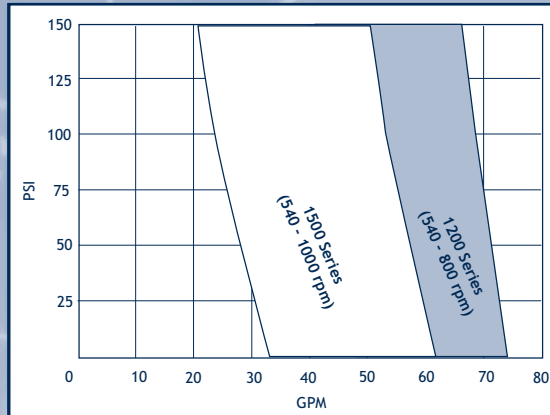

## UP TO 74 GPM, 150 PSI

- Temperatures to 140° F
- Cast iron, Ni-Resist or "Silver Series" alloy housing
- Rollers available in Poly, "Super" or Teflon® (in 1500 model only)
- Shaft seal standard is Buna or Viton® optional
- Pedestal mounted for direct or pulley drive (PTO drive also available)
- 1 1/2" female pipe thread ports