


# TRASH AND DREDGE CENTRIFUGALS

## AMT



2" - 4" Sewage and Trash Pumps

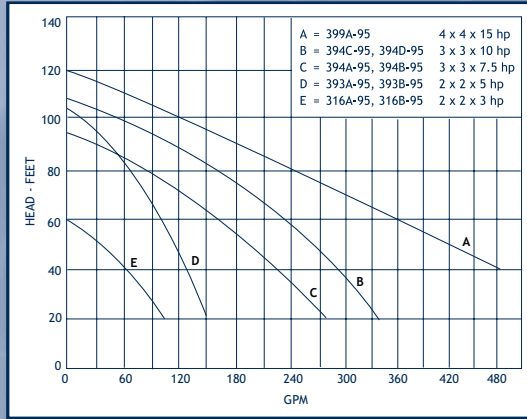

## UP TO 480 GPM, 120' TDH

- Temperatures to 180° F
- Self-priming to 20 ft.
- Semi-open stainless steel impeller
- Solids handling
  - 2" Ports - 1" diameter
  - 3" Ports - 1 1/2" diameter
  - 4" Ports - 2" diameter
- Construction: cast iron with front cleanout (3" and 4" sizes)
- Mounting configurations are either close coupled electric or pedestal

CONTENTS


INDEX

NEXT


BACK

HOME

## AMT




2", 3" and 4" Trash Pumps

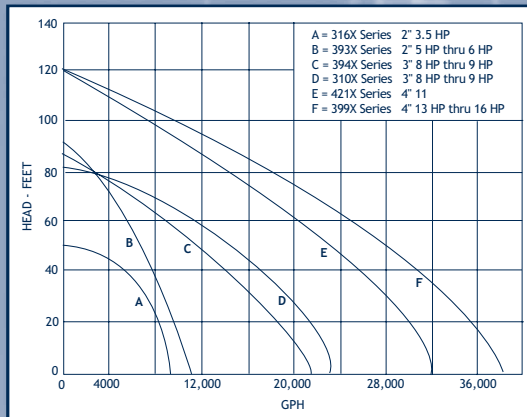


## UP TO 630 GPM, 120' TDH

- Temperatures to 180° F
- Self-priming to 20 ft.
- Semi-open impeller passes up to 2" solids
- Construction: cast iron or cast aluminum
- Hard faced mechanical seal standard
- Engine Options: Honda, Briggs and Stratton, or Vanguard gasoline
- Roll cage or cart mounted configurations

## Gorman-Rupp

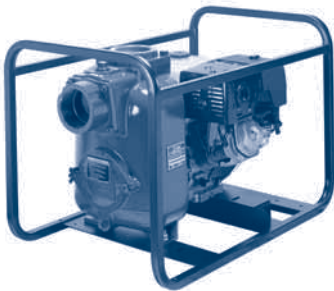


2" - 6" Trash Pumps

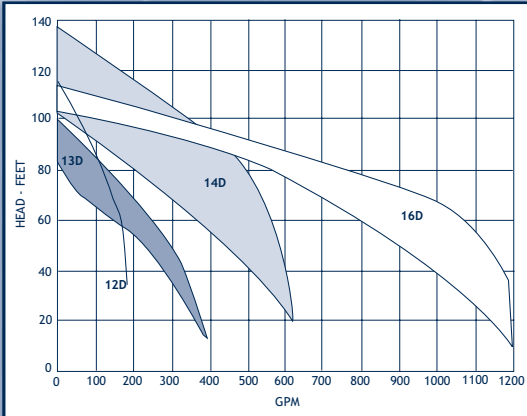


## UP TO 1200 GPM, 138' TDH

- Temperatures to 160° F
- Self-priming to 25 ft.
- Ductile iron impeller with replaceable steel wearplate
- Construction: cast iron or cast aluminum
- Front clean-out design
- Engine Options: Briggs and Stratton, Yanmar, Honda, Kohler, Wisconsin, Hatz and Deutz gas or diesel
- Roll cage or cart mounted configurations

## BURKS



3" - 6" Solids Handling Pumps

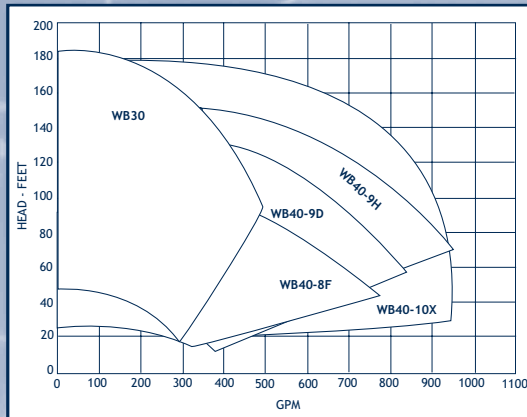

## UP TO 1800 GPM, 180' TDH

- Temperatures to 160° F
- Fully open impeller
- Solids handling
  - 3" Ports - 3/4" diameter
  - 4" Ports - 1" diameter
  - 6" Ports - 1 1/2" diameter
- Construction: Heavy duty cast iron casing with 150 lb. flanged connections (some sizes available in 316SS)
- Mechanical Seal Options: Buna
- Drive Options: pedestal mount for direct or belt drive