


# MAGNETIC DRIVE CENTRIFUGALS

## MARCH



893 Series

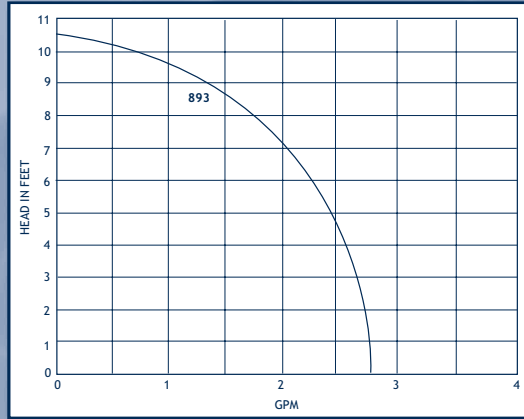

## UP TO 2.7 GPM, 10.5' TDH

- Temperatures to 190°F for open motor, 160°F for submersible
- Ports: 3/8" female NPT inlet, 3/8" or 1/2" OD tubing outlet
- Noryl body and impeller
- 12 or 24 vdc
- Submersible or open air duty
- 893-07, 893-08 893-09 and 893-10 have brushless motors designed for 50,000 hours of life

CONTENTS


INDEX

NEXT


BACK

HOME

## MARCH

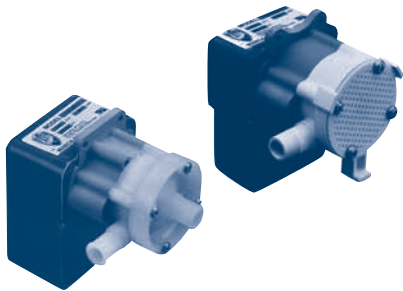


1A/1C/1U-MD Series

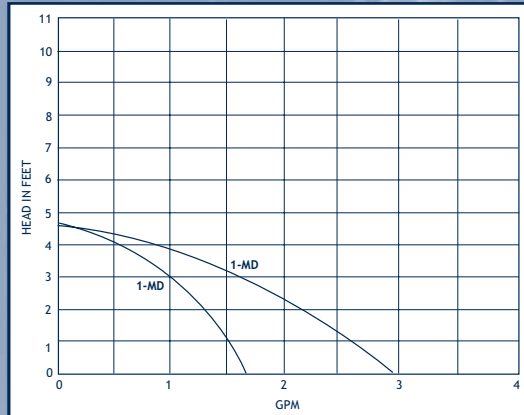


## UP TO 3 GPM, 4.5' TDH

- Temperatures to 190°F for open motor, 160°F for submersible
- Ports: 1/2" OD tube, 3/8" OD tubing, or 1/4" NPT connections
- Construction: Polypropylene body, Nylon impeller
- Buna elastomers
- 115 vac, 50/60 hz motors
- Submersible or open air duty

## MARCH

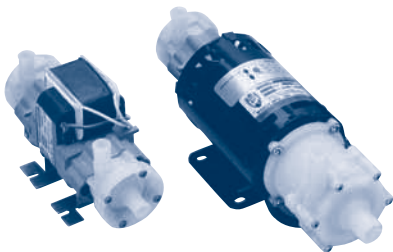


1MD and 2MD Double Headed

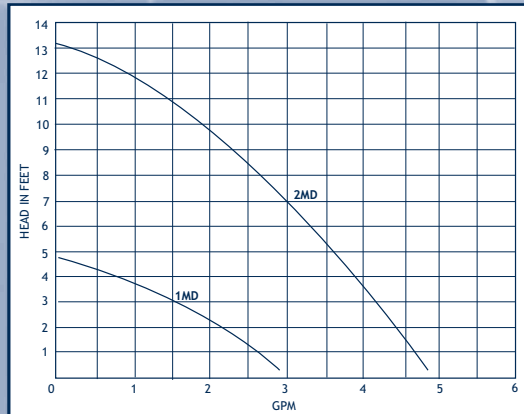


## UP TO 5 GPM (PER HEAD), 13' TDH

- Temperatures to 190°F
- 1/2" tube connectors
- Construction: Polypropylene body, Nylon and Polypropylene impellers
- 1MD has Buna elastomers, 2MD has Viton®
- 115 or 230 vac, 50/60 hz motors

## MARCH



MDX Series

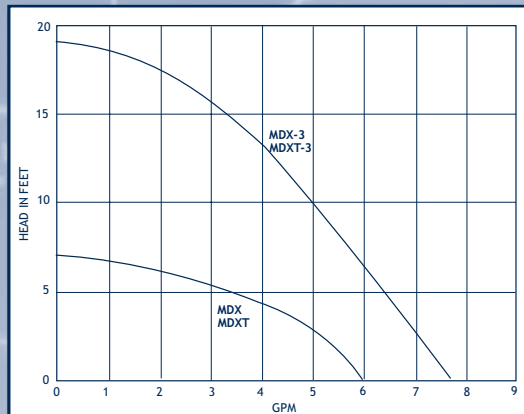

## UP TO 7.6 GPM, 26' TDH

- Temperatures to 200°F
- 1/2" or 5/8" OD tube; 3/8" NPT or 1/2" NPT connections
- Construction: Polypropylene, Ryton® or Kynar
- Buna or Viton® elastomers
- 115 or 230 vac, 50/60 hz motor
- Available with air motor drive