


MAGNETIC DRIVE CENTRIFUGALS

- CONTENTS
- INDEX
- NEXT
- BACK
- HOME


UP TO 8.4 GPM, 17' TDH

- Temperatures to 200° F
- Ports: 1/2" NPT connections
- Construction: Ryton® or Kynar
- Viton® elastomers
- 115 or 230 vac, 50/60 hz motors
- TEFC enclosure standard

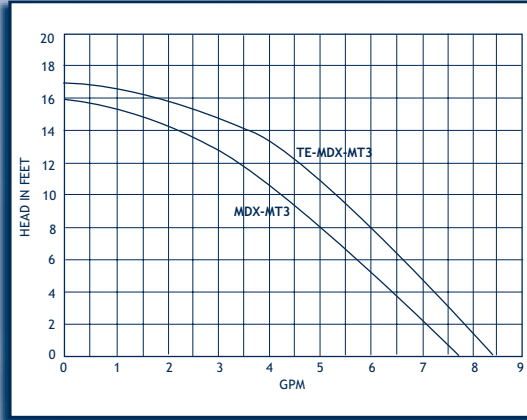


UP TO 8 GPM, 20' TDH

- Temperatures to 190° F
- Construction: Polypropylene
- Viton® elastomers
- 230 vac, single phase 50/60 hz, open motors

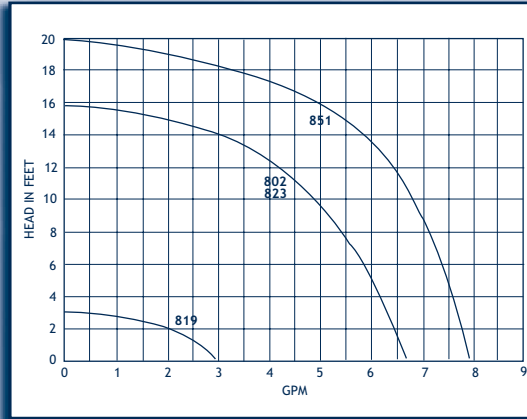

UP TO 5.5 GPM, 13.5' TDH

- Temperatures to 190° F
- Ports:
Inlet: 3/8" FPT \ 3/4" MPT
Outlet: 1/4" FPT
- Construction: Polypropylene
- Viton® or Buna elastomers
- 115 or 230 vac, 50/60 hz motors
- Air motor drive available

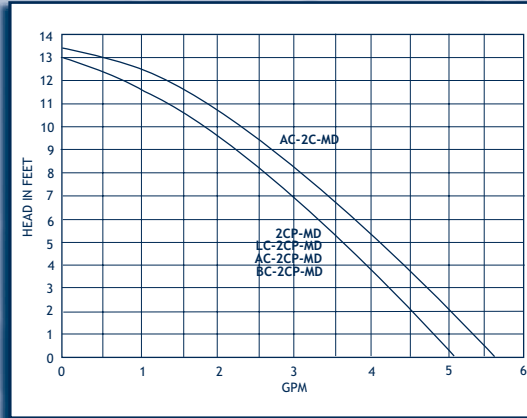

UP TO 5 GPM, 13' TDH

- Temperatures to 130° F
- Construction: Polypropylene
- Ports:
Inlet: 3/8" FPT \ 3/4" MPT
Outlet: 1/4" FPT
- Viton® elastomers
- Submersible (2CP-MD) or submersible open air duty (LC-2CP-MD)
- 115 or 230 vac, 50/60 hz motors

