


VERTICAL CENTRIFUGALS

PRICE



Cast Iron, Bronze or 316SS

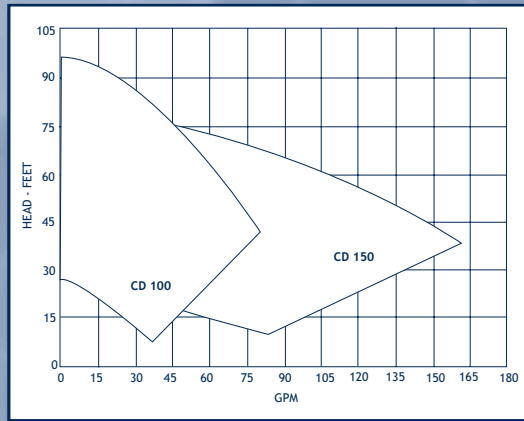

UP TO 160 GPM, 95' TDH

- Temperatures to 300° F
- Column length: 13 to 44 inches
- Construction: cast iron, bronze and stainless
- Threaded suction for using suction pipe extension
- Drive Options: pneumatic, single and three phase, ODP, TEFC, explosion proof and custom configurations

CONTENTS

INDEX

NEXT


BACK

HOME

PRICE




Cast Iron or Cast Iron Bronze Fitted

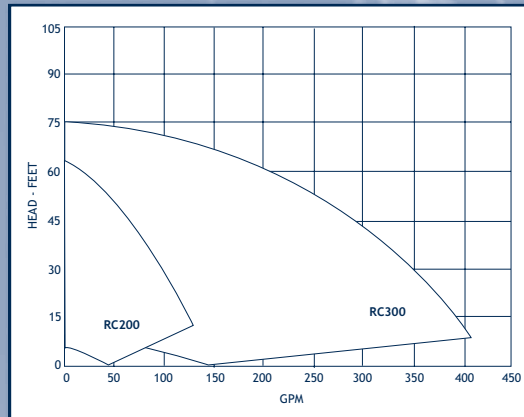


UP TO 400 GPM, 75' TDH

- Temperatures to 300° F
- Column length: 13 to 44 inches
- Construction: cast iron and cast iron bronze fitted
- Optional Viton® fume barrier
- Threaded suction for using suction pipe extension
- Drive Options: pneumatic, single and three phase, ODP, TEFC, explosion proof and custom configurations

KERR




Industrial Sump

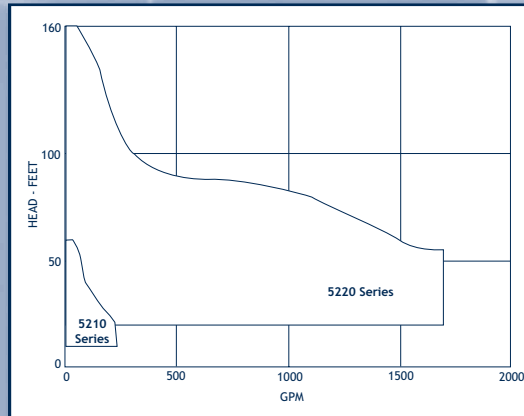


UP TO 1700 GPM, 160' TDH

- Temperatures to 180° F
- Column lengths for sumps up to 25' deep
- Custom sump covers available to meet application
- Construction: cast iron, bronze fitted and 316SS
- Optional float switch: standard duty, watertight or explosion proof
- Typical installations: power plant, hospital and municipal

KERR



Vertical Process

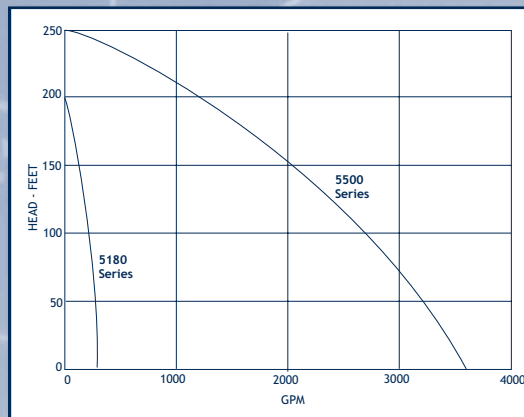

UP TO 3600 GPM, 250' TDH

- Temperatures to 180° F
- Advantages: no bearings or seals below cover
- Custom lengths and covers to meet application
- Construction: cast iron or alloy (5180 is stamped 300 Series SS)
- Typical installations: metal finishing, parts washing and industrial chemical process