


HYDRAULICALLY BALANCED DIAPHRAGM

HYDRA-CELL

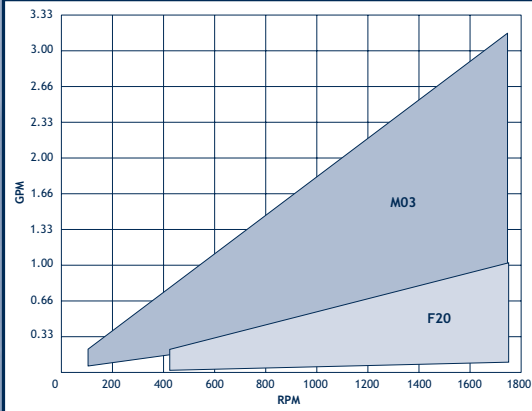

UP TO 13.2 GPM, 1500 PSI

CONTENTS

INDEX


NEXT

BACK

HOME

- Brass, 316SS, Hastelloy® C metallic heads; Polypropylene and Kynar non-metallic heads
- Buna-XS, Viton®-XT, Neoprene, EPDM or Teflon® diaphragm options
- Dry lifts to 5 ft; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- C-Face or bare shaft mounted


HYDRA-CELL

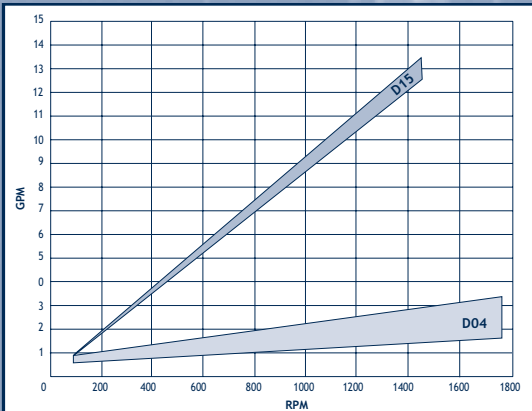

UP TO 15 GPM, 2500 PSI

- Brass or stainless steel pump heads
- Buna-XS or Viton®-XT diaphragm elastomer options
- Dry lifts to 8 ft; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- C-Face or bare shaft mounted
- Smooth, low pulse fluid delivery


HYDRA-CELL

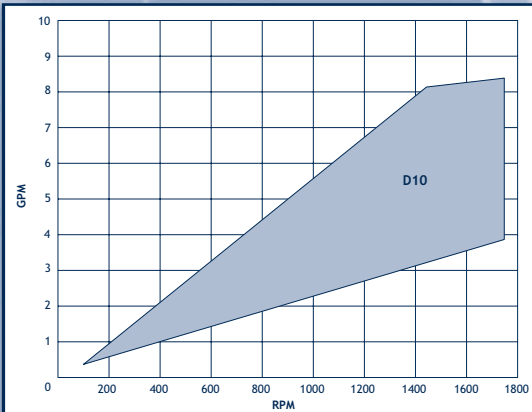

UP TO 8.5 GPM, 1000 PSI Handles Slurries to 300 Psi

- Brass, nickel-plated cast iron, 316SS, Hastelloy® C metallic heads; Polypropylene and Kynar non-metallic heads
- Buna-XS, Viton®-XT, Neoprene, EPDM or Teflon® diaphragm options
- Dry lifts to 7 ft; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- C-Face or bare shaft mounted
- Smooth, low pulse fluid delivery

HYDRA-CELL

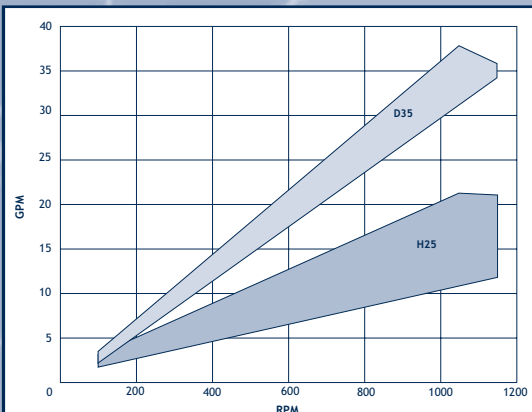

UP TO 37 GPM, 1200 PSI Handles Slurries to 300 Psi

- Brass, nickel-plated cast iron, 316SS, Hastelloy® C metallic heads; Polypropylene and Kynar non-metallic heads
- Buna-XS, Viton®-XT, Neoprene, EPDM or Teflon® diaphragm options
- Dry lifts to 7 ft; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- Slurry-duty versions option for very abrasive liquids
- Smooth, low pulse fluid delivery