



LOW TO HIGH VISCOSITY HANDLING FOR CORROSIVES AND FLAMMABLES

Lutz drum pumps handle a wide range of corrosives, solvents and flammable liquids up to 1,500 cps (100,000 cps with the progressive cavity models - see next page). These pumps are designed specifically for drums, vats, totes, intermediate bulk containers (IBC's), carboys and open vessels up to 10' deep. Custom tube lengths are available to meet unique installations. The B2 series (displayed directly below) is a low flow and lightweight pump to meet the varied requirements of laboratory applications.

Pump Series	Maximum Flow	Materials of Construction
B2 Series	19 GPM	Polypropylene and 316 Stainless Steel
MSL Series	46 GPM	Polypro, PVDF, 316SS, Hastelloy® and Aluminum
MMS Series	46 GPM	Polypro PVDF, 316SS, Hastelloy® and Aluminum
B70V Series	13 GPM	316 Stainless Steel (High Viscosity Series)


- CONTENTS
- INDEX
- NEXT
- BACK
- HOME



19 GPM LABORATORY DRUM PUMP

The Lutz B2 pump series is an indispensable aid wherever liquids with a viscosity similar to that of water have to be filled, transferred, mixed, or metered in small quantities, to or from drums, glass carboys, canisters and other vessels. Even narrow necked containers such as bottles or pistons present no problem. The rate of flow can be reduced or cut off as required. The B2 comes in two lengths (25" and 39"), two materials (Polypropylene and 316 Stainless), and the choice of a 115 vac or a rechargeable DC motor.


Model	Description	Tube Diameter/Length
B2-A PP SL	Polypropylene pump with cordless rechargeable motor	1" / 25"
B2-PP SL - 25"	Polypropylene pump with 120 vac motor - 16 foot cord	1" / 25"
B2-PP SL - 39"	Polypropylene pump with 120 vac motor - 16 foot cord	1 1/4" / 39"
B2-SS SL - 39"	316 Stainless pump with 120 vac motor - 16 foot cord	1 1/8" / 39"

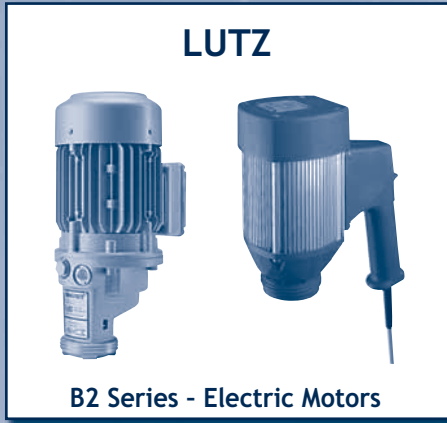

ELECTRIC DRIVE OPTIONS

Lutz offers several different electric motor options for their pump tubes. Most options conform to CE, UL or CSA specifications. Ask one of Depco's application specialists which motor is the right match for your drum pump tube.

Pump Series	Motor Options
MSL/MMS Series	1.07 hp, .85 hp, or .68 hp, 120v or 240v lph, 12 vdc, open TEFC or XP
RE-88	1.07 hp, .85 hp, or .68 hp, 120v or 240v lph, 12 vdc, open TEFC or XP
MS-HC	1.07 hp, .85 hp, or .68 hp, 120v or 240v lph, 12 vdc, open TEFC or XP
MP	1.07 hp, .85 hp, or .68 hp, 120v or 240v lph, 12 vdc, open TEFC or XP
B70	1 hp, 230v or 460v, 3ph, TEFC or XP

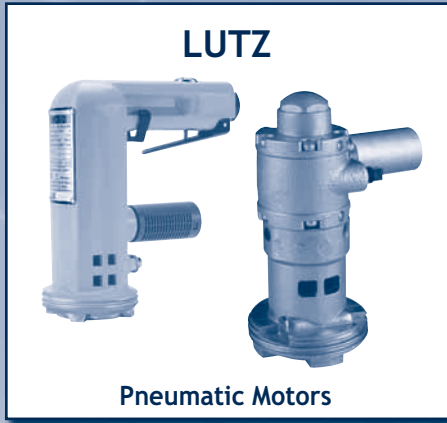

PNEUMATIC DRIVE OPTIONS

Lutz offers four different air-powered motor options for their pump tubes. Air motors may be the best selection for hazardous locations. Ask one of Depco's applications specialists which motor is the right match for your drum pump tube.

Pump Series	Air Motor Options
MSL/MMS Series	.3 hp or .4 hp, 14CFM at 87 psi or 170 At 87 psi. open or XP
RE-88	.3 hp or .4 hp, 14CFM at 87 psi or 170 At 87 psi. open or XP
MS-HC	.3 hp or .4 hp, 14CFM at 87 psi or 170 At 87 psi. open or XP
MP	.3 hp or .4 hp, 14CFM at 87 psi or 170 At 87 psi. open or XP
B70	2.25 hp, 82CFM at 87 psi, TEFC or XP