

3" & 4" FLANGE AND FLEXMOUNT 100-250CFM

| Model Number | CFM | Mount | Volts | Amps | Inlet Port | Outlet Port |
|----------------|-----|--------|---------|------|------------|-------------|
| JA 34744-0000* | 100 | Flange | 115 vac | .7 | 3" | 2 3/4" |
| JA 34754-0000* | 100 | Flex | 115 vac | .7 | 3" | 3" |
| JA 35115-0020 | 105 | Flange | 12 vdc | 4.4 | 3" | 2 3/4" |
| JA 35515-0010 | 105 | Flex | 12 vdc | 4.3 | 3" | 3" |
| JA 34739-0010 | 150 | Flange | 12 vdc | 6.5 | 3" | 2 3/4" |
| JA 36740-0000 | 150 | Flex | 12 vdc | 6.8 | 3" | 3" |
| JA 34739-0020 | 150 | Flange | 24 vdc | 3.3 | 3" | 2 3/4" |
| JA 36740-0010 | 150 | Flex | 24 vdc | 3.3 | 3" | 3" |
| JA 34739-0030 | 150 | Flange | 32 vdc | 2.5 | 3" | 2 3/4" |
| JA 34739-0031 | 140 | Flange | 115 vdc | 1.0 | 3" | 2 3/4" |
| JA 36740-0031 | 140 | Flex | 115 vdc | 1.0 | 3" | 3" |
| JA 35400-0000 | 250 | Flange | 12 vdc | 12.0 | 4" | 3 5/8" |
| JA 35400-0010 | 250 | Flange | 24 vdc | 5.3 | 4" | 3 5/8" |
| JA 35400-0020 | 250 | Flange | 32 vdc | 4.0 | 4" | 3 5/8" |
| JA 35440-0000 | 250 | Flex | 12 vdc | 12.0 | 4" | 4" |
| JA 35440-0010 | 250 | Flex | 24 vdc | 5.3 | 4" | 4" |
| JA 35440-0020 | 250 | Flex | 32 vdc | 4.0 | 4" | 4" |


*The 34744 & 34754 blowers are not ignition protected



CONT. DUTY FLANGE & FLEXMOUNT 200-250CFM

This new line of Jabsco blowers offer extra long-life of a minimum 10,000 hours, making them ideal for general engine room or genset enclosure ventilation. They are also well suited for general ventilation of head or galley areas. The DC models are ignition protected. The AC models (36760-0115 & 36770-0115) are not ignition protected and should not be used where flammable vapors are present.

| Model Number | CFM | Mount | Volts | Amps | Inlet Port | Outlet Port |
|-----------------|-----|--------|---------|------|------------|-------------|
| JA 35760-0092 | 250 | Flange | 12 vdc | 11.0 | 4" | 3 5/8" |
| JA 35770-0092 | 250 | Flex | 12 vdc | 11.0 | 4" | 1" |
| JA 35760-0094 | 250 | Flange | 24 vdc | 6.0 | 4" | 3 5/8" |
| JA 35770-0094 | 250 | Flex | 24 vdc | 6.0 | 4" | 4" |
| JA 34739-0020HD | 150 | Flange | 24 vdc | 2.5 | 3" | 2 3/4" |
| JA 36760-0115 | 250 | Flange | 115 vac | 1.35 | 4" | 3 5/8" |
| JA 36770-0115 | 250 | Flex | 115 vac | 1.35 | 4" | 4" |

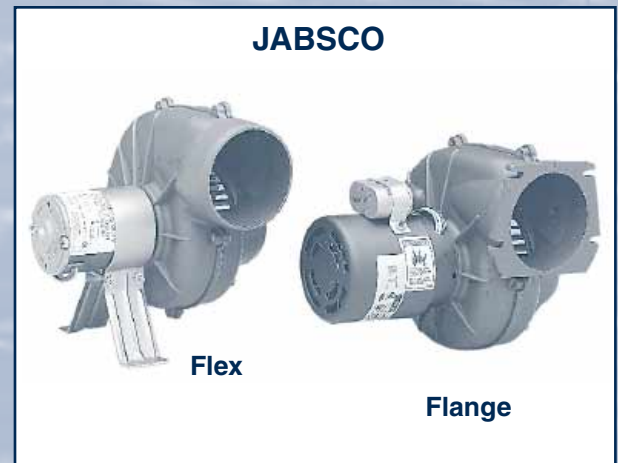

3" & 4" COMPACT "IN-LINE" BLOWERS 135-240CFM

Jabsco in-line blowers provide ventilation for bilges, engine compartments, galley and heads. They are very quiet, produce a high output, are corrosion resistant and will easily install on any flat surface.

| Model Number | CFM | Volts | Amps | Inlet Port | Outlet Port | Dimensions (H x W x L) |
|---------------|-----|--------|------|------------|-------------|------------------------|
| JA 30460-0012 | 140 | 12 vdc | 5 | 3" | 3" | 4" x 5 1/4" x 6 7/8" |
| JA 30490-0012 | 240 | 12 vdc | 5 | 4" | 4" | 4" x 5 1/4" x 6 7/8" |
| JA 30480-0000 | 135 | 12 vdc | 5 | 3" | 3" | 3 3/16" x 5" x 5 1/4" |
| JA 30480-0024 | 135 | 24 vdc | 3 | 3" | 3" | 3 3/16" x 5" x 5 1/4" |
| JA 30500-0000 | 235 | 12 vdc | 7.5 | 4" | 4" | 4 3/16" x 6" x 5 1/4" |
| JA 30500-0024 | 235 | 24 vdc | 5 | 4" | 4" | 4 3/16" x 6" x 5 1/4" |



PARTS FOR ALL JABSCO BLOWERS!

| Key | Part Description |
|-----|--|
| 1 | Bracket Assembly |
| 2 | Motor Kit |
| 3 | Blower Housing |
| 4 | Blower Wheel |
| 5 | Blower Housing |
| 6 | Screw 8 x 5/8 SS Self Tapping Pan Head |

We stock many of the parts used on Jabsco blowers including motors, fan wheels, body parts, etc. To the right of this paragraph is a typical breakdown of a Jabsco blower each item referenced to a parts description. This will assist you in identifying the parts you require when you call us to obtain your required part numbers and pricing.

