


UP TO 140 GPM, 100 TDH

- Temperatures to 300° F
- Semi-open impeller
- Self-priming to 25 ft.
- Construction: Cast Iron, Bronze or Aluminum
- Viton Seal Standard: other materials available
- Drive Options: pedestal mount, hydraulic, electric or manual clutch, gas or diesel engine, single or three phase, ODP, TEFC, explosion proof and custom configurations




MP FLOMAX 5 (1 1/2" & 8 (2"))

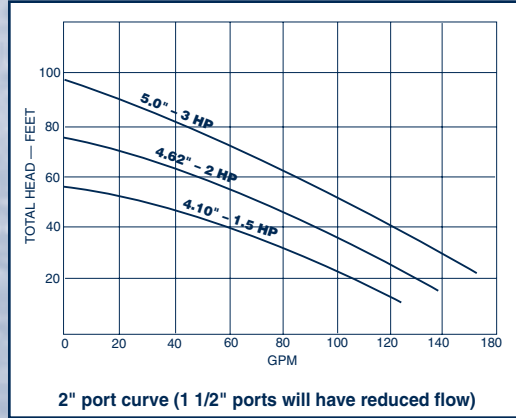

Cast Iron, Bronze & Aluminum

UP TO 300 GPM, 125 TDH

- Temperatures to 300° F
- Semi-open impeller
- Self-priming to 25 ft.
- Construction: Cast Iron, Bronze or Aluminum
- Viton Seal Standard: other materials available
- Drive Options: pedestal mount, hydraulic, electric or manual clutch, gas or diesel engine, single or three phase, ODP, TEFC, explosion proof and custom configurations

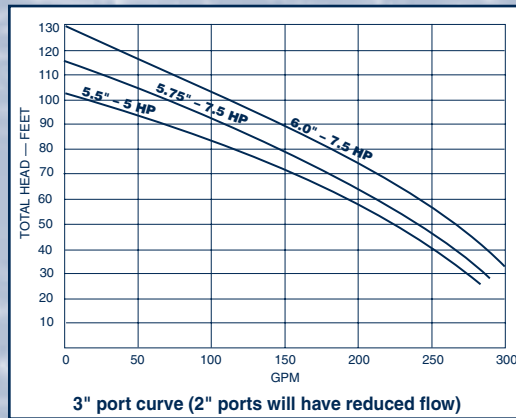


MP FLOMAX 10 (2" & 15 (3"))



Cast Iron, Bronze & Aluminum

UP TO 280 GPM, 120 TDH

- Temperatures to 200° F (250° F for Ryton)
- Open impeller
- Self-priming to 25 ft.
- Construction: glass reinforced Polyester, Polypropylene and Ryton
- Elastomer Options: Buna, EPDM and Viton
- Drive Options: pedestal mount, AC or DC voltages, single or three phase, ODP, TEFC, explosion proof and custom configurations

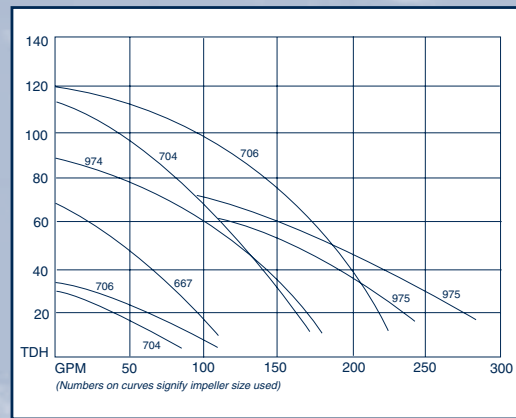


PACER (1 1/2", 2" & 3")



Electric Drive

UP TO 945 GPM, 180 TDH (1800 GPM - 6" PORTS)

- Temperatures to 160° F
- Open impeller
- Solids handling
 - 3" Ports - 3/4" diameter
 - 4" Ports - 1" diameter
 - 6" Ports - 1 1/2" diameter
- Construction: Cast Iron
- Mechanical Seal Options: Buna
- Drive Options: Pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

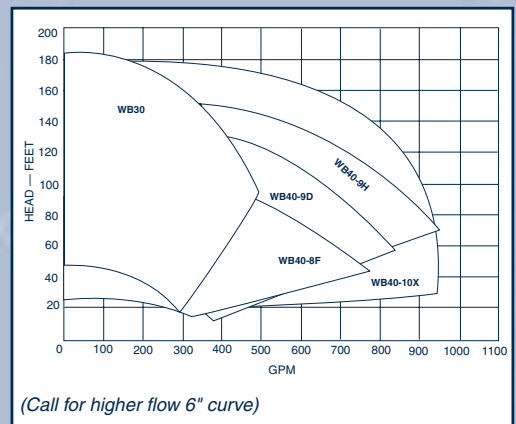

BURKS (3", 4" & 6")



Solids Handling Series