


**PRICE
(HP Series)**



3/4" in CPVC and Bronze

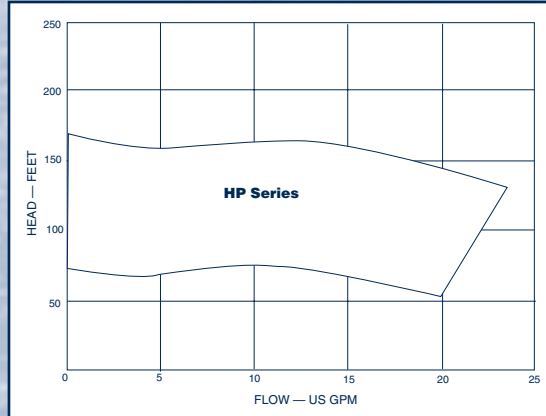


**UP TO 18 GPM,
160 TDH**

- Temperatures to 140° F
- Enclosed impellers
- Construction: CPVC or bronze housing, CPVC impeller, EPR gasket
- Elastomer Options: Buna standard, non-metallic version, other materials available
- Drive Options: 1/2 to 2 horsepower, AC and DC voltages, ODP, TEFC and custom configurations including pedestal mounting

**PRICE
(OH Series)**



3/4" x 1" in CPVC and PVDF

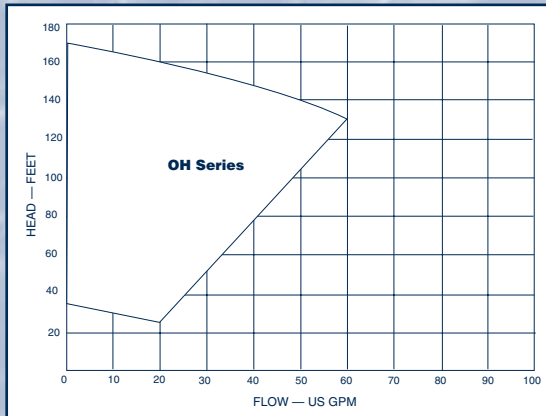


**UP TO 60 GPM,
160 TDH**

- Temperatures to 260° F (PVDF), 180° F (CPVC)
- Enclosed impeller
- Construction: CPVC or PVDF
- No metal to liquid contact
- Elastomers: EPR mech. seal, o-ring, others available including flush option
- Drive Options: 1/4 to 3 HP, AC and DC voltages, ODP, TEFC, XP, and custom configurations including pedestal mount and air drive

SHERTECH



CMP Series (1 1/2" x 1 1/2")

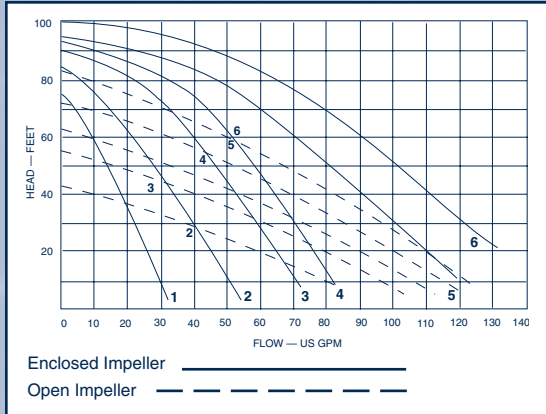


**UP TO 130 GPM,
100 TDH**

- Temperatures to 194° F
- Enclosed or semi-open impeller
- Housing Construction: Polypropylene or Noryl
- Elastomer Options: Buna, Neoprene and Viton, Silicon Carbide faces available (Polypropylene seal case available that eliminates all liquid to metal contact)
- Drive Options: pedestal mount, AC & DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations

PACER



PC Series (1 1/2", 2" & 3")

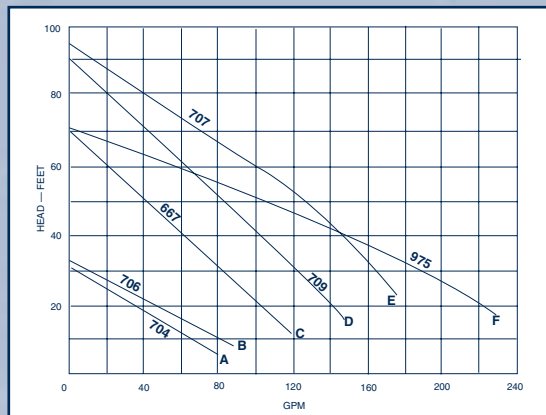

**UP TO 150 GPM,
90 TDH**

- Temperatures to 200° F
- Semi-open impeller
- Housing Construction: Thermoplastic, Noryl, Ryton or Polypropylene
- Elastomer Options: Buna, Neoprene, EPDM and Viton
- Drive Options: pedestal mount, AC & DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations