


OBERDORFER




Shaft Driven Series

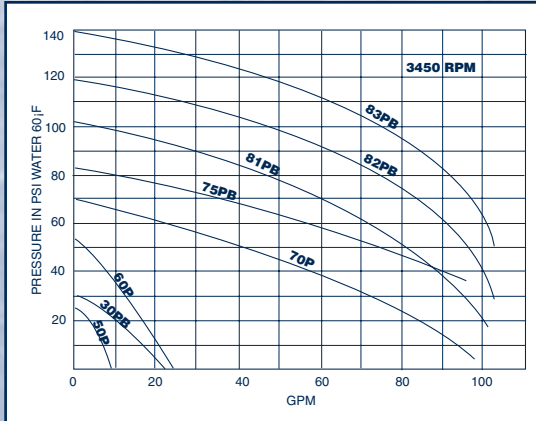

**UP TO 100 GPM,
130 TDH**

- Temperatures to 300° F
- Bronze Construction
- Buna or Viton mechanical seal
- Pulley or coupling driven
- 30PB & 75PB are self-priming models

MP (Cast Iron & Bronze)

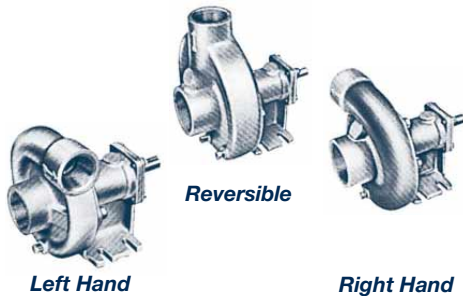


Reversible

Left Hand

Right Hand

30, 110, 130 & 200 Series

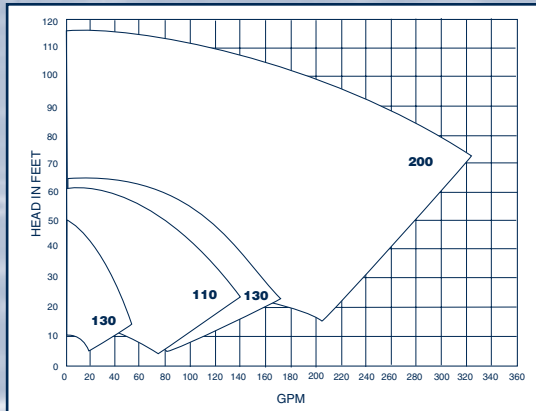


**UP TO 320 GPM,
115 TDH**

- Temperatures to 300° F
- Semi-open impeller
- Construction: cast iron or bronze
- Seal Options: Viton or packing
- Drive Options: pulley, clutch or electric motor

AMT (2")



Dredging Pump

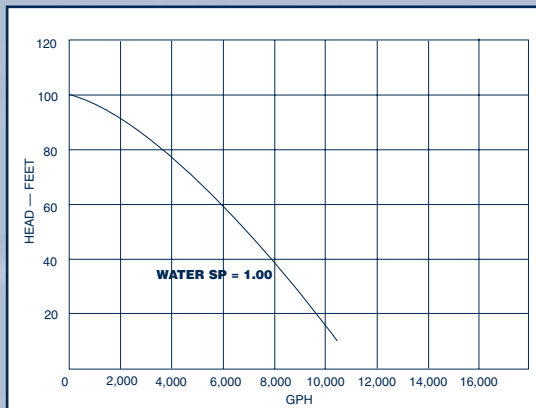


**UP TO 173 GPM,
100 TDH**

- Temperatures to 160° F
- Self-priming to 20 feet
- Handles up to 1/2" solids, 25% sand
- Construction: Cast Iron casing and adaptor with high Chromium Stainless Steel internal components
- Elastomers: Silicon Carbide/Buna mechanical seal
- Drive Options: 5.5 HP Honda OHV engine with oil alert (pedestal version available for electric or belt drive)

AURORA



Vertical Multi-Stage

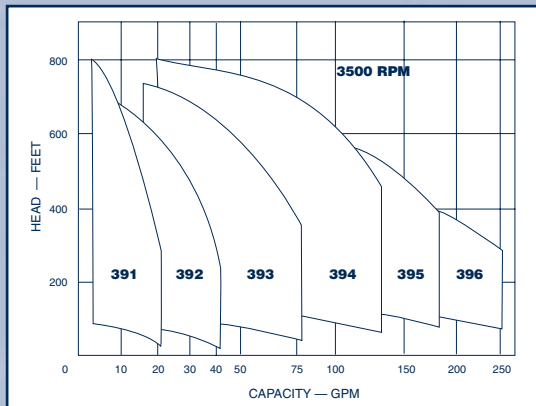

**UP TO 250 GPM,
800 TDH**

- Temperatures to 250° F
- Multi-staged enclosed impellers
- Construction: 304 Stainless
- Elastomers: EPDM o-rings, Carbon vs. Silicon Carbide seals
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations