

MARCH PUMPS FOR GRUNERT, ADLER-BARBOUR & OTHERS


Grunert P800 = MA 893-04-1/2 (brushless upgrade MA 893-09-1/2)
 Adler-Barbour E1390 = MA 893-04 (brushless upgrade MA 893-09)
 Technicold TE-27 = MA 893-04 (brushless upgrade MA 893-09)

Model Number	Volts	Amps	GPM at Feet of Head			Max. Head	Ports	
			1'	3'	6'		Inlet	Outlet
MA 893-04	12 vdc	1.0	2.7	2.4	2.0	10.5	3/8" FPT	3/8" OD
MA 893-04-1/2	12 vdc	1.0	2.7	2.4	2.0	10.5	3/8" FPT	1/2" OD
MA 893-06	24 vdc	0.6	2.7	2.4	2.0	10.5	3/8" FPT	3/8" OD
MA 893-09	12 vdc	1.0	2.7	2.4	2.0	10.5	3/8" FPT	3/8" OD
MA 893-09-1/2	12 vdc	1.0	2.7	2.4	2.0	10.5	3/8" FPT	1/2" OD
MA 893-10	24 vdc	0.6	2.7	2.4	2.0	10.5	3/8" FPT	3/8" OD



JABSCO/JOHNSON MAGNETIC DRIVE CENTRIFUGAL PUMPS

Brand	Model Number	Volts D.C.	Max Amps	GPM at 3 Feet of Head			Port Size
Jabco	JA 59500-0012	12	1.2	4.0			3/4" barb
Jabco	JA 59500-0024	24	0.7	4.0			3/4" barb
Johnson	JS 10-24487-03	12	1.0	3.7			3/4" barb
Johnson	JS 10-24487-04	24	0.6	3.7			3/4" barb
Johnson	JS 10-24486-11	12	0.9	3.3			5/8" barb
Johnson	JS 10-24504-03	12	2.2	7.1			3/4" barb
Johnson	JS 10-24504-04	24	0.9	7.1			3/4" barb

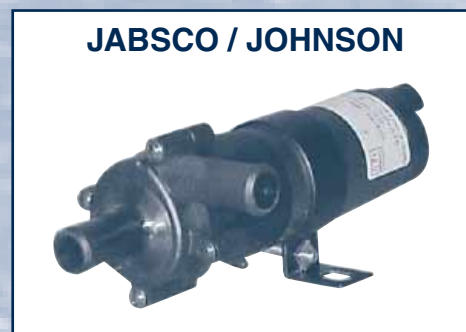

MARCH CONTINUOUS DUTY FOR GRUNERT & OTHERS

Grunert P900 = MA 809BRC-HS-12 ("C" stands for center inlet)

Model Number	Volts D.C.	Amps	GPM at Feet of Head			Max. Head	Ports	
			1'	3'	6'		Inlet	Outlet
MA 809BR-12	12 vdc	0.9	2.75	2.0	-	5.5	1/2" MPT	1/2" MPT
MA 809BR HS-12	12 vdc	2.7	5.50	5.1	4.7	17.0	1/2" MPT	1/2" MPT
MA 809BRC HS-12	12 vdc	2.7	5.50	5.1	4.7	17.0	3/4" MPT	1/2" MPT
MA 809BR-24	24 vdc	0.5	2.75	2.0	-	5.5	1/2" MPT	1/2" MPT
MA 809BR HS-24	24 vdc	1.5	5.50	5.1	4.7	17.0	1/2" MPT	1/2" MPT
MA 809BRC HS-24	24 vdc	1.5	5.50	5.1	4.7	17.0	3/4" MPT	1/2" MPT



FLOJET SELF-PRIMING DIAPHRAGM PUMPS

These Flojet self-priming diaphragm pumps will lift up to 6 feet, run dry without damage, and deliver up to 1.5 gpm. Each pump comes standard with quick connect 1/2" barbed ports. Additional port options are shown on page 17.

Model Number	Volts D.C.	Amps	GPM at Feet of Head			Max. Head	Ports*	
			1'	3'	6'		Inlet	Outlet
FJ 04105-512	12 vdc	1.2	1.5	1.5	1.5	50	1/2" barb	1/2" barb
FJ 04105-524	24 vdc	0.9	1.5	1.5	1.5	50	1/2" barb	1/2" barb

*Other port sizes are available, see page 17



PRIMO SELF-PRIMING CENTRIFUGAL PUMPS

The Primo self-priming centrifugal pump will lift up to 3 feet and will not air lock. It is constructed of bronze, has 3/4" FPT inlet and outlet, and can deliver 1 - 17 gpm.

Model Number	Volts D.C.	Amps	GPM at Feet of Head			Max. Head	Ports	
			1'	3'	6'		Inlet	Outlet
DP Primo 12V	12 vdc	10.5	17	14	8	16	3/4" FPT	3/4" FPT

