

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX

HOME


NEXT

BACK

4.3 GPM, 50 PSI JABSCO WASHDOWN/LIVEWELL PUMPS

The Jabsco 31700 series washdown pumps deliver an impressive 50 psi and up to 4.3 gpm. Its heavy duty low amperage motor with special waterproof coating and sealed pressure switch offer maximum corrosion protection in harsh environment installations. This series is also suitable for dual washdown/baitwell duty. See page 139 for service parts.


Model Number	Max. GPM	Volts	Amps at:		Inlet / Outlet	Dimensions (H x W x L)
			10 PSI	40 PSI		
JA 31700-0092	4.3	12 vdc	6.0	10.0	3/4" Barb and 3/4" GHT	4 1/16" x 4 1/8" x 9 3/8"
JA 31700-0094	4.3	24 vdc	3.0	5.0	3/4" Barb and 3/4" GHT	4 1/16" x 4 1/8" x 9 3/8"
JA 31605-0092	3.5	12 vdc	5.0	10	3/4" Barb and 3/4" GHT	4 1/16" x 4 1/8" x 8 5/8"
JA 31605-0094	3.5	24 vdc	2.5	5	3/4" Barb and 3/4" GHT	4 1/16" x 4 1/8" x 8 5/8"

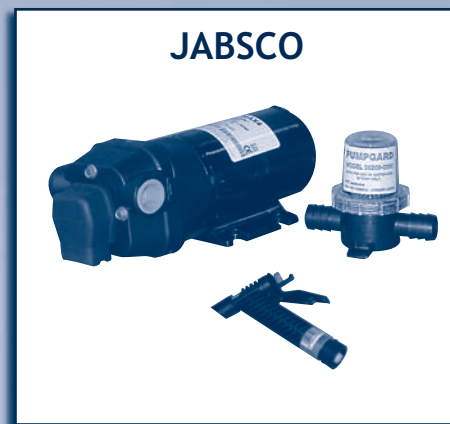

3.5 - 4.5 GPM, 40 PSI FLOJET WASHDOWN PUMPS

The Flojet automatic high velocity deck and anchor washdown pump will deliver up to 4.5 gpm and 40 psi. Models with the "L" suffix include a state of the art washdown nozzle with swivel disconnect check valve. See page 138 for service parts.

Model Number	Max. GPM	Volts	Amps at 10 PSI	Inlet / Outlet	Includes Nozzle	Dimensions (H x W x L)
FJ 04325-143	4.5	12 vdc	6.0	3/4" Barb and 3/4" GHT	No	3.9" x 6.3" x 9.9"
FJ 04325-143L	4.5	12 vdc	6.0	3/4" Barb and 3/4" GHT	Yes	3.9" x 6.3" x 9.9"
FJ 04325-343	4.5	24 vdc	3.0	3/4" Barb and 3/4" GHT	No	3.9" x 6.3" x 9.9"
FJ 04325-443	4.5	32 vdc	2.0	3/4" Barb and 3/4" GHT	No	3.9" x 6.3" x 9.9"
FJ 04305-144	3.5	12 vdc	5.0	3/4" Barb and 3/4" GHT	No	3.9" x 6.3" x 8.6"
FJ 04305-144L	3.5	12 vdc	5.0	3/4" Barb and 3/4" GHT	Yes	3.9" x 6.3" x 8.6"

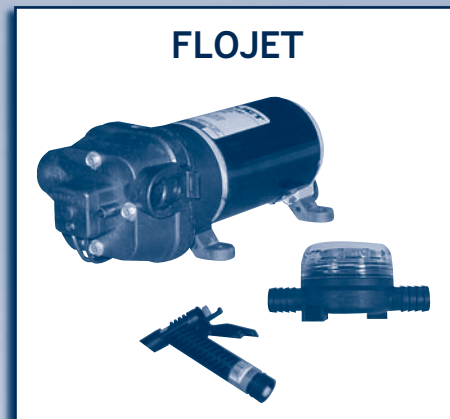

3.4 - 5 GPM, 40 PSI SHURFLO WASHDOWN/LIVEWELL PUMPS

The Shurflo Baitmaster pump is the pump of choice for baitwell and/or washdown applications in hostile environments. It comes with a continuous duty motor and waterproof coating. The new Extreme Pro Blaster is a high performance washdown duty pump with sealed motor and five gallon per minute capacity. The Blaster and Pro Blaster series are economical alternatives for intermittent washdown applications where the pump can be mounted away from exposure to direct water contact. All models have 1/2" MPT ports (hose adaptors are available). See page 138 for service parts on the 2088 series.

Model Number	Max. GPM	Volts	Amps at:		Model Name	Dimensions (H x W x L)
			10 PSI	40 PSI		
SF 2088-534-344	3.4	24 vdc	2.9	4.6	Blaster	4.4" x 5" x 8.9"
SF 2088-534-944	3.4	12 vdc	5.8	9.9	Pro Blaster	4.4" x 5" x 8.9"
SF 2088-574-734	3.6	24 vdc	2.1	9.5	Pro Baitmaster	4.4" x 5" x 9.9"
SF 5901-2212	5.0	12 vdc	8	12	Extreme Pro Blaster	5.5" x 5.5" x 9.25"
SF 5901-3212	5.0	24 vdc	4	6	Extreme Pro Blaster	5.5" x 5.5" x 9.25"



7 - 11 GPM, 50 PSI GROCO WASHDOWN PUMPS

The Groco C-60 series utilizes the dependable vane principle to deliver a smooth, high-pressure flow of salt or fresh water. Each pump comes with a 35 psi waterproof pressure switch, check valve, and washdown nozzle. The Groco PJRW and PSRW washdown pumps take advantage of the high-pressure lobe design of the popular Paragon water system pump series to deliver up to 11 gpm and up to 50 psi. This series is typically controlled with a foot or panel switch. It does not come with a demand pressure switch. (Use the Paragon series on page 12 for applications where a pressure switch is desired.) See page 146 and 147 for service parts.

Model	Max. GPM	Volts	Max. PSI	Breaker Size	Inlet	Outlet	Dimensions (H x W x L)
GC C-60 12V	7.0	12 vdc	35	30 Amps	1/2" FPT or 3/4" GHT	3/4" FPT	3.5" x 9.5" x 8.25"
GC C-60 24V	7.0	24 vdc	35	15 Amps	1/2" FPT or 3/4" GHT	3/4" FPT	3.5" x 9.5" x 8.25"
GC PJRW 12V	7.0	12 vdc	50	30 Amps	3/4" FPT	3/4" FPT	4.5" x 8.25" x 8.25"
GC PSRW 12V	11	12 vdc	50	50 Amps	3/4" FPT	3/4" FPT	8.25" x 5.5" x 20.5"

