


SHOWER SUMPS WITH PUMPS

LOVETT

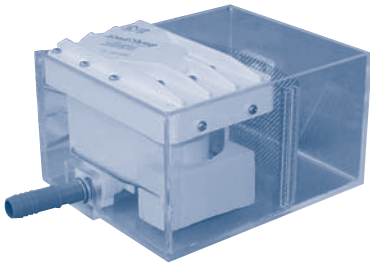


Automatic Shower Sump Pump

900 GPH, 12, 24 AND 32 VDC SHOWER SUMP

Lovett's shower sump incorporates a patented two-belt drive system that transmits power from motor shaft to pump shaft via pulleys all within the pump housing's trapped air cavity. This air pocket eliminates the need for a shaft seal to wear or corrode, the most common cause of pump failure. Lovett pumps are also unique because they offer repair parts. Service kit #LV 3200 (belts, switch and gasket). Replacement belt only #LV 2101.

Model Number	Volts	Max GPH	Amps	Inlet Port	Outlet Port Options	Dimensions (H x W x L)
LV 12VSS	12 vdc	900	4	1 1/2" Barb	3/4" Barb	5 3/4" x 9 1/2" x 7 3/4"
LV 24VSS	24 vdc	900	2	1 1/2" Barb	3/4" Barb	5 3/4" x 9 1/2" x 7 3/4"
LV 32VSS	32 vdc	900	2	1 1/2" Barb	3/4" Barb	5 3/4" x 9 1/2" x 7 3/4"
LV 12VSSRP	12 vdc	900	4	Replacement pump and motor for LV12VSS		
LV 24VSSRP	24 vdc	900	2	Replacement pump and motor for LV24VSS		
LV 32VSSRP	32 vdc	900	2	Replacement pump and motor for LV32VSS		

RULE

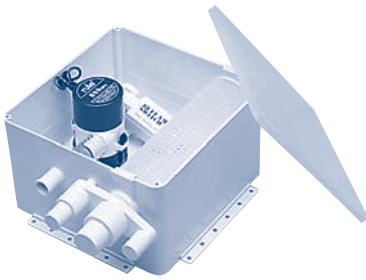

Shower Sump

500/800 GPH, 12 AND 24 VDC SHOWER SUMP

The rule shower sumps come in two flow rates (500 and 800 gallons per hour) and voltages (12 and 24 vdc). They offer a compact size, easily cleaned strainer, and the model #RU 98 offers multiple inlet ports for various sized lines (3/4", 1", 1 1/8" and 1 1/2" barbs). Both models utilize Rule's standard bilge pumps and Rule-A-Matic switches that are easily replaced when required.

Model Number	Volts	Max GPH	Amps	Inlet Port	Outlet Port Options	Dimensions (H x W x L)
RU 97	12 vdc	500	2	1 1/2" Barb	3/4" Barb	8 1/2" x 9 1/2" x 5 1/2"
RU 97-24	24 vdc	500	1	1 1/2" Barb	3/4" Barb	8 1/2" x 9 1/2" x 5 1/2"
RU 98	12 vdc	800	3	3/4", 1", 1 1/8" and 1 1/2" Barb	3/4" Barb	8 1/4" x 11 1/4" x 5 1/2"
RU 98-24	24 vdc	800	1.5	3/4", 1", 1 1/8" and 1 1/2" Barb	3/4" Barb	8 1/4" x 11 1/4" x 5 1/2"

JABSCO




Shower Sump

750 GPH, 12 AND 24 VDC SHOWER SUMP

Jabco's shower sump removes up to 750 gallons per hour and is available in 12 and 24 vdc. They are compact (5 1/2" high x 11 1/4" wide x 8 1/4" long), recommended for discharges up to 6 feet high and are supplied with multiple inlet ports for various sized lines (3/4", 1", 1 1/8" and 1 1/2" barbs). They utilize standard Jabco bilge pumps and float switches that are easily replaced when required.

Model Number	Volts	Max GPH	Amps	Inlet Port	Outlet Port Options	Dimensions (H x W x L)
JA 30296-2012	12 vdc	750	3	3/4", 1", 1 1/8" and 1 1/2" Barb	3/4" Barb	5 1/2" x 11 1/4" x 8 1/4"
JA 30296-2024	24 vdc	750	1.5	3/4", 1", 1 1/8" and 1 1/2" Barb	3/4" Barb	5 1/2" x 11 1/4" x 8 1/4"

LANCASTER

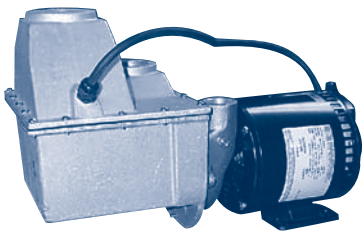

Sump-less Sump Pump

2150 GPH, 115 VAC SHOWER, SINK AND SEWAGE PUMP

This 115 vac automatic sump pump system is designed for shower sump, grey water or sewage. Its open impeller design will pass solids including garbage disposal waste. The pump comes with an integral reservoir that eliminates the need for a separate sump. It is constructed of aluminum with a brass clog proof impeller. Port sizes: 1 1/2" FPT inlet, 1" FPT outlet and 1/2" FPT vent.

Pump Model	Volts AC	Cord Length	GPH at Feet of Head					Inlet Port	Outlet Port	Dimensions (H x W x L)
			7'	9'	11'	13'	15'			
Lancaster #399	115	8'	2150	2000	1700	1300	1000	1 1/2" FPT	1" FPT	10" x 7 1/2" x 16 1/2"

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX

HOME

NEXT

BACK