

SELF-PRIMING CENTRIFUGALS

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX


HOME

NEXT

BACK

UP TO 130 GPM, 63 TDH

- Temperatures to 200° F
- Semi-open impeller
- Self-priming to 6 ft.
- Construction: bronze or 316 SS
- Seal Options: Viton® or Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations

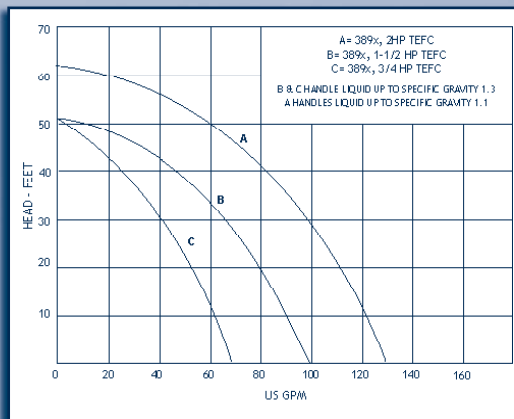


AMT (Stainless and Bronze)



1 1/2" Ports, 3890 Series

UP TO 280 GPM, 120 TDH

- Temperatures to 200° F (250° F for Ryton)
- Open impeller
- Self-priming to 25 ft.
- Construction: glass reinforced polyester, polypropylene and Ryton
- Elastomer Options: Buna, EPDM and Viton®
- Drive Options: pedestal mount, AC or DC voltages, single or three phase, ODP, TEFC, explosion proof and custom configurations

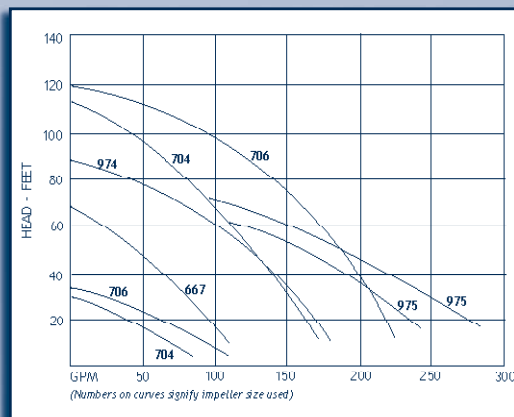


PACER (1 1/2", 2" and 3")




Electric Drive

UP TO 140 GPM, 100 TDH

- Temperatures to 300° F
- Semi-open impeller
- Self-priming to 25 ft.
- Construction: cast iron, bronze or aluminum
- Viton Seal Standard: other materials available
- Drive Options: pedestal mount, hydraulic, electric or manual clutch, gas or diesel engine, single or three phase, ODP, TEFC, explosion proof and custom configurations

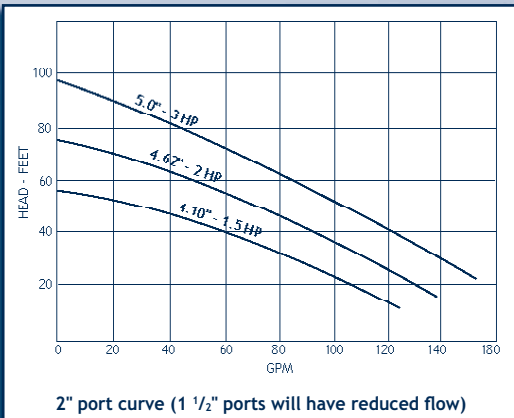


MP FLOMAX 5 (1 1/2") MP FLOMAX 8 (2")




Cast Iron, Bronze and Aluminum

UP TO 300 GPM, 125 TDH

- Temperatures to 300° F
- Semi-open impeller
- Self-priming to 25 ft.
- Construction: cast iron, bronze or aluminum
- Viton Seal Standard: other materials available
- Drive Options: pedestal mount, hydraulic, electric or manual clutch, gas or diesel engine, single or three phase, ODP, TEFC, explosion proof and custom configurations

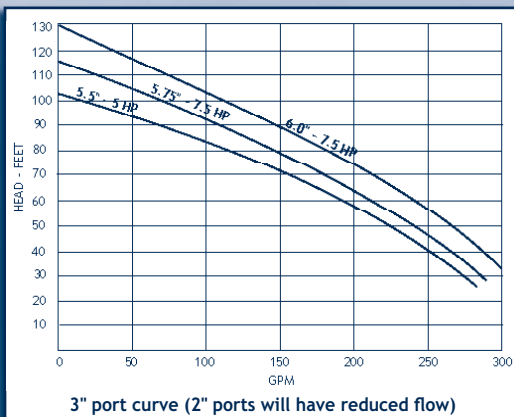

MP FLOMAX 10 (2") MP FLOMAX 15 (3")



Cast Iron, Bronze and Aluminum