



# BRONZE FLOODED SUCTION CENTRIFUGALS

## OBERDORFER

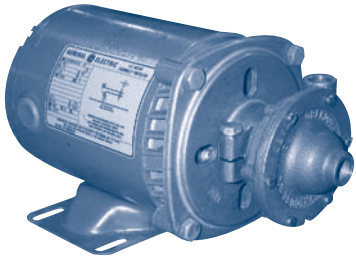

101M Series ( $\frac{3}{8}$ " x  $\frac{3}{8}$ " )

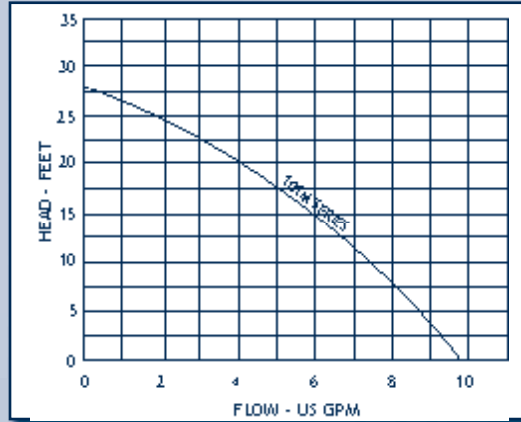

### UP TO 9 GPM, 27 TDH

- Temperatures to 300° F
- Semi-open impeller
- Bronze Construction
- Elastomer Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations
- See page 132 for service parts

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING


ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

## OBERDORFER



104M Series ( $\frac{1}{2}$ " x  $\frac{3}{4}$ " )

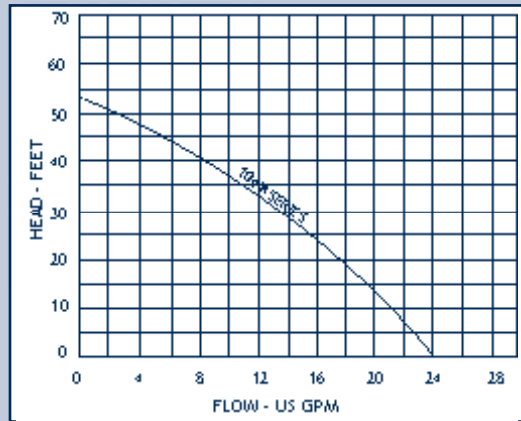

### UP TO 24 GPM, 52 TDH

- Temperatures to 300° F
- Semi-open impeller
- Bronze Construction
- Elastomer Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations
- Discharge port is  $\frac{1}{2}$ " FPT and  $\frac{3}{4}$ " MPT
- See page 132 for service parts


INDEX

HOME


NEXT

BACK

## OBERDORFER

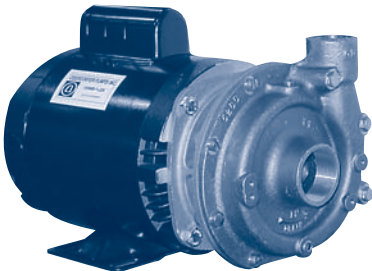


109MB / 700 Series (1" x 1  $\frac{1}{4}$ " )

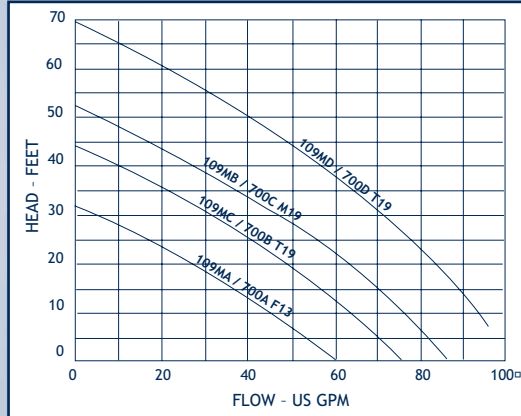


### UP TO 95 GPM, 70 TDH

- Temperatures to 300° F
- Semi-open impeller
- Bronze Construction
- Elastomer Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations
- See page 132 for service parts

## OBERDORFER

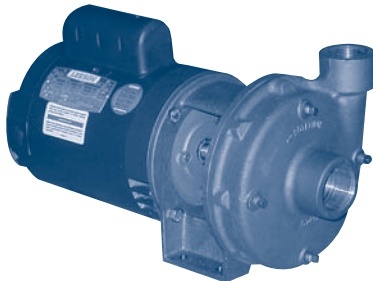

815/820/830B Series (1  $\frac{1}{4}$ " x 1  $\frac{1}{2}$ " )

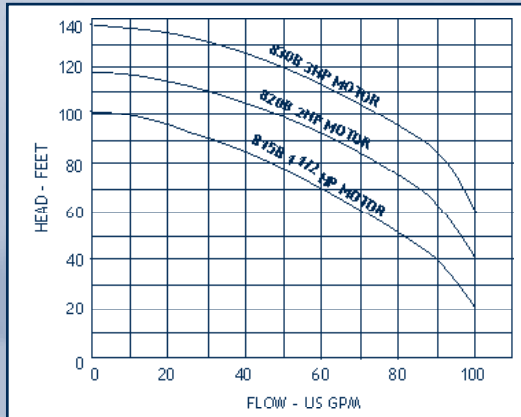

### UP TO 100 GPM, 135 TDH

- Temperatures to 300° F
- Enclosed impeller
- Construction: bronze
- Elastomer Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations