

BRONZE, CAST IRON & STAINLESS CENTRIFUGALS

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX


HOME

NEXT

BACK

UP TO 12 GPM, 48 TDH

- Temperatures to 300°F
- Semi-open impeller
- Housing Construction: 316SS or Bronze
- Requires flooded suction
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations

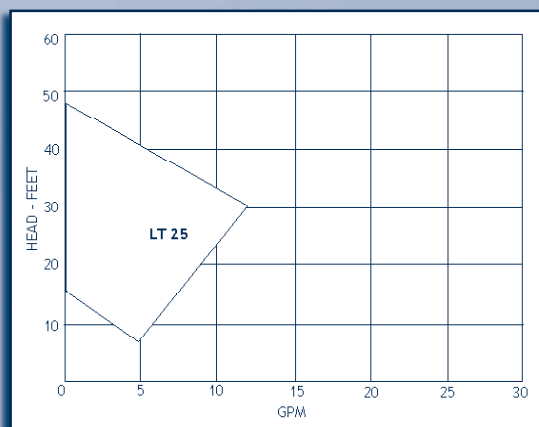


PRICE




LT25 Series (1/4" x 1/2")

UP TO 160 GPM, 100 TDH

- Temperatures to 300°F
- Semi-open impeller
- Housing Construction: 316SS, Cast Iron or Bronze
- Requires flooded suction
- Drive Options: pedestal mount, hydraulic, pneumatic, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

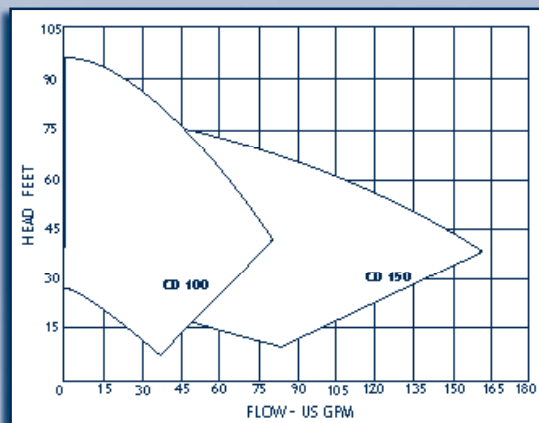


PRICE

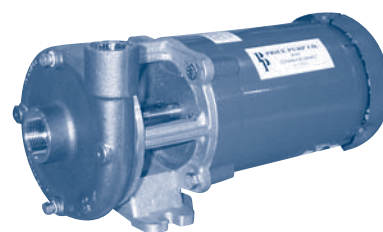


CD 100 Series (1" x 1 1/4")
CD 150 Series (1 1/2" x 2")

UP TO 400 GPM, 75 TDH

- Temperatures to 300°F
- Semi-open impeller
- Housing Construction: all iron and bronze fitted cast iron
- Requires flooded suction
- Drive Options: pedestal mount, hydraulic, pneumatic, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations

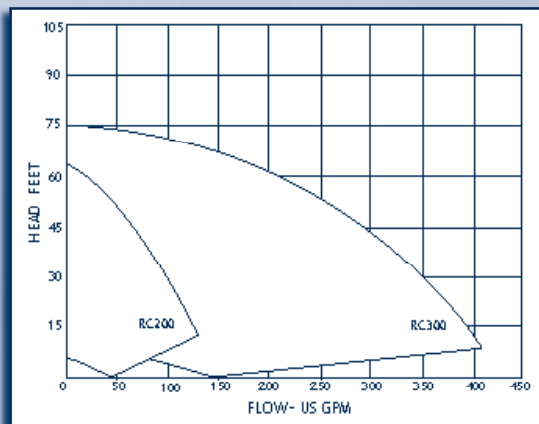


PRICE

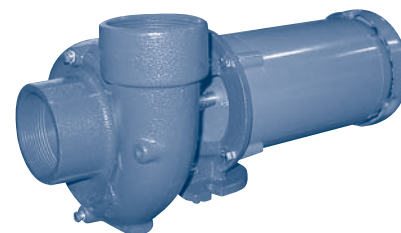


RC200 (2" x 2"), RC 300 (3" x 3")

UP TO 500 GPM, 300 TDH

- Temperatures to 300°F
- Enclosed impeller
- 150 lb. centerline ANSI flanges or NPT threaded ports
- Housing Construction: 316SS in flanged or threaded ports, cast iron or bronze in threaded ports
- Requires flooded suction
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof, and custom configurations

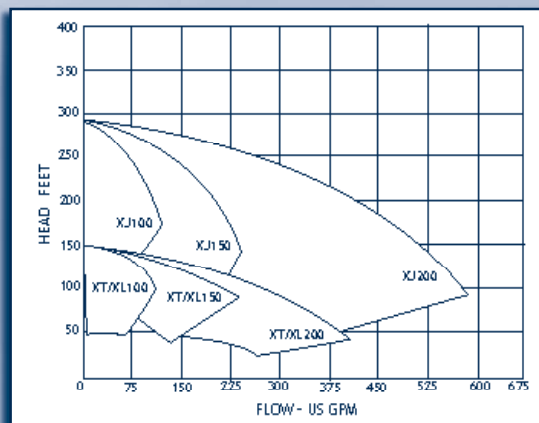

PRICE

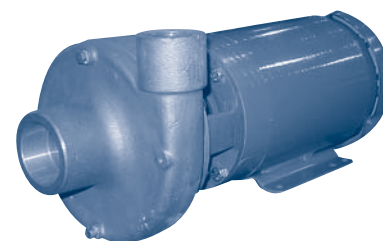

XL/XJ Series (Flange Ports)
XT Series (Threaded Ports)