



# NICKEL ALUMINUM BRONZE AND STAINLESS

## AMPCO

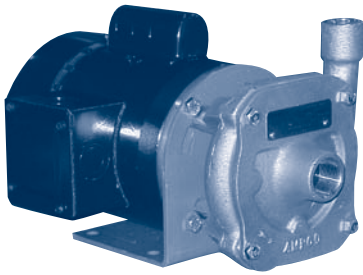


KC2 (3/4" x 1")

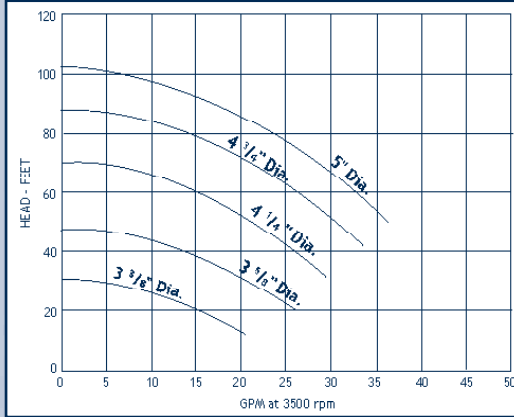


### UP TO 35 GPM, 100 TDH

- Enclosed impeller
- Nickel aluminum bronze or 316SS construction
- Seal Options: multiple Type 21 and Type 9 mechanical seals
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

## AMPCO

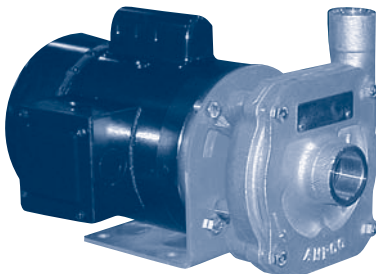

KC2 (1" x 1 1/4" / 1 1/2")

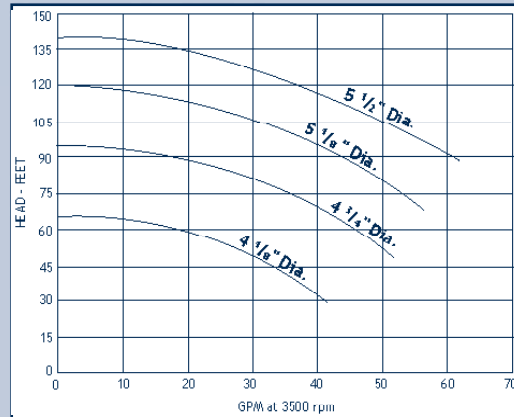


### UP TO 62 GPM, 140 TDH


- Enclosed impeller
- Nickel aluminum bronze or 316SS construction
- Seal Options: multiple Type 21 and Type 9 mechanical seals
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

*Performance curve displays flow for 1 1/2" x 1" ports, call for performance on 1 1/4" x 1" ports.*

## AMPCO

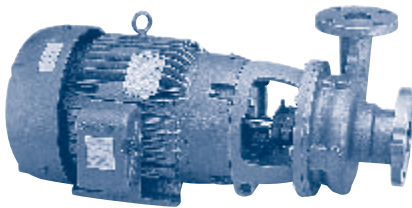


E Series (1 1/4" x 1 1/2" to 3" x 4")

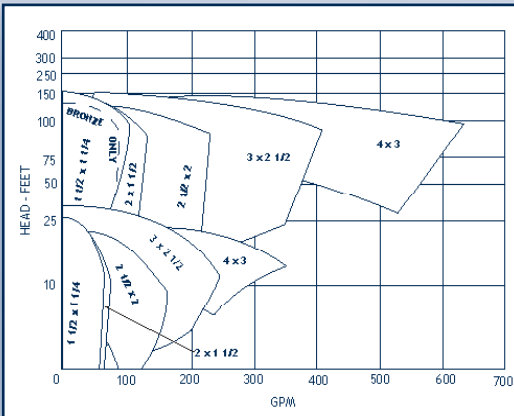


### UP TO 600 GPM, 200 TDH

- Enclosed impeller
- Nickel aluminum bronze or 316SS construction
- Seal Options: multiple single and double Type 21, Type 9, cartridge seals and packing seals
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

## AMPCO

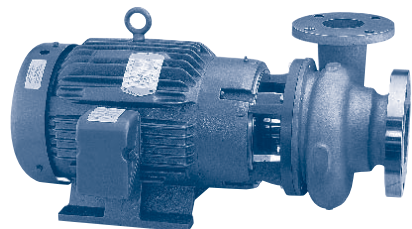

Z Series (1 1/4" x 1 1/2" to 6" x 6")

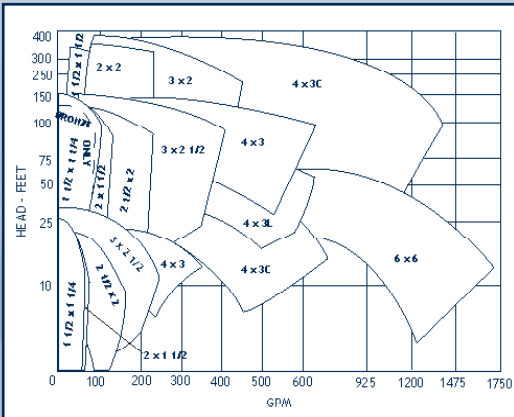

### UP TO 1600 GPM, 375 TDH

- Enclosed impeller
- Nickel aluminum bronze or 316SS construction
- Seal Options: multiple Type 21, Type 9, and Type 1 mechanical seals
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX

HOME

NEXT

BACK