

# SELF-PRIMING SHOWER SUMP PUMPS

CONTENTS

## 3.4 GPM JABSCO 31610 SERIES SHOWER PUMP

Jabco's 31610 series shower and grey water pump comes standard with a continuous duty DC motor with a waterproof coating for harsh bilge environments. They can be operated with a manual on/off switch or automatic level control (see page 34), will self-prime to 10 feet, come with 3/4" barbed ports and includes a 3/4" suction strainer. See page 153 for service parts.

ENGINE COOLING

INDEX


HOME

NEXT

BACK

Model Number	Volts	Amps at 10 psi	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 31610-0092	12 vdc	5	3.5	3/4" Barb	4.1" x 4.2" x 7.7"
JA 31610-0094	24 vdc	3	3.5	3/4" Barb	4.1" x 4.2" x 7.7"

JABSCO

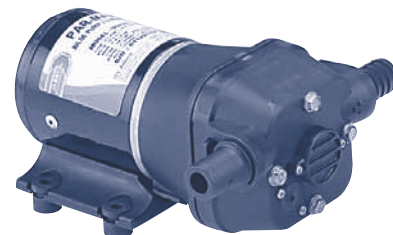

31610 Series

## 3.3 GPM FLOJET 4105 SERIES SHOWER PUMP

The Flojet 4105 shower and grey water pump will lift water up to 10 feet and will not be damaged by running dry. It can be operated with a manual on/off switch or automatic level control (see page 34) and comes standard with 1/2" barbed ports. However, 3/4" barbed port fittings (page 64) and suction strainers (page 65) are available separately. See page 149 for service parts.

Model Number	Volts	Amps at 10 psi	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
FJ 04105-143	12 vdc	3.6	3.3	1/2" Barb	3.9" x 4.2" x 7.7"
FJ 04105-343	24 vdc	1.8	3.3	1/2" Barb	3.9" x 4.2" x 7.7"

FLOJET



4105 Series

## 3.7 GPH JABSCO 50880 SERIES SHOWER PUMP

Jabco's 50880 series shower and grey water pump features a unique, 360° rotating head for flexible installation. This pump self-primers up to six feet and will run dry without damage. No-clog, filterless design means easy maintenance. Complies with USCG 183.410 and ISO 8846 Marine (Ignition Protection).

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
50880-1000	12 vdc	15A	3.7	3/4" Barb	4.4" x 5.9" x 11.7"
50880-1100	24 vdc	7A	3.7	3/4" Barb	4.4" x 5.9" x 11.7"

JABSCO



50880 Series

## 3.5 GPM WHALE GULPER 220 SHOWER PUMP

The Whale Gulper 220 shower and grey water pump incorporates inlet and outlet duckbill valves that are specifically designed to pump wastewater without clogging. This eliminates the need for a suction filter. Each pump can be operated with a manual on/off switch or automatic level control (see page 34), will self-prime to 12 feet vertically, run dry without damage and come with 3/4" barbed ports that can be repositioned in any inline direction by loosening the body clamp ring. (Repair Kit = IM AK1550)

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
WH BP1552	12 vdc	10	3.5	3/4" Barb	4 5/8" x 6 3/4" x 10 3/4"
WH BP1554	24 vdc	6	3.5	3/4" Barb	4 5/8" x 6 3/4" x 10 3/4"

WHALE



Gulper 220 Series