

# SUBMERSIBLE BILGE PUMPS

## SHURFLO



Piranha Series

## CARTRIDGE-STYLE BILGE PUMPS IN 12 VDC

The Shurflo Piranha™ bilge pumps feature high-density nylon housings, tinned copper wire and heavy-duty water cooled motors. Removable cartridge design allows for easy cleaning or replacement. Three year warranty.

Model Number	GPH at 0 Feet	Volts	Amps	Hose Dia.	Dimensions (H x W x L)
SF 357-011-10	500	12 vdc	1.8	3/4"	4 1/2" x 2 3/8" x 3 3/4"
SF 357-111-10	700	12 vdc	3.2	3/4"	4 1/2" x 2 3/8" x 3 3/4"
SF 357-101-10	1000	12 vdc	3.2	1 1/8"	4 1/2" x 2 3/8" x 3 3/4"

CONTENTS

ENGINE COOLING

INDEX

HOME

NEXT

BACK

## SHURFLO



Magnetic Drive Series

## MAGNETIC DRIVE AUTOMATIC PUMPS IN 12 VDC

These innovative pumps are specially designed for exceptional durability and reliability. These magnetic drive, automatic bilge pumps will clear airlocks, will run dry and won't burn up if clogged. If the impeller locks up, the magnets simply break free, protecting the motor from burnout. Pumps turn on only when needed. Cleaning is fast and easy.

Model Number	GPH at 0 Feet	Description	Hose Dia.	Dimensions (H x W x L)
SF 1700-121-010	1000	12 vdc Cont. Duty	1 3/4"	6 1/2" x 5 1/4" x 5 1/4"
SF 1700-101-010	500	12 vdc Cont. Duty	3/4"	6 1/2" x 5 1/4" x 5 1/4"

## JOHNSON



750


4000

## 550 - 4000 GPH PUMPS IN 12 VDC AND 24 VDC

Johnson bilge pumps feature rugged design using high quality materials. The 550 - 1250 gph models have cartridge-style motors for easy cleaning. The heavy duty 1600 - 4000 gph pumps feature liquid cooled motors with double ball bearings and either lip seals (1600) or mechanical shaft seals (2200 and 4000) for extended life.

Model Number	GPH at 3 Feet	Volts	Amps	Hose Dia.	Dimensions (H x W x L)
550 JS 32503	601	12	2.5	3/4"	4 1/2" x 2 3/4" x 4"
750 JS 32703	713	12	3	3/4"	4 1/2" x 2 3/4" x 4"
950 JS 32903	844	12	3.2	3/4"	4 1/2" x 2 3/4" x 4"
1250 JS 42123	952	12	3	1 1/8"	4 1/2" x 2 3/4" x 4"
1600 JS 16004	1550	12	7	1 1/8"	6" x 4.25" x 6 1/2"
2200 JS 22004	1900	12	7.5	1 1/8", 1 1/2"	7" x 4" x 6 1/2"
2200 JS 22084	1900	24	4.5	1 1/8", 1 1/2"	7" x 4" x 6 1/2"
4000 JS L40004	2600	12	15	1 1/2", 2"	8 1/2" x 4 3/4" x 6 1/2"
4000 JS L40004-24V	2600	24	7.5	1 1/2", 2"	8 1/2" x 4 3/4" x 6 1/2"

## LOVETT

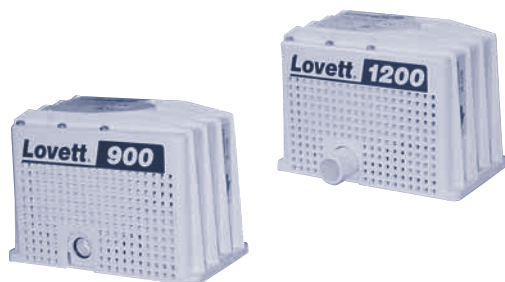

Heavy Duty "Repairable" Series

## HEAVY DUTY "REPAIRABLE" PUMPS IN 6 - 32 VDC

Lovett automatic bilge pumps will not airlock! Lovett's patented design incorporates two belts running over phenolic pulleys to transmit power from motor shaft to pump shaft all within the trapped air cavity the pump housing creates. This air pocket eliminates the need for a shaft seal to wear or corrode, the most frequent cause of pump failure. Service kit #LV 3200 (belts, switch and gasket). Replacement belt only #LV 2101.

Model Number	GPH at 0 Feet	Volts	Amps	Outlet	Dimensions (H x W x L)
LV 1200-12V AM	1193	12 vdc	5	1 1/8"	5 1/4" x 5 11/16" x 8"
LV 1200-24V AM	1193	24 vdc	3	1 1/8"	5 1/4" x 5 11/16" x 8"
LV 1200-32V AM	1193	32 vdc	3	1 1/8"	5 1/4" x 5 11/16" x 8"
LV 900-12V AM	900	12 vdc	5	3/4"	5 1/4" x 5 11/16" x 8"
LV 900-6V AM	900	6 vdc	10	3/4"	5 1/4" x 5 11/16" x 8"
LV 900-24V AM	900	24 vdc	3	3/4"	5 1/4" x 5 11/16" x 8"
LV 900-32V AM	900	32 vdc	8	3/4"	5 1/4" x 5 11/16" x 8"