

CONTENTS

ENGINE COOLING


INDEX

HOME

NEXT


BACK

SELF-PRIMING VS. SUBMERSIBLE BILGE PUMPS

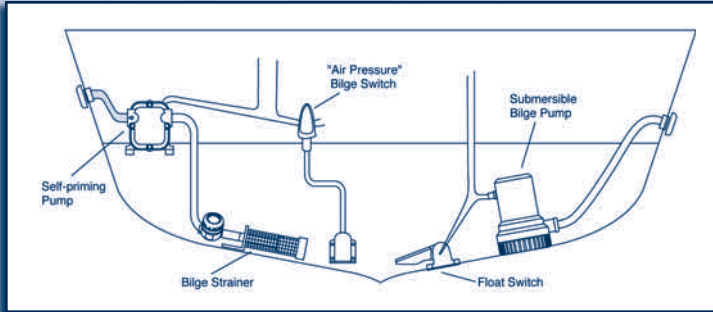

A submersible pump is the most efficient and least expensive way to move a high volume of water in a short amount of time. However, it is not always possible to mount a submersible pump in the space available, and submersible pumps are only capable of moving liquid a short distance. Self-priming pumps can be mounted above the bilge area in a convenient location of your choosing and are designed to overcome much greater back pressure. When choosing a self-priming bilge pump be aware that some types can be damaged when run dry while others are not (example: diaphragm type).


SELF-PRIMING, DRY RUNNING BILGE PUMPS




The diaphragm pumping principle is self-priming and will run dry indefinitely. Small and economical direct drive models will quickly lift bilge water up and force it overboard in short order. Larger sizes will easily pass solids that might pass through your strainer without clogging. Sizes are available that will deliver up to 20 gallons per minute. See page 39 for details.

EMERGENCY BACK-UP BILGE PUMPS

Every boat should have a back-up bilge pump. Either a manual diaphragm or piston design or the emergency electric or engine drive variety. It's also not a bad idea to have a 115 vac submersible bilge pump on your dock for quickly saving your boat from a trip to the bottom caused by low battery, broken seacock or overwhelming storm.

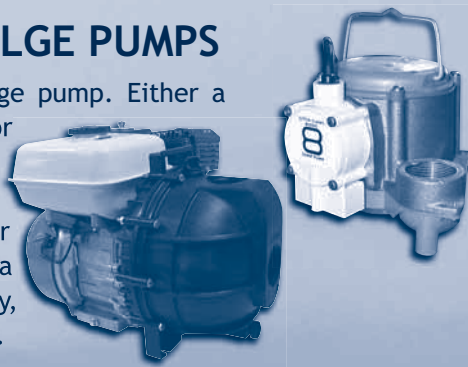

6" SALVAGE PUMP BY GORMAN RUPP



Gorman Rupp manufactures a full range of true trash pumps with front clean-out, silicon carbide seal, ductile iron impeller, replaceable wearplate and solid cast iron or cast aluminum housings. Most configurations are available in roll cage or cart mounting in 2" to 6" ports, flows to 1200 gpm, suction lift of 25 feet and diesel or gas engines. See page 38.

115VAC.....	33, 35-39, 80-82, 98
Clutch Driven	40, 98
Engine Driven	38, 81, 82
Float Switches	34
Hydraulic Driven	40, 82
Manual Operation	39, 60, 79, 93
Self-Priming Bilge	35-40, 80-82, 98
Shower Sump	30, 31, 35
Submersible Bilge	32, 33, 38, 79
Trash Pump.....	38
Bosworth	39, 60, 79
Edson	79
Flojet	31, 35
Gianneschi	93, 98
Flotec	36
Gorman Rupp	38
Goulds	79
Jabco	31, 35-37, 39, 40
Johnson.....	30, 32, 40
Lovett.....	30, 32
MP	40, 81
Oberdorfer	36, 40, 80
Pacer	40, 82
Proven	36
Rule	30, 33, 39
Shurflo	32
Simer.....	36
Whale.....	31, 35, 39
Yamada	79

PICKING THE RIGHT FLOAT SWITCH

Matching the float switch to your pump and boat is vital for dependably keeping your boat afloat. Always verify that the switch is rated for your pump's voltage and amperage. The typical "hinged" float switch operates satisfactorily in most installations. However, we highly recommend using a switch guard to prevent debris in the bilge from blocking proper operation. "Air Pressure" actuated switches are ideal for bilge areas where there is not room for a submersible switch (or pump for that matter). Electronically actuated float switches have come a long way since their introduction. Several models are extremely dependable and will far outlive the traditional "hinged" float switch. See page 34.

