



# High-Pressure Multi-Stage Booster Pump

## MODEL

5GB, 7GB, 10GB,  
18GB, 25GB, 33GB

### APPLICATIONS

- Residential, commercial or agricultural pressure wash
- Reverse osmosis
- Evaporative cooling systems/misters
- Booster service
- Spray systems
- Water circulation
- Filtration
- HVAC
- General purpose pumping

### FEATURES

■ **Multi-stage Design:** Provides steady, quiet, vibration free, operation.

■ **Optional Stainless Steel Construction:** Standard cast iron for general service or stainless for filtration applications.

■ **O-Ring Casing Seal:** Reliable high pressure sealing with easy disassembly for maintenance or repair.

■ **Impellers and Diffusers:** Glass filled engineered composite material with a fixed impeller design. High resistance to corrosion and abrasion.

■ **Bowls:** 300 stainless steel rabbit lock for positive alignment with no gaskets required.

■ **Variable Capacity:** Centrifugal pump design permits selection of flow within a range for each size.

■ **Mechanical Seal:** A variety of face materials and elastomers to match application needs.

■ **Motors:** Close coupled NEMA 56J motors in open drip proof or totally enclosed design. Single phase and three phase available. Ball bearings carry all radial and axial thrust loads. Designed for continuous operation.

### SPECIFICATIONS

#### Pump:

- Maximum suction (inlet) pressure: 75 PSI.
- Maximum Liquid Temperature: 160° F (71° C).
- Rotation: Clockwise when viewed from motor end.
- Maximum lift with foot valve: 10 ft. check NPSH curve.

#### Motor:

- NEMA standard 56J frame.
- Open drip proof or totally enclosed fan cooled enclosures available as standard. Consult factory for other options.
- 60 Hz, 3500 RPM. Single phase (115/230 V), three phase 208-230 (3 HP, 230 V) or three phase (208-230/460 V).
- Single phase motors have built-in capacitor and overload with automatic reset.

**Note:** For three phase motors, overload protection must be provided in starter unit. Starter and heaters must be ordered separately.


# High-Pressure Multi-Stage Booster Pump

## PERFORMANCE CURVES


5GB, 7GB, 10GB,  
18GB, 25GB, 33GB



### PERFORMANCE COVERAGE 60 HZ, 3500 RPM

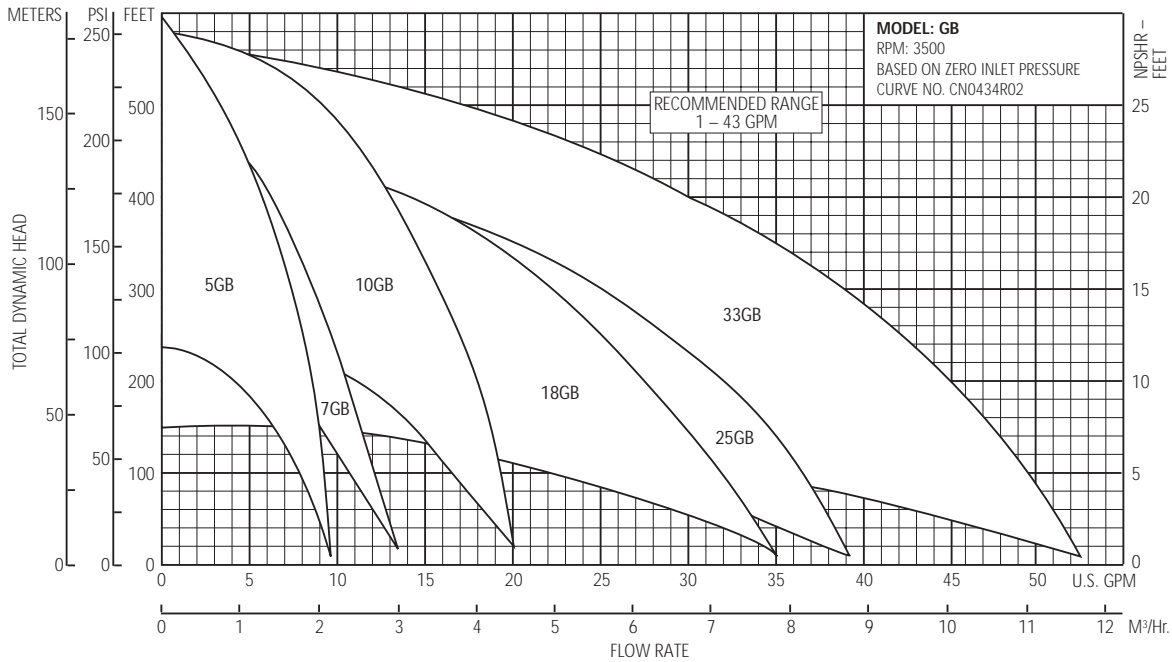

### PERFORMANCE COVERAGE 50 HZ, 2900 RPM

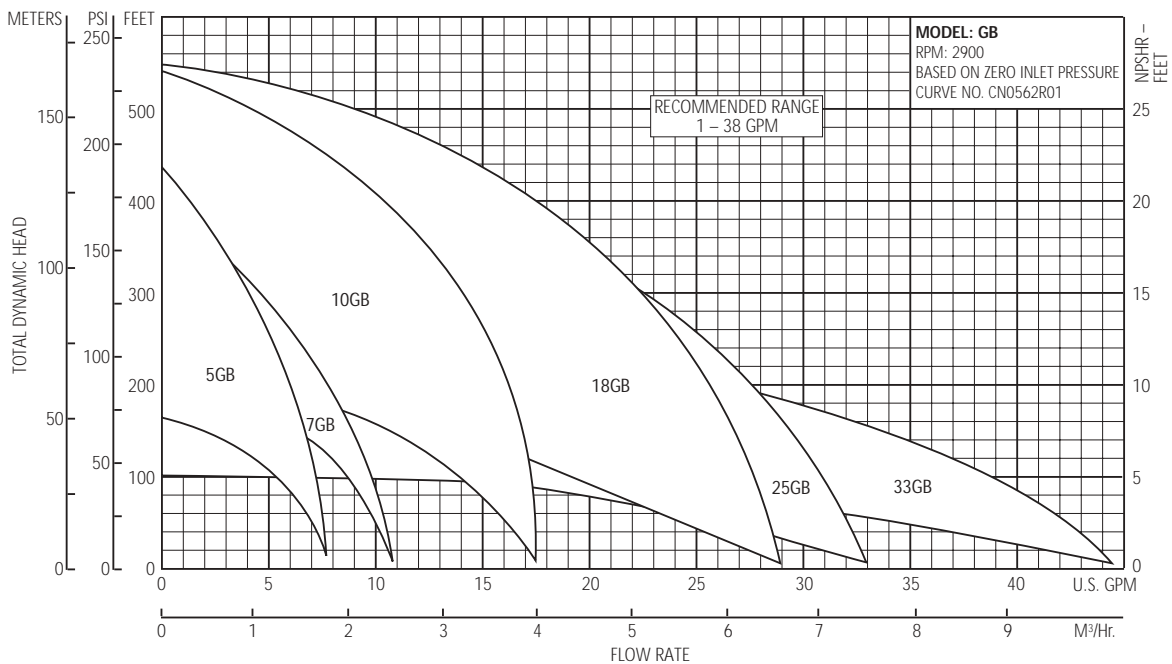

## GB NUMBERING SYSTEM

The various versions of the Series GB are identified by a product code number on the pump label. This number is also the catalog number for the pump. The meaning of each digit in the product code number is shown below. The following are the standard 60 Hz product numbers and are built with Single Phase ODP motors and standard staging. The cast iron version uses Seal Code 0 and the stainless version uses Seal Code 4.

Order No.		Description				
Cast Iron	Stainless	HP	Phase	Voltage	Enclosure	Stages
5GBC03	5GBS03	1/3	1	115-230	ODP	7
5GBC05	5GBS05	1/2				9
5GBC07	5GBS07	3/4				14
5GBC10	5GBS10	1				17
7GBC05	7GBS05	1/2				9
7GBC07	7GBS07	3/4				13
7GBC10	7GBS10	1				16
10GBC07	10GBS07	3/4				8
10GBC10	10GBS10	1				10
10GBC15	10GBS15	1 1/2				15
10GBC20	10GBS20	2				17

Order No.		Description				
Cast Iron	Stainless	HP	Phase	Voltage	Enclosure	Stages
18GBC07	18GBS07	3/4	1	115-230*	ODP	5
18GBC10	18GBS10	1				7
18GBC15	18GBS15	1 1/2				9
18GBC20	18GBS20	2				13
18GBC30	18GBS30	3				15
25GBC07	25GBS07	3/4				5
25GBC10	25GBS10	1				7
25GBC15	25GBS15	1 1/2				9
25GBC20	25GBS20	2				10
25GBC30	25GBS30	3				14
33GBC10	33GBS10	1				5
33GBC15	33GBS15	1 1/2				7
33GBC20	33GBS20	2				9
33GBC30	33GBS30	3				13

\* All 3 HP motors are 230V only.

## GB NUMBERING SYSTEM

For optional motor enclosures, seals and three phase configurations use the following product code system.

### Example Code

5 GB C 05 1 5 J 0

#### MECHANICAL SEAL AND O-RING

0 = Standard on Cast Iron and 4 = Standard on Stainless Steel.

For Optional Mechanical Seal modify catalog order no. with Seal Code listed below.

Mechanical Seal (5/8" seal)						
Seal Code	Rotary	Stationary	Elastomers	Metal Parts	Part No.	Casing O-Ring
0	Carbon	Ceramic	BUNA	18-8SS	10K10	BUNA
3		Sil-Carbide	EPR	316SS	10K18	EPR
4			Viton		10K55	Viton

#### NUMBER OF STAGES

A = 1 D = 4 G = 7 K = 10 N = 13 R = 16 U = 19 X = 22  
 B = 2 E = 5 H = 8 L = 11 P = 14 S = 17 V = 20 Y = 23  
 C = 3 F = 6 J = 9 M = 12 Q = 15 T = 18 W = 21 Z = 24

#### DRIVER

1 = 1 PH, ODP  
 2 = 3 PH, ODP  
 3 = 3 PH, 575V ODP  
 4 = 1 PH, TEFC  
 5 = 3 PH, TEFC

#### DRIVER: HERTZ/POLE/RPM

1 = 60 Hz, 2 pole, 3500 RPM  
 2 = 50 Hz, 2 pole, 2900 RPM

#### HP RATING

03 = 1/3 HP  
 05 = 1/2 HP  
 07 = 3/4 HP  
 10 = 1 HP  
 20 = 2 HP  
 30 = 3 HP  
 50 = 5 HP

#### MATERIAL - DISCHARGE, HEAD AND SUCTION HOUSING

C = Cast Iron  
 S = Stainless Steel

#### PUMP MODEL

GB


#### GALLONS PER MINUTE

5 7 10 18 25 33

**Note:** Not recommended for operation beyond recommended range specified on H-Q curve.

For critical application conditions consult factory.

**Note:** Not all combinations of motor, impeller and seal options are available for every pump model. Please check with Goulds Pumps on non-cataloged numbers.

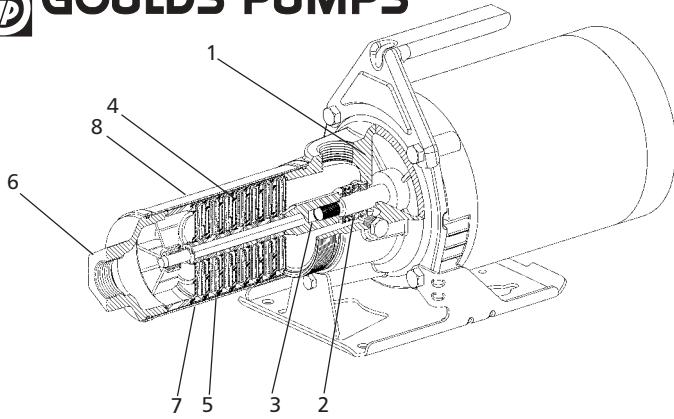

### MATERIALS OF CONSTRUCTION

Item	Description	Material
1	Motor Adapter	Cast Iron or Cast 304 Stainless Steel
2	Mechanical Seal	0 = Carbon/Ceramic/BUNA 3 = Carbon/Silcar/EPR 4 = Carbon/Silcar/Viton
3	Shaft Coupling	Stainless Steel
4	Impeller/Diffuser	Engineered Composite
5	Bowl	304 Stainless Steel
6	Discharge Head	Cast Iron or Cast 304 Stainless Steel
7	Hex Shaft	Stainless Steel
8	Casing	304 Stainless Steel

### DIMENSIONS AND WEIGHTS FOR 60 HZ PUMPS

Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
5GB	7	9.19	11.19	1/3	10.5	41
	9	10.62	12.62	1/2	10.5	41
	14	15.12	17.12	3/4	10.62	46
	17	17.12	19.12	1	11.25	50

### DIMENSIONS AND WEIGHTS FOR 50 HZ PUMPS



Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
5GB	7	9.19	11.19	1/3	10.5	41
	10	11.31	13.31	1/2	10.5	42
	16	16.50	18.50	3/4	10.62	47
	19	18.50	20.50	1	11.25	51

### SPECIFICATIONS



- Capacities: to 8 GPM.
- Maximum Flow: 8 GPM.
- Heads: to 600 ft. (260 PSI).
- Minimum Flow: 1 GPM.
- Pipe Connections: 1" NPT Suction and Discharge.


### WARNINGS

- Pumps used on open spray applications must be plugged into electrical service which is protected by a Ground Fault Service Interruptor. Failure to do so may result in serious personal injury or death and property damage.
- Do not run pump dry.
- Do not run pump below minimum flow.
- If positive suction pressure is not available, be sure pump and suction line (with foot valve) are primed before starting pump.

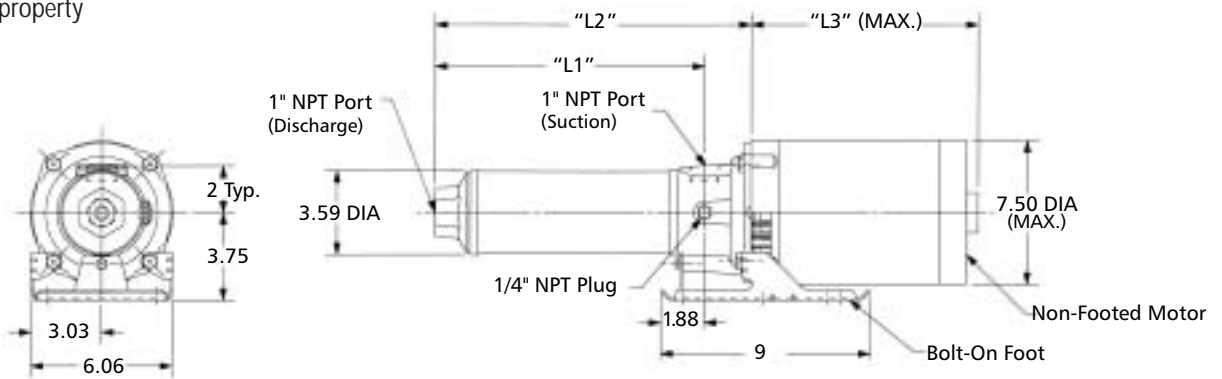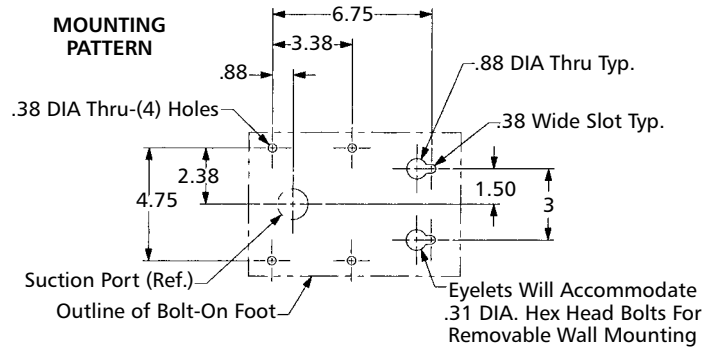

# 5GB

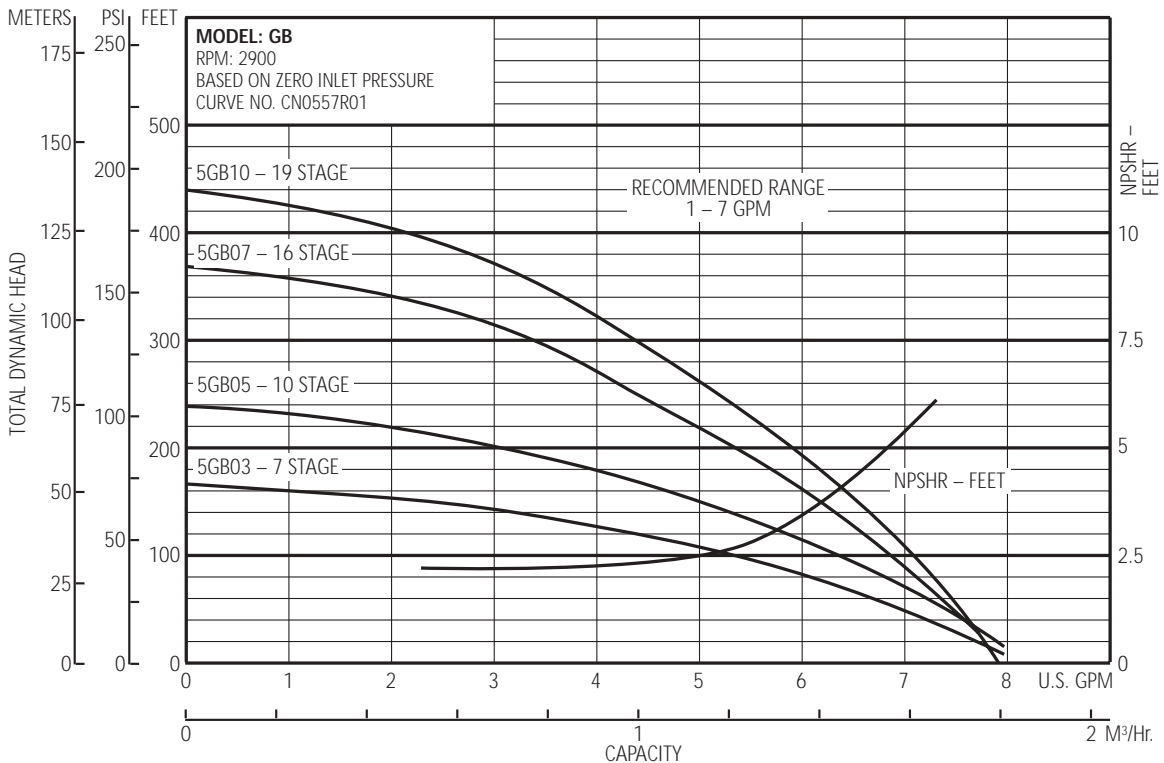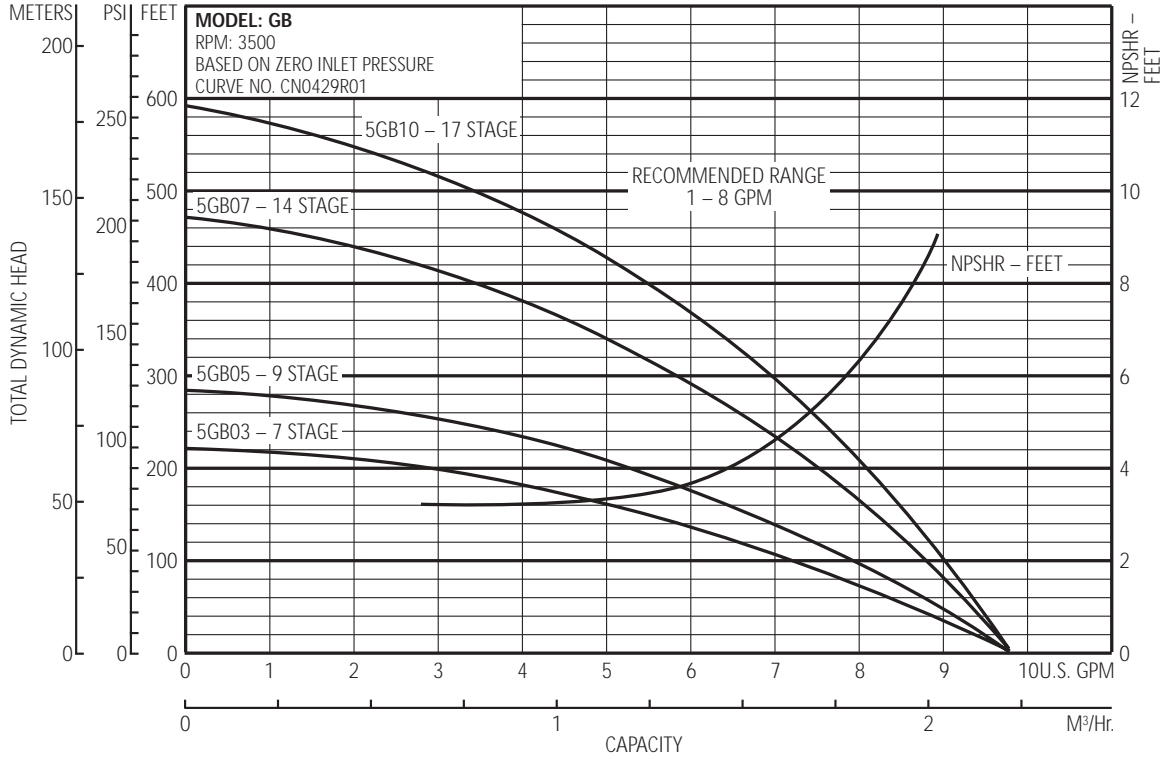

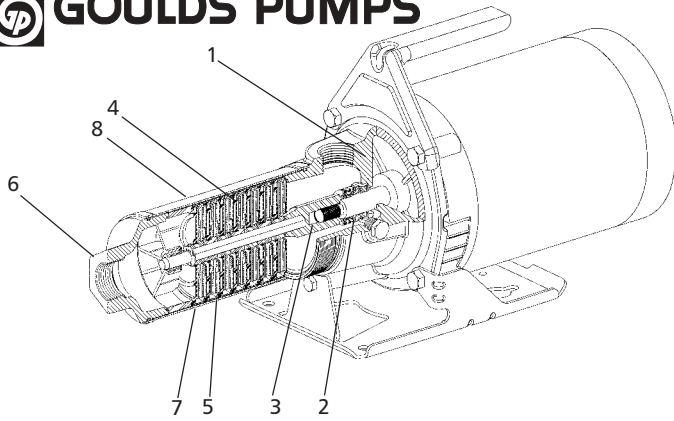

### MATERIALS OF CONSTRUCTION

Item	Description	Material
1	Motor Adapter	Cast Iron or Cast 304 Stainless Steel
2	Mechanical Seal	0=Carbon/Ceramic/BUNA 3=Carbon/Silcar/EPR 4=Carbon/Silcar/Viton
3	Shaft Coupling	Stainless Steel
4	Impeller/Diffuser	Engineered Composite
5	Bowl	304 Stainless Steel
6	Discharge Head	Cast Iron or Cast 304 Stainless Steel
7	Hex Shaft	Stainless Steel
8	Casing	304 Stainless Steel

### DIMENSIONS AND WEIGHTS FOR 60 HZ PUMPS

Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
7GB	9	11.88	13.88	1/2	10.5	41
	13	14.44	16.44	3/4	10.62	46
	16	16.88	18.88	1	11.25	50

### DIMENSIONS AND WEIGHTS FOR 50 HZ PUMPS



Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
7GB	10	12.60	14.60	1/2	10.5	42
	15	15.87	17.87	3/4	10.62	47
	18	18.31	20.31	1	11.25	51

### SPECIFICATIONS

- Capacities: to 10 GPM.
- Maximum Flow: 10 GPM.
- Heads: to 500 ft. (216 PSI).
- Minimum Flow: 1 GPM.
- Pipe Connections: 1" NPT Suction and Discharge.



### WARNINGS


- Pumps used on open spray applications must be plugged into electrical service which is protected by a Ground Fault Service Interrupter. Failure to do so may result in serious personal injury or death and property damage.
- Do not run pump dry.
- Do not run pump below minimum flow.
- If positive suction pressure is not available, be sure pump and suction line (with foot valve) are primed before starting pump.

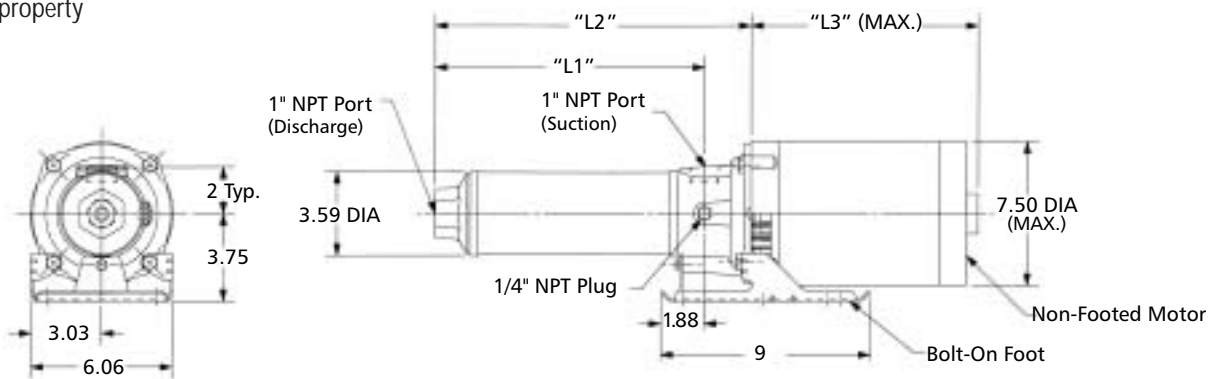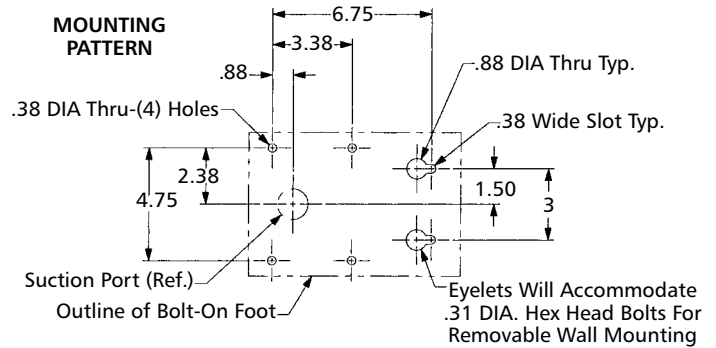

**CURVES**

## 7GB

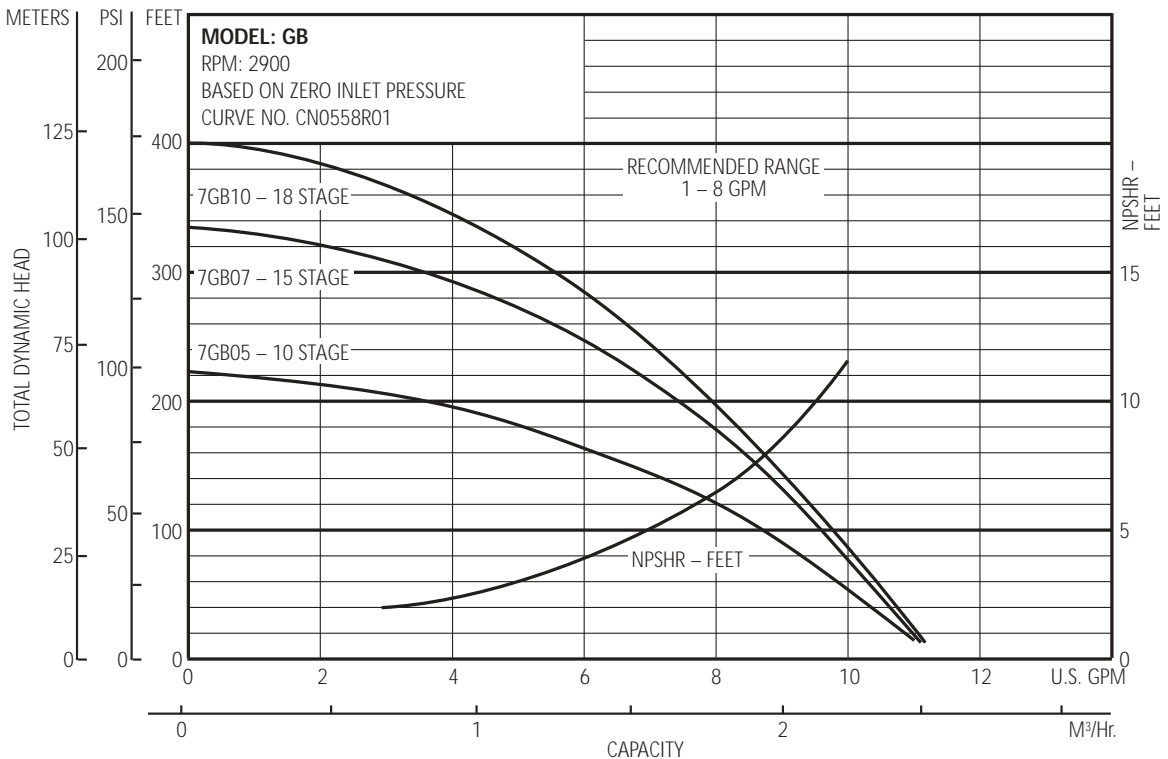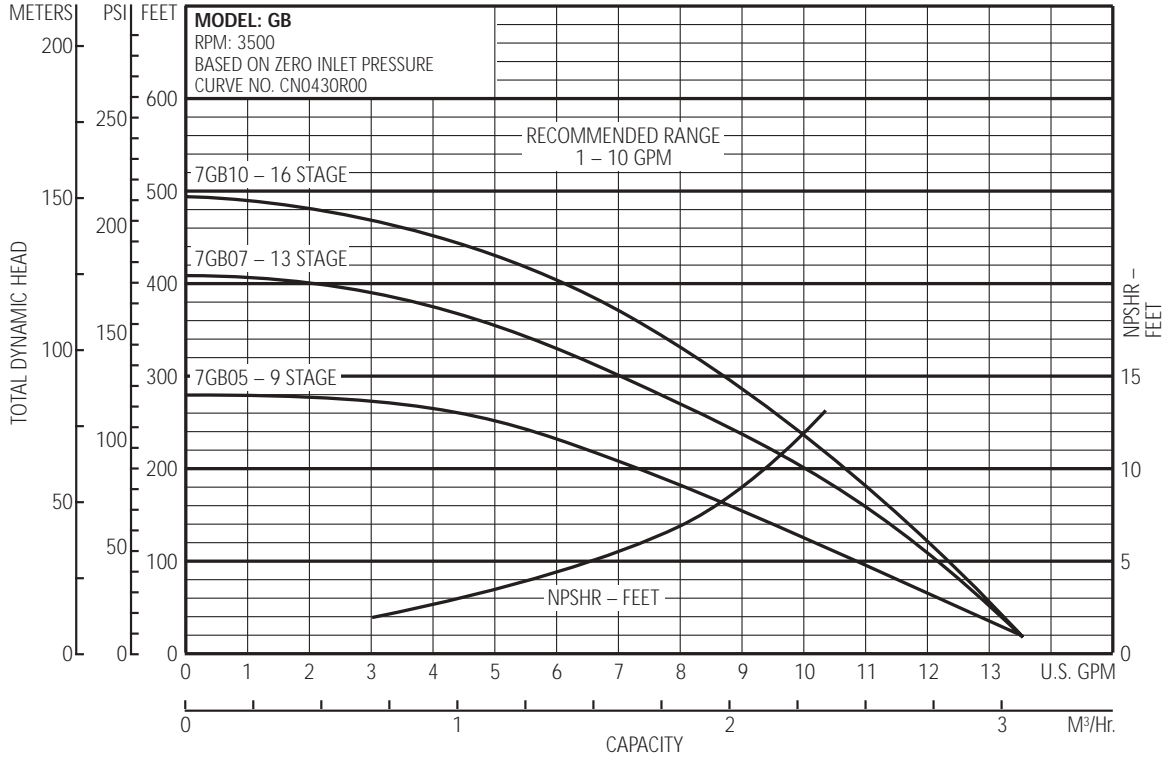

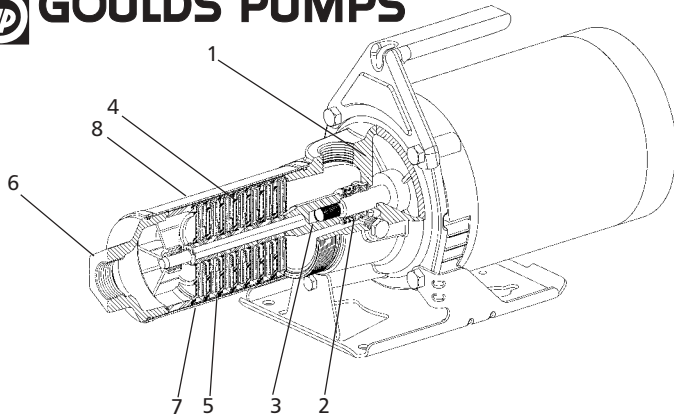

**MATERIALS OF CONSTRUCTION**

Item	Description	Material
1	Motor Adapter	Cast Iron or Cast 304 Stainless Steel
2	Mechanical Seal	0=Carbon/Ceramic/BUNA 3=Carbon/Silcar/EPR 4=Carbon/Silcar/Viton
3	Shaft Coupling	Stainless Steel
4	Impeller/Diffuser	Engineered Composite
5	Bowl	304 Stainless Steel
6	Discharge Head	Cast Iron or Cast 304 Stainless Steel
7	Hex Shaft	Stainless Steel
8	Casing	304 Stainless Steel

**DIMENSIONS AND WEIGHTS FOR 60 HZ PUMPS**

Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
10GB	8	10.94	12.94	¾	10.62	46
	10	12.31	14.31	1	11.25	50
	15	15.81	17.81	1½	11.31	47
	17	17.19	19.19	2	12.06	67

**DIMENSIONS AND WEIGHTS FOR 50 HZ PUMPS**



Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
10GB	9	11.63	13.63	¾	10.62	47
	11	13.00	15.00	1	11.25	51
	17	17.19	19.19	1½	11.31	48
	23	21.32	23.32	2	12.06	68

**SPECIFICATIONS**

- Capacities: to 16 GPM.
- Heads: to 560 ft. (242 PSI).
- Pipe Connections: 1" NPT
- Maximum Flow: 16 GPM.
- Minimum Flow: 3 GPM.
- Three phase units require separate starters.



**WARNINGS**


- Pumps used on open spray applications must be plugged into electrical service which is protected by a Ground Fault Service Interruptor. Failure to do so may result in serious personal injury or death and property damage.
- Do not run pump dry.
- Do not run pump below minimum flow.
- If positive suction pressure is not available, be sure pump and suction line (with foot valve) are primed before starting pump.

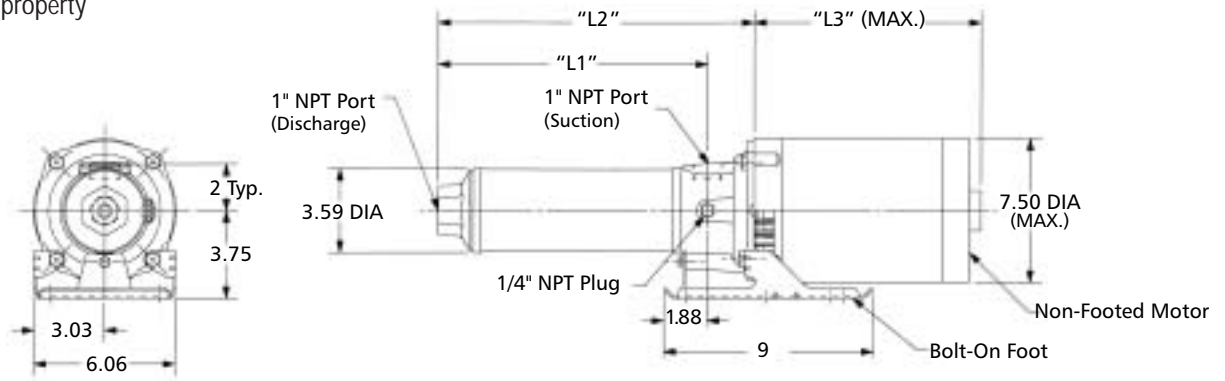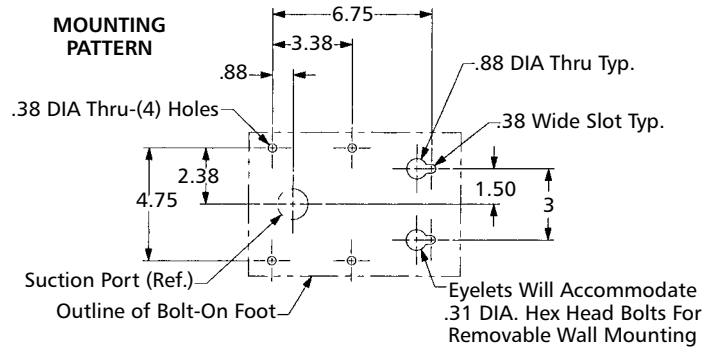

**CURVES**

**10GB**

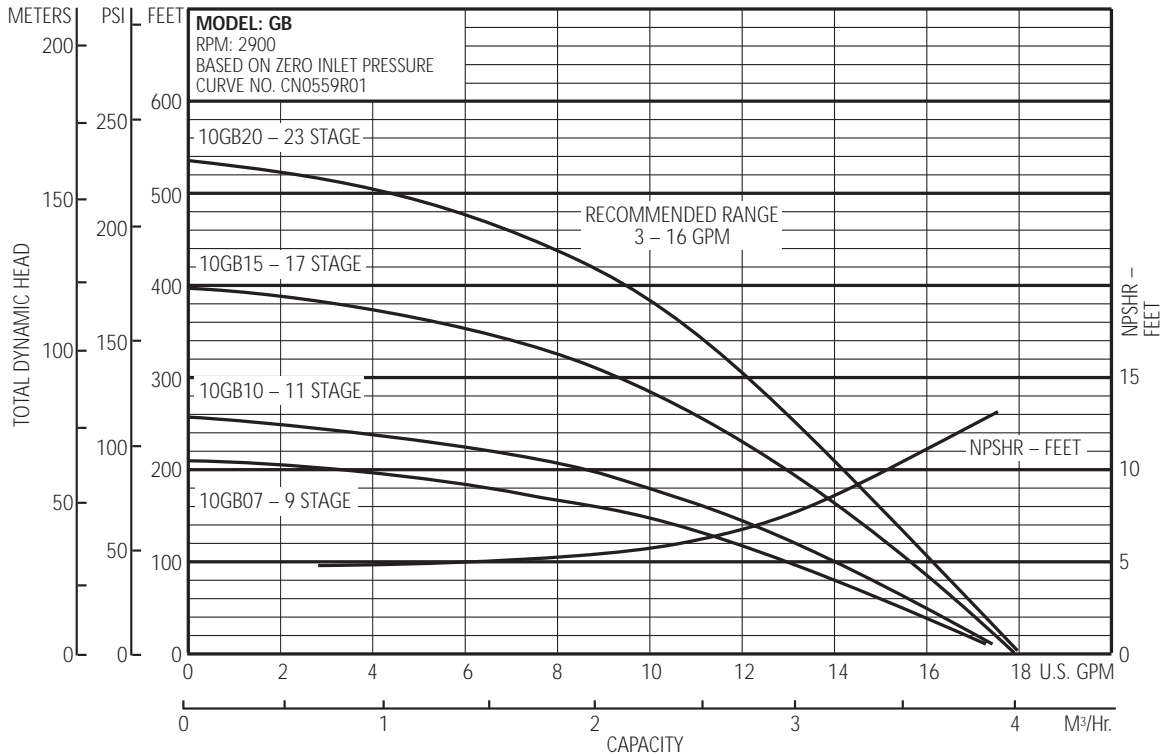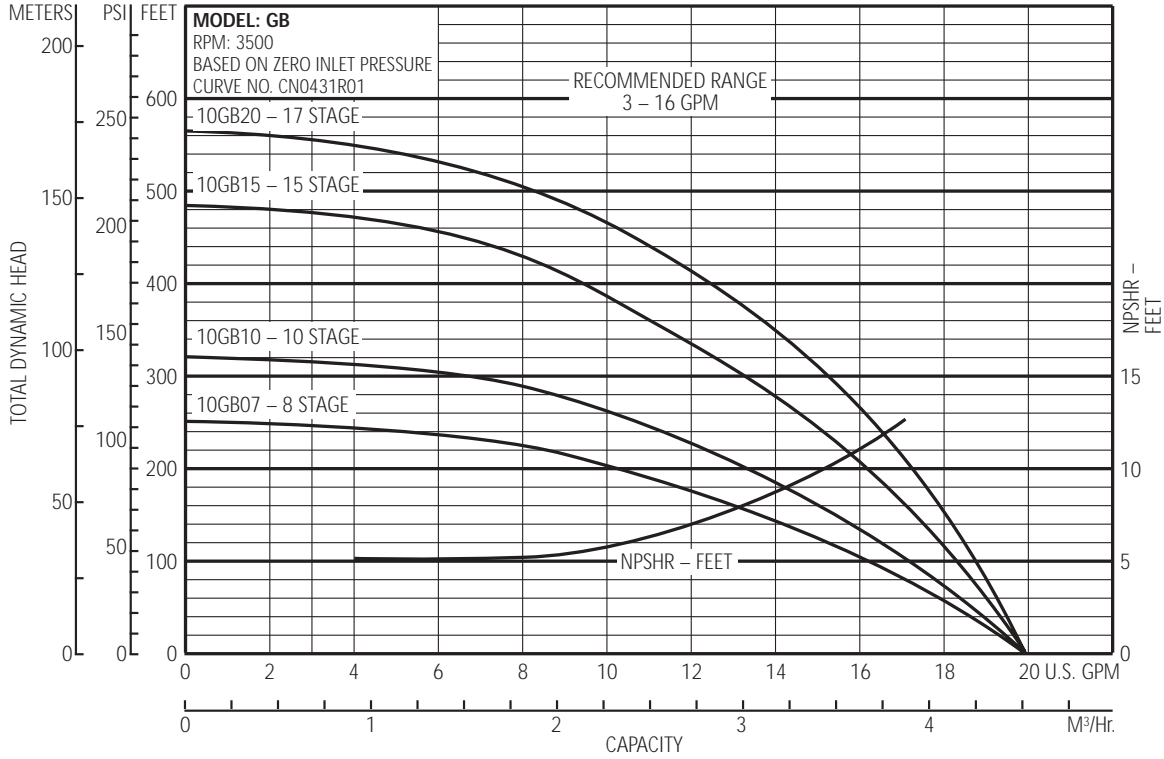

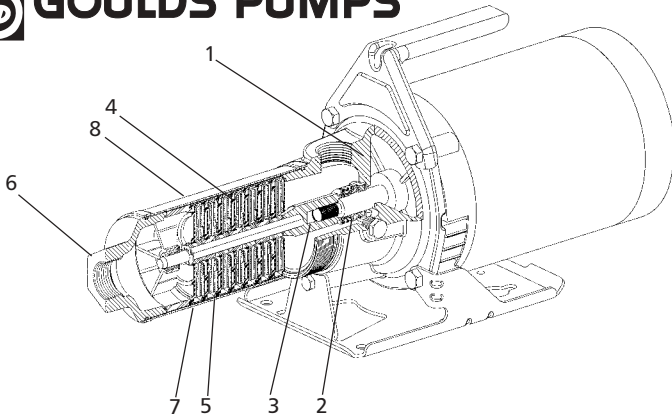

**MATERIALS OF CONSTRUCTION**

Item	Description	Material
1	Motor Adapter	Cast Iron or Cast 304 Stainless Steel
2	Mechanical Seal	0=Carbon/Ceramic/BUNA 3=Carbon/Silcar/EPR 4=Carbon/Silcar/Viton
3	Shaft Coupling	Stainless Steel
4	Impeller/Diffuser	Engineered Composite
5	Bowl	304 Stainless Steel
6	Discharge Head	Cast Iron or Cast 304 Stainless Steel
7	Hex Shaft	Stainless Steel
8	Casing	304 Stainless Steel

**DIMENSIONS AND WEIGHTS FOR 60 HZ PUMPS**

Model	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
18GB	5	9.69	11.69	¾	10.62	46
	7	11.38	13.38	1	11.25	50
	9	13.12	15.12	1½	11.31	47
	13	16.50	18.50	2	12.06	67
	15	18.25	20.25	3	13.03	69

**DIMENSIONS AND WEIGHTS FOR 50 HZ PUMPS**



Model	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
18GB	8	12.23	14.23	1	11.25	51
	12	15.68	17.68	1½	11.31	48
	16	19.06	21.06	2	12.06	68
	23	25.07	27.07	3	13.03	70

**SPECIFICATIONS**

- Capacities: to 28 GPM.
- Heads: to 470 ft. (203 PSI).
- Pipe Connections: 1" NPT
- Maximum Flow: 28 GPM.
- Minimum Flow: 6 GPM.
- Three phase units require separate starters.



**WARNINGS**

- Pumps used on open spray applications must be plugged into electrical service which is protected by a Ground Fault Service Interruptor. Failure to do so may result in serious personal injury or death and property damage.
- Do not run pump dry.
- Do not run pump below minimum flow.
- If positive suction pressure is not available, be sure pump and suction line (with foot valve) are primed before starting pump.

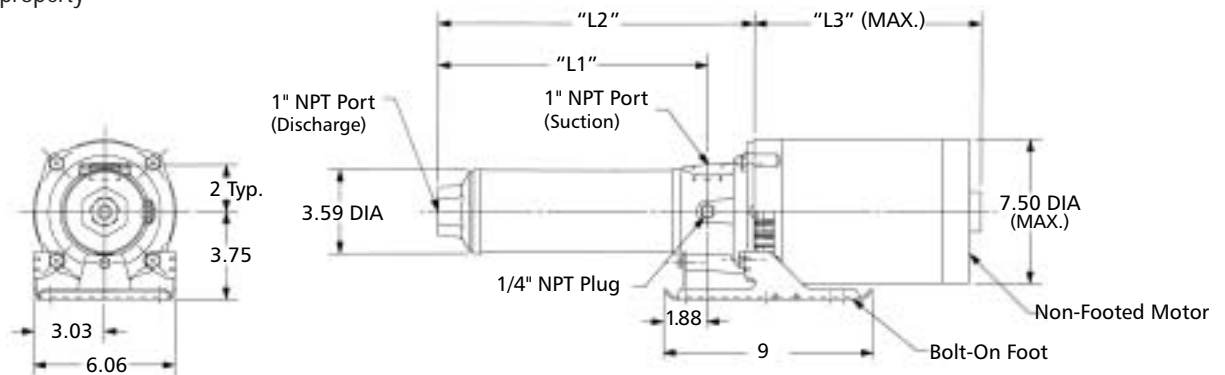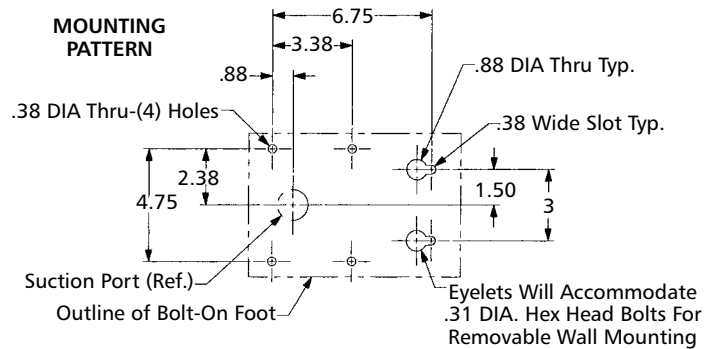

**CURVES**



## 18GB

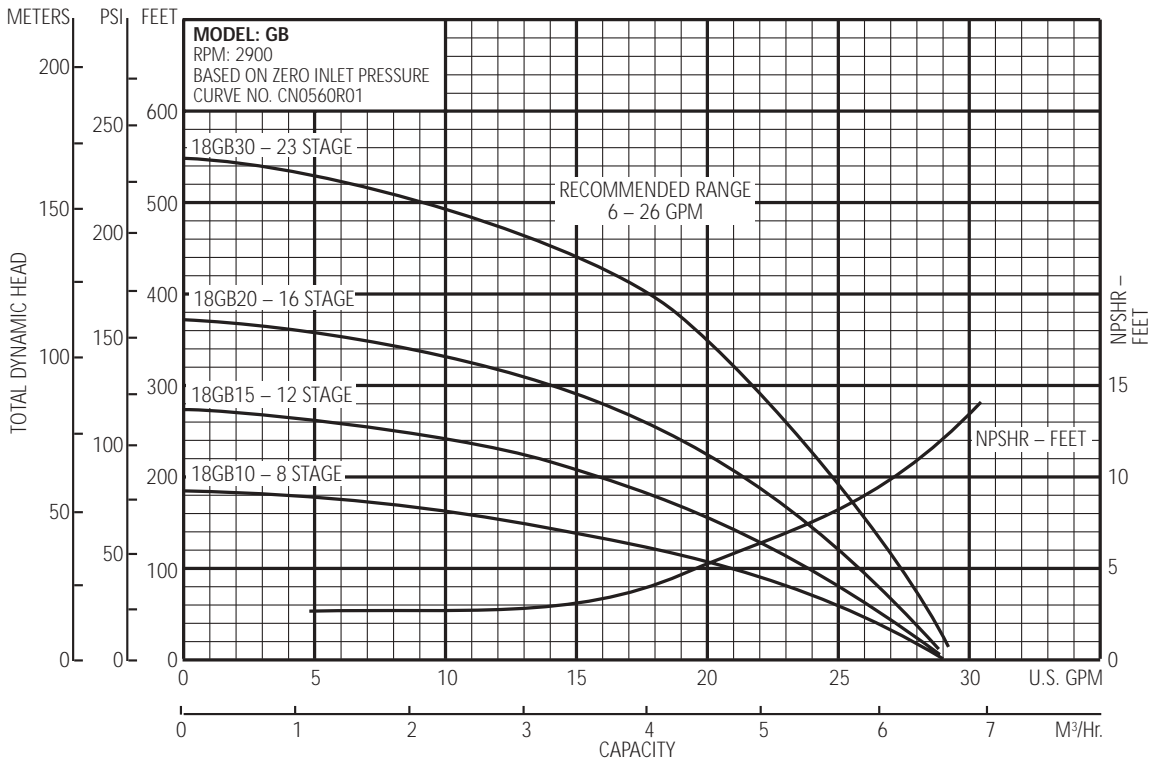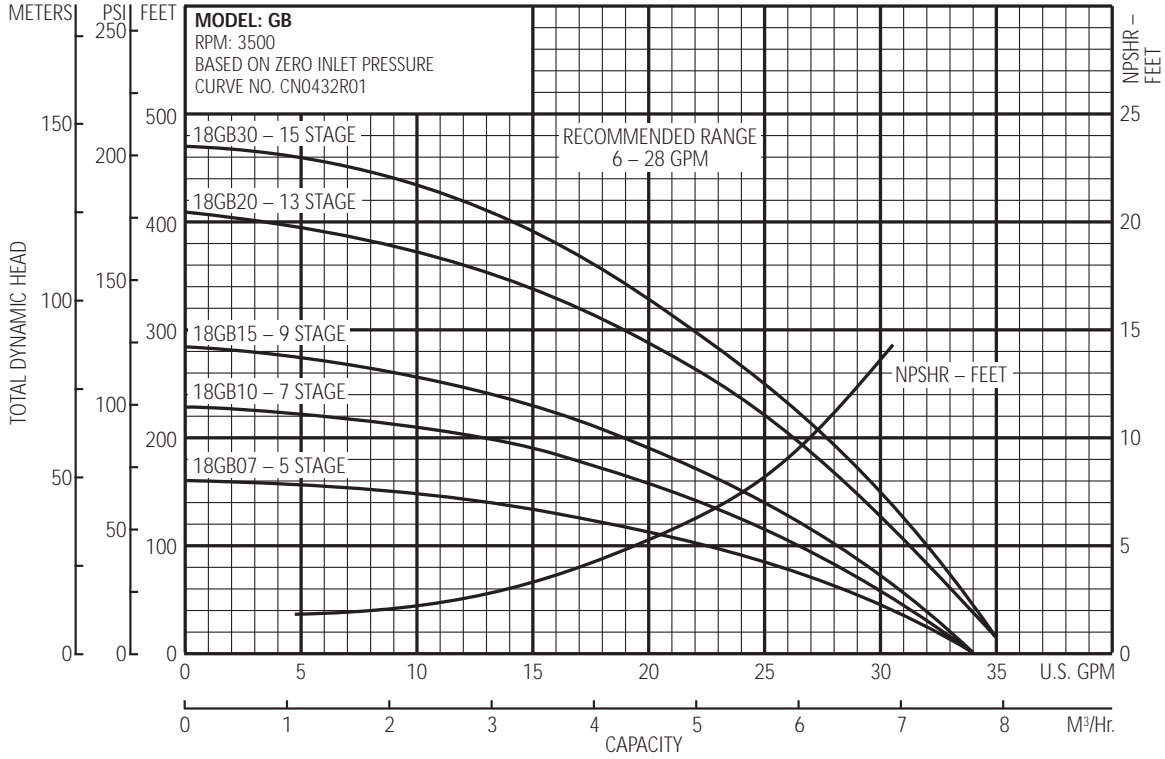




**CURVES**

## 25GB

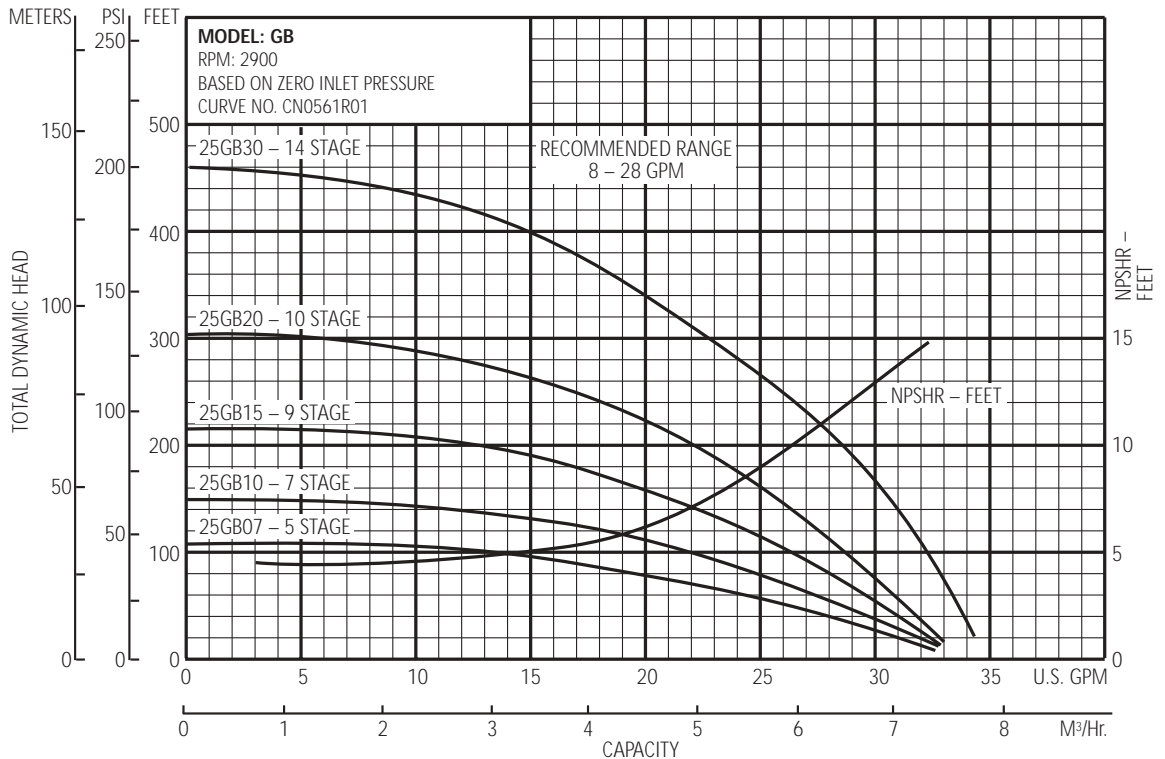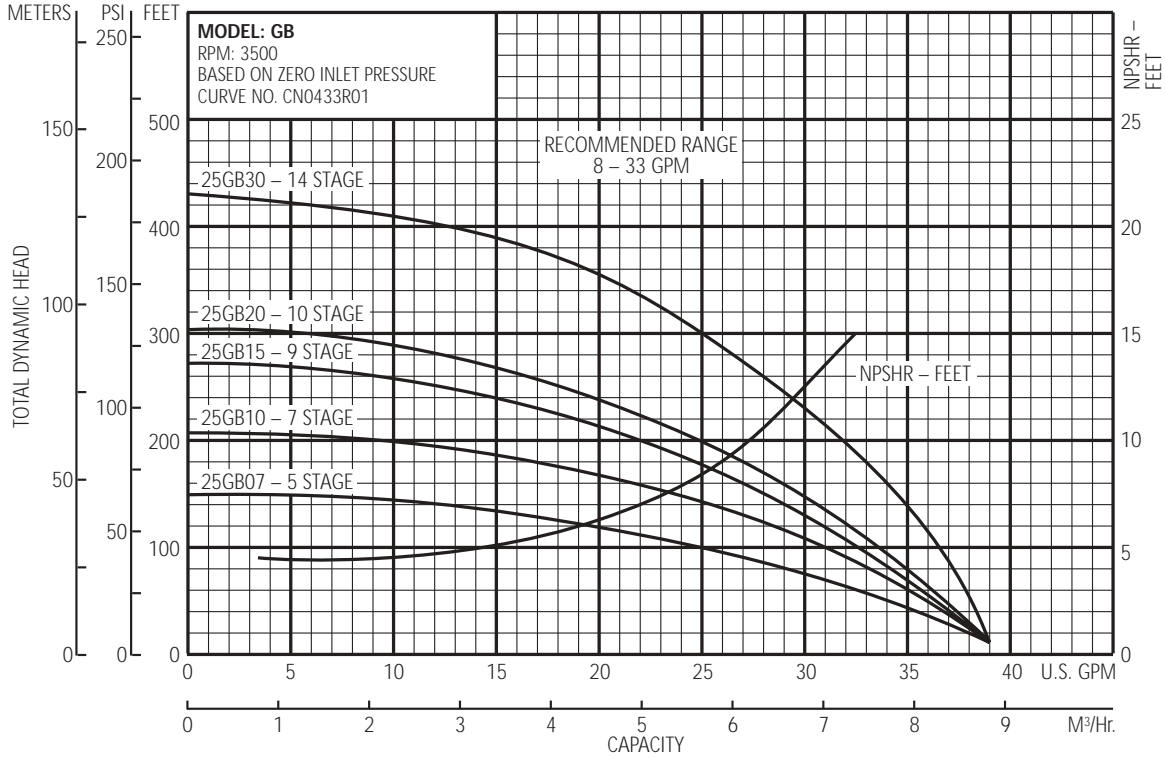

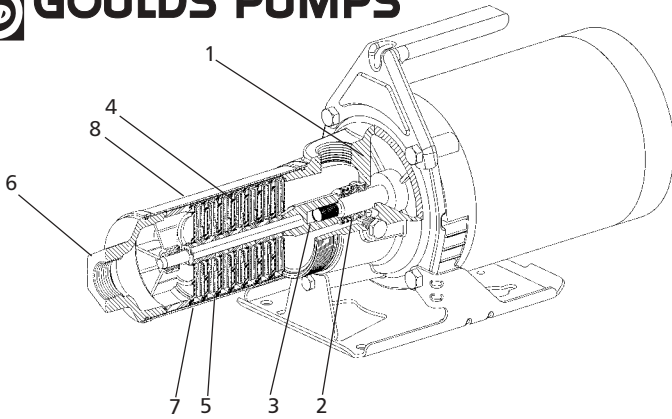

**MATERIALS OF CONSTRUCTION**

Item	Description	Material
1	Motor Adapter	Cast Iron or Cast 304 Stainless Steel
2	Mechanical Seal	0=Carbon/Ceramic/BUNA 3=Carbon/Silcar/EPR 4=Carbon/Silcar/Viton
3	Shaft Coupling	Stainless Steel
4	Impeller/Diffuser	Engineered Composite
5	Bowl	304 Stainless Steel
6	Discharge Head	Cast Iron or Cast 304 Stainless Steel
7	Hex Shaft	Stainless Steel
8	Casing	304 Stainless Steel

**DIMENSIONS AND WEIGHTS FOR 60 HZ PUMPS**

Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
33GB	5	11.77	13.77	1	11.25	51
	7	14.25	16.25	1½	11.31	55
	9	16.66	18.66	2	13.03	69
	13	21.47	23.47	3	13.03	70
	19	29.03	31.03	5	14.25	78

**DIMENSIONS AND WEIGHTS FOR 50 HZ PUMPS**



Size	Stages	L1 Approx.	L2 Approx.	HP	L3 Max.	Max. Wt. lbs.
33GB	6	13.00	15.00	1	11.25	52
	10	17.88	19.88	2	13.03	70
	14	22.69	24.69	3	13.03	71

**SPECIFICATIONS**

- Capacities: to 33 GPM.
- Heads: to 575 ft. (249 PSI).
- Pipe Connections: 1" NPT
- Maximum Flow: 33 GPM.
- Minimum Flow: 10 GPM.
- Three phase units require separate starters.



**WARNINGS**

- Pumps used on open spray applications must be plugged into electrical service which is protected by a Ground Fault Service Interruptor. Failure to do so may result in serious personal injury or death and property damage.
- Do not run pump dry.
- Do not run pump below minimum flow.
- If positive suction pressure is not available, be sure pump and suction line (with foot valve) are primed before starting pump.

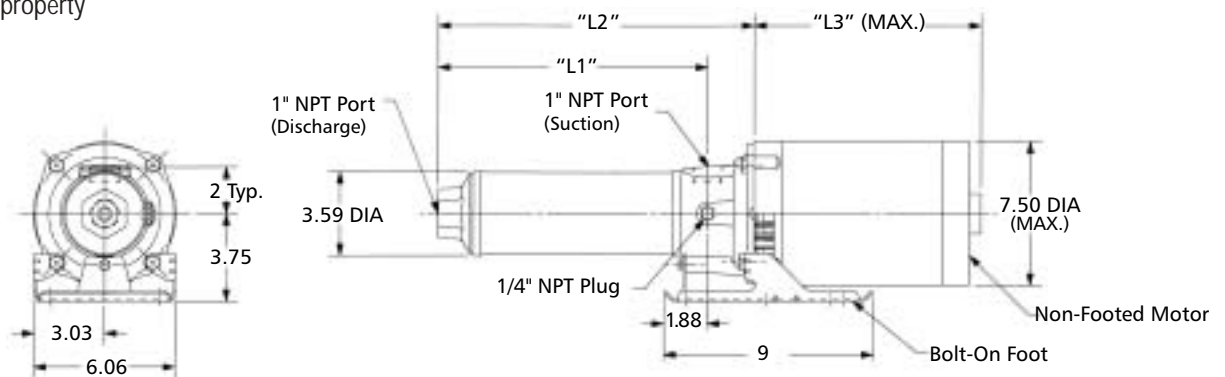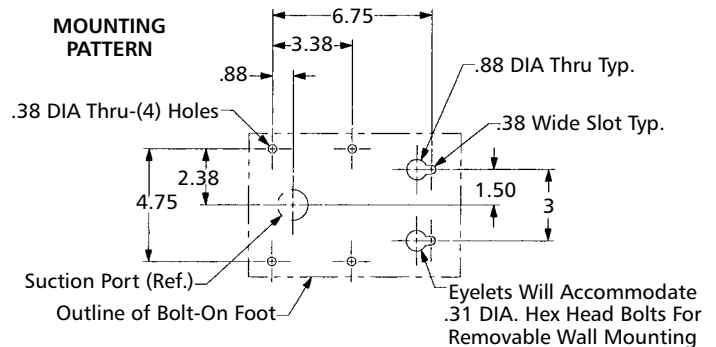

## CURVES

# 33GB

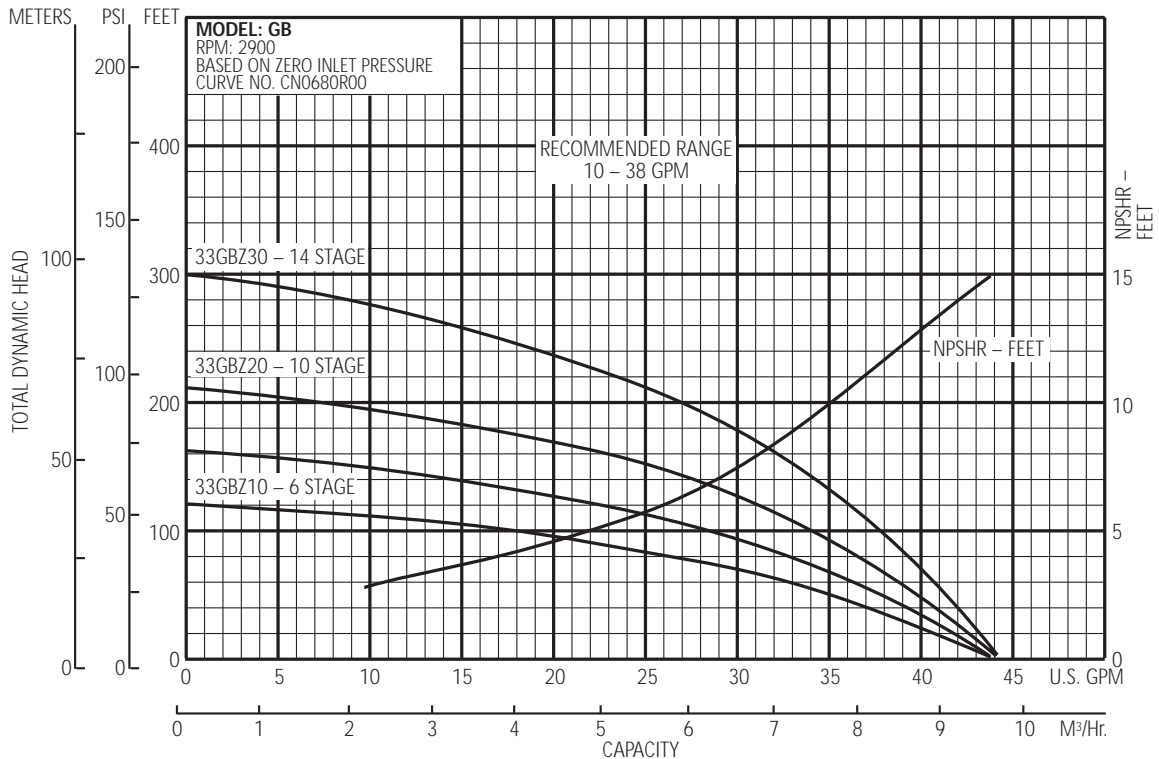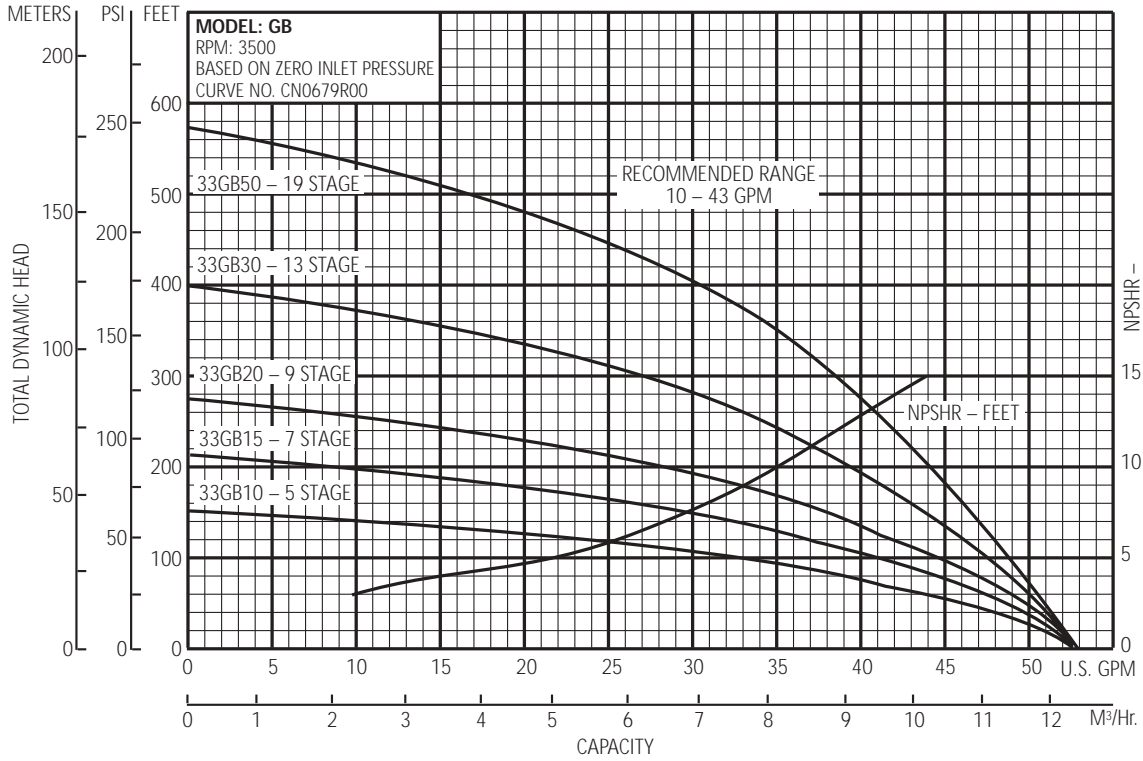

**ACCESSORIES**


---

**HOSE**


---



**AM3-5 – Discharge Hose**  
 $\frac{3}{4}$ " male x  $\frac{3}{4}$ " female, 250 PSI hose, 40 ft. section, flexible.

**AM4 – Suction Hose**  
 $\frac{3}{4}$ " female x  $\frac{3}{4}$ " female, 150 PSI hose, 4 ft. section flexible.

**HANDLE**


---



**4K452**  
 Formed carbon steel handle is standard on 7GB WaterGun® and can be ordered separately for use on other sizes.

**PRESSURE GUN**


---

**AM2**


Designed for use with WaterGun®. Nozzle passes approximately 5.7 GPM at 140 lbs. pressure and provides a most effective angle spray.

**AM2-2**

**PIPE ADAPTER**


---



**AM5-1**  
 $\frac{3}{4}$ " male HT x 1" male NPT hose to pipe adapter, stainless steel. Converts suction and discharge to  $\frac{3}{4}$ " male NPT hose.

**WAND EXTENSION**


---

**AM13-1 (32")**

Aluminum spray wand extension,  $\frac{1}{4}$ " male x  $\frac{1}{4}$ " female. (Accepts nozzle in one end; other end fits into AM2 pressure gun.)


**NOZZLE ASSORTMENT**


---



**AM7**  
 Includes one 2 GPM rated 15° nozzle, one 3 GPM rated 15° nozzle and one 3 GPM rated 0° nozzle.