



Piston Drum Pumps

➤ **NEW 5750-99 Features:**

- All Polyethylene Construction
- Delivers 25 oz. Per Stroke

➤ **Model 4840-98 Features:**

- 304 Stainless Steel Construction with Teflon® Piston / Seal
- Delivers 8 oz. Per Stroke

➤ **Model 4660-99 Features:**

- Polypropylene Construction with Viton® and Nitrile/Cork Seals and Teflon® Piston Ring
- Delivers 20 oz. Per Stroke

➤ **Model 4661-99 Features:**

- Nylon Construction with Viton® and Nitrile/Cork Seals and Teflon® Piston Ring
- Delivers 20 oz. Per Stroke

➤ **Model 4790-97 Features:**


- Bronze Construction with Neoprene Diaphragm/Flapper Valve
- Delivers 25 oz. Per Stroke

**AMT Piston Drum Pumps
are available
“Off-the-Shelf”
for same day shipment !!**

AMT Piston Drum pumps are offered in a variety of construction materials for dispensing most types of liquids and chemicals. Each model is available “Off-the-Shelf” for same day shipment.

AMT Piston Hand pumps are designed for pumping liquids compatible with pump component materials.

Model 4661-99
Nylon Construction

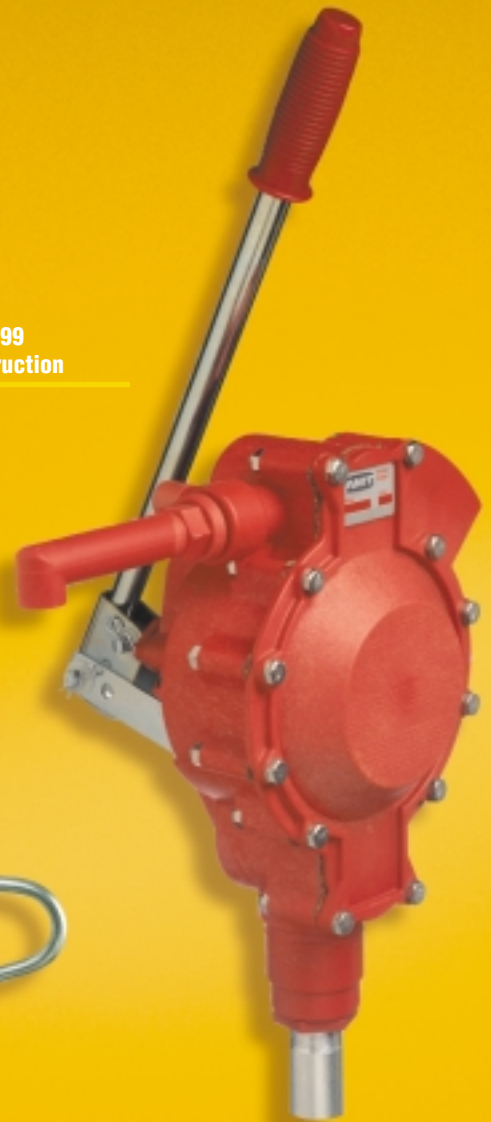

Model 4840-99
304 Stainless Steel





Model 4660-99:

- Polypropylene Construction with Stainless Steel Components
- Viton® and Nitrile/Cork Seals and Teflon® Piston Ring
- Maximum Temperature 130° F
- 22 oz. Per Stroke
- 3/4" NPT Discharge Port
- 8 Ft. x 5/8" Polyethylene Hose
- 3/4" x 40" Polypropylene Suction Tube Assembly
- 2" Polypropylene Bung Adapter
- Ship Wt. 7 Lbs.

Polypropylene Drum pump is designed for transfer and dispensing of liquids within a pH range of 4 to 11. Includes many organic acids, alcohols and water soluble inorganic chemicals which are compatible with pump component materials.*



Model 4661-99:

- Nylon Construction with Stainless Steel Components
- Viton® and Nitrile/Cork Seals and Teflon® Piston Ring
- Maximum Temperature 130° F
- 22 oz. Per Stroke
- 3/4" NPT Discharge Port
- 8 Ft. x 5/8" Nylon Hose
- 3/4" x 40" Nylon Suction Tube Assembly
- 2" Nylon Bung Adapter
- Ship Wt. 7 Lbs.

Nylon Drum pump is designed for the transfer and dispensing of liquids within a pH range of 7 to 9. Includes many oils, detergents and lubricants which are compatible with pump component materials.*



Model 4790-97:

- Bronze Construction
- Neoprene Diaphragm and Flapper Valves
- Maximum Temperature 160° F
- 26 oz. Per Stroke
- Suction & Discharge Ports Accept 1-1/2" NPT or 2" Slip-on Hose
- Self-priming (to 20 Ft. Lift)
- Ship Wt. 32 lbs.

Diaphragm Hand pump is designed for the transfer of fresh or salt water containing small stones and debris which are compatible with pump component materials.*



Model 4840-98:

- 304 Stainless Steel Construction
- Teflon® Piston and Seals
- Maximum Temperature 200° F
- 8 oz. Per Stroke
- 1/2" I.D. Suction Inlet
- 1/2" I. D. Teflon® Suction Tube
- 3/8" I.D. Discharge Outlet
- 2" Polypropylene Bung Adapter
- Self-priming (to 3 Ft. Lift)
- Ship Wt. 5 Lbs.

Stainless Steel Drum pump is designed to pump many acids, toluene, acetones and solvents which are compatible with pump component materials.*



Model 5750-99:

- Polyethylene Construction with Stainless Steel Components
- Maximum Temperature 158° F
- 25 oz. Per Stroke
- 1" NPT Discharge Port
- 2" Bung Adapter with Depth Adjustment up to 35"
- Discharge Cap to Seal Liquid From Atmosphere
- Self-priming (to 3 Ft. Lift)
- Ship Wt. 3 Lbs.

Polyethylene Drum pump handles many harsh liquids including many alkalies, chemicals, acids and solvents which are compatible with pump component materials.*

AMT Drum pumps are capable of handling compatible liquids with a maximum 5000 SSU viscosity @ minimum 60° F liquid temperature (Equivalent to SAE 40 motor oil). Warranty is void when used beyond compatibility and temperature shown for each product.



400 Spring Street
Royersford, PA 19468
(610) 948-3800 Fax (610) 948-5300
E-mail: amt@fast.net
www.amtpump.com

(* Always refer to a chemical resistance chart to confirm compatibility)

128 Oz. = 1 Gallon