



Industrial/Commercial Sump Pumps

- **Stainless Steel, Bronze and Cast Iron Construction**
- **Stainless Steel Floats**
- **Carbon or Bronze Bearings**
- **Stainless Steel Shafts**
- **27" - 44" Column Height**
- **1-1/4", 1-1/2" and 2" NPT Discharge**
- **Maximum Temperature 200° F**
- **Maximum Head 30 Ft.**
- **Maximum Flow 103 GPM**
- **Semi-open, Clog Resistant Impellers**
- **Available with Open Drip Proof (ODP) and Totally Enclosed Fan Cooled (TEFC) Motors**
- **1/3, 1/2 and 3/4 HP 115VAC, Single Phase Motors**




The AMT line of Industrial/Commercial Sump pumps is designed for heavy duty commercial applications, as well as residential use where a combination of durability and high performance is required. AMT Sump pumps are available in Stainless Steel, Bronze and Cast Iron constructions with ODP or TEFC motors in 1/3 through 3/4 HP for proper pump selection in most applications. All models include stainless steel shaft, screen and float. All motors are fitted with automatic switch and a 10 foot 16/3 115VAC line cord. Pumps require minimum sump pit of 18" diameter and 24" depth. SSPMA certified. UL Listed (E85176)

AMT Industrial/Commercial Sump pumps are reliable, cost effective and low maintenance. Many are readily available "Off-the-Shelf" for fast same day shipment. For use with nonflammable liquids which are compatible with pump component materials.



Stainless Steel
TEFC Model Sump Pump

Performance of Industrial/Commercial Sump Pumps


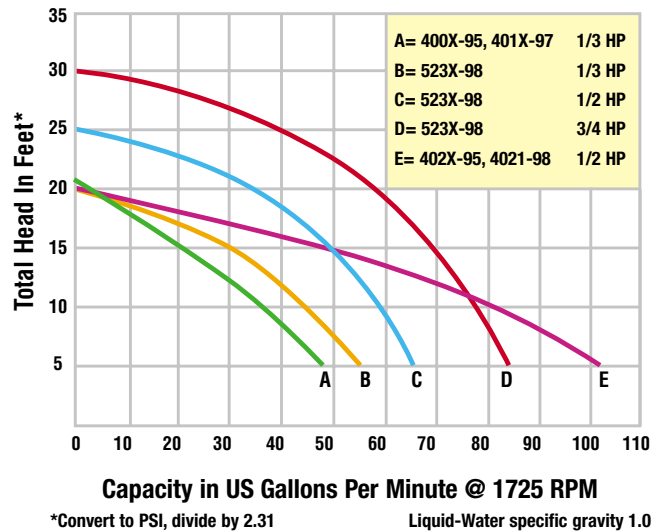


Industrial/Commercial Sump Pumps

| Model # | HP | PH | Motor Type | Voltage @ 60 Hz | Full Load Amps | Construction Material | Bearing | A* (NPT) | B | C | D | E | F | G | H | J | CH | Ship Wt. |
|----------|-----|----|------------|-----------------|----------------|-----------------------|---------|----------|------|-----|-----|-----|-----|----|-----|-----|----|----------|
| 5230-98 | 1/3 | 1 | ODP | 115/230 | 8/4 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 6.4 | 4.4 | 39 | 3.1 | 4.6 | 29 | 28 Lbs. |
| 5231-98 | 1/3 | 1 | ODP | 115/230 | 8/4 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 6.4 | 4.4 | 51 | 3.1 | 4.6 | 41 | 30 Lbs. |
| 5233-98 | 1/2 | 1 | ODP | 115/230 | 10/5 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 6.4 | 4.4 | 40 | 3.1 | 4.6 | 29 | 31 Lbs. |
| 5234-98 | 1/2 | 1 | ODP | 115/230 | 10/5 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 6.4 | 4.4 | 52 | 3.1 | 4.6 | 41 | 33 Lbs. |
| 5236-98 | 3/4 | 1 | ODP | 115/230 | 13/7 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 6.4 | 4.4 | 40 | 3.1 | 4.6 | 29 | 34 Lbs. |
| 5237-98 | 3/4 | 1 | ODP | 115/230 | 13/7 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 6.4 | 4.4 | 52 | 3.1 | 4.6 | 41 | 36 Lbs. |
| 5239-98 | 1/3 | 1 | TEFC | 115/230 | 7/4 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 7.0 | 5.0 | 39 | 3.1 | 4.6 | 29 | 36 Lbs. |
| 523A-98 | 1/3 | 1 | TEFC | 115/230 | 7/4 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 7.0 | 5.0 | 50 | 3.1 | 4.6 | 41 | 38 Lbs. |
| 523C-98 | 1/2 | 1 | TEFC | 115/230 | 9/5 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 7.0 | 5.0 | 38 | 3.1 | 4.6 | 29 | 39 Lbs. |
| 523D-98 | 1/2 | 1 | TEFC | 115/230 | 9/5 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 7.0 | 5.0 | 50 | 3.1 | 4.6 | 41 | 41 Lbs. |
| 523F-98 | 3/4 | 1 | TEFC | 115/230 | 9/5 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 7.0 | 5.0 | 39 | 3.1 | 4.6 | 29 | 40 Lbs. |
| 523G-98 | 3/4 | 1 | TEFC | 115/230 | 9/5 | Stainless Steel | Carbon | 1.50 | 10.8 | 4.2 | 6.6 | 7.0 | 5.0 | 51 | 3.1 | 4.6 | 41 | 42 Lbs. |
| 4000-95 | 1/3 | 1 | TEFC | 115/230 | 7/4 | Cast Iron | Bronze | 1.25 | 10.0 | 4.1 | 5.9 | 7.8 | 2.6 | 35 | 3.0 | 4.7 | 27 | 39 Lbs. |
| 4001-95 | 1/3 | 1 | TEFC | 115/230 | 7/4 | Cast Iron | Bronze | 1.25 | 10.0 | 4.1 | 5.9 | 7.8 | 2.6 | 47 | 3.0 | 4.7 | 39 | 47 Lbs. |
| 4010-97 | 1/3 | 1 | TEFC | 115/230 | 7/4 | Bronze | Bronze | 1.25 | 10.0 | 4.1 | 5.9 | 7.8 | 2.6 | 35 | 3.0 | 4.7 | 27 | 40 Lbs. |
| 4011-97 | 1/3 | 1 | TEFC | 115/230 | 7/4 | Bronze | Bronze | 1.25 | 10.0 | 4.1 | 5.9 | 7.8 | 2.6 | 47 | 3.0 | 4.7 | 39 | 49 Lbs. |
| 4020-95+ | 1/2 | 1 | TEFC | 115/230 | 9/5 | Cast Iron | Bronze | 2.00 | 12.1 | 4.6 | 7.4 | 7.3 | 6.2 | 41 | 5.6 | 5.5 | 32 | 50 Lbs. |
| 4022-95+ | 1/2 | 1 | TEFC | 115/230 | 9/5 | Cast Iron | Bronze | 2.00 | 12.1 | 4.6 | 7.4 | 7.3 | 6.2 | 53 | 5.6 | 5.5 | 44 | 55 Lbs. |
| 4021-98+ | 1/2 | 1 | TEFC | 115/230 | 9/5 | Stainless Steel | Carbon | 2.00 | 12.1 | 4.6 | 7.4 | 7.3 | 6.2 | 41 | 5.6 | 5.5 | 32 | 49 Lbs. |

*NPT: National Pipe Thread + Handles Solids up to 3/4"

(*) Standard NPT (female) pipe thread.
 (**) This dimension may vary due to motor manufacturer's specifications.
NOTE: Dimensions have a tolerance of $\pm 1/8"$.
NOTE: Electric supply for ALL motors must be within $\pm 10\%$ of nameplate voltage rating (Ex. 230V $\pm 10\%$ = 207 to 253)

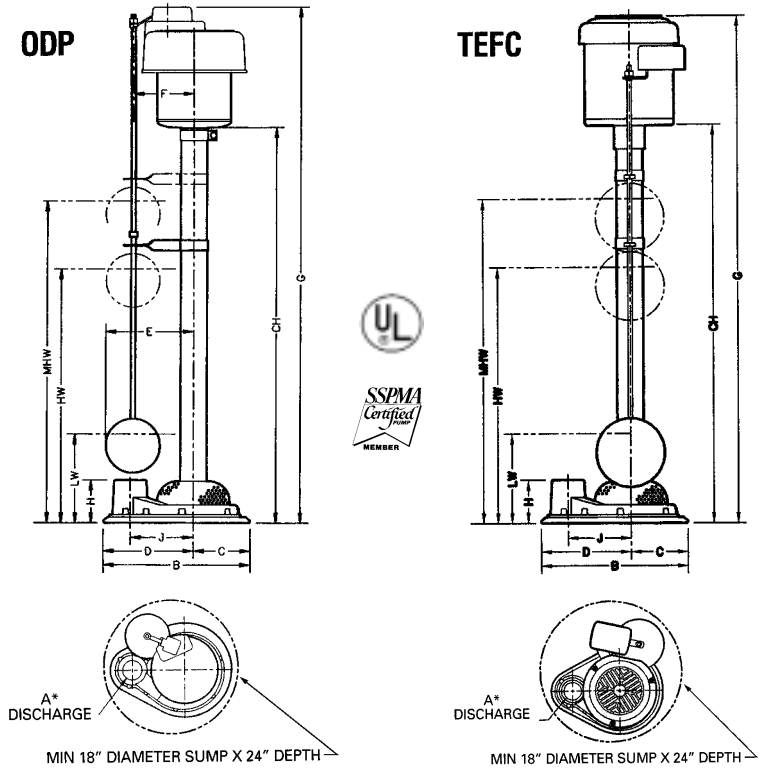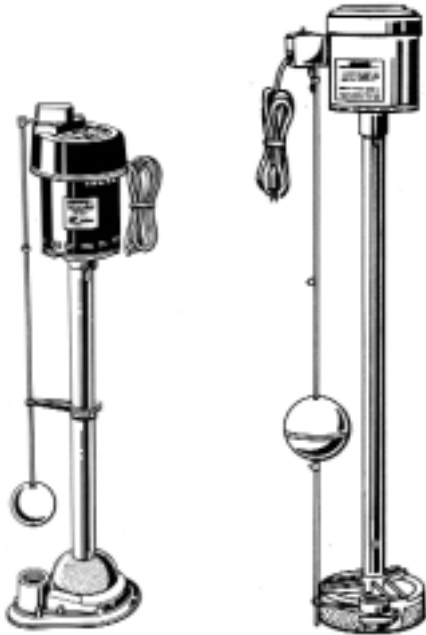

Standard Features

- Stainless Steel Screen and Float
- Semi-open, Clog Resistant Impellers
- 1/3, 1/2 or 3/4 HP ODP and TEFC 115V Single Phase Motors
- 10' 16/3 115V AC Line Cord
- Maximum Head 30 Ft.
- Maximum Flow 103 GPM
- ODP Motors Feature a Drip Cover
- Stainless Steel Shaft
- Bronze or Carbon Bearings
- 27" to 44" Column Height
- Maximum Temperature 200° F
- Solids Handling Design up to 3/4" Diameter (25% of Solids)



400 Spring Street
 Royersford, PA 19468
 (610) 948-3800 Fax (610) 948-5300
 E-mail: amt@fast.net
 www.amtpump.com

AMT reserves the right to discontinue any model or change specifications at any time without incurring any obligation.

523X-CP / 0901