





Model GH-3400

Description Hand pump for use with 1/2" to 1 1/4" hose. Available with either horizontal or vertical handle. This pump has no mounting feet.



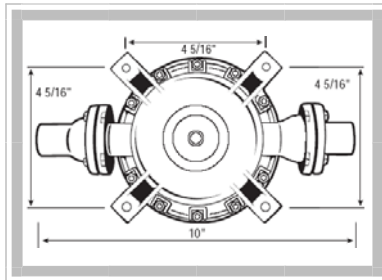


- Features**
- Rugged, epoxy-coated, black all-aluminum body
 - Stainless steel actuation
 - Can be installed below deck using a thru-deck mounting kit
 - Various end connections available






Performance		
Flow Rate	per Stroke	per Minute (@ 90 cycles/min)
	0.44 Qt 0.42 L	10 Gals 37.9 L
Max Pressure	20 psi	1.4 kg/cm ²
Max Head	12 ft	3.7 m
Max Lift	12 ft	3.7 m

Available Materials	
Pump Body	Epoxy-coated Aluminum (Black)
Clamp Ring	Epoxy-coated Aluminum (Black)
Diaphragm	Buna Nitrile (Buna N), Buna N Double Sided, Buna-N 3-Ply, Neoprene, Viton, EPDM, Urethane, Silicone
Valves	Buna N, Neoprene, Viton, EPDM, Silicone (<i>Silicone only available with umbrella valve</i>)

Dimensions						
	Length			Width	Height	
	Body	incl. H. Handle	incl. V. Handle		incl. H. Handle Up	incl. V. Handle Up
in	10 1/4	12 5/8	13	5 13/16	11 3/4	13 1/2
cm	26.04	32.07	33.02	14.76	29.85	34.29
Mounting Holes			4			
Mounting Hole Diameter			1/4 in	0.64 cm	Weight	
Bolt Circle Diameter			6 1/8 in	15.56 cm	2.90 lb	1.31 kg
Hole-to-Hole Distance			4 5/16 in	10.95 cm		

Inlet & Outlet Ends & Sizes						
						
in	cm	Hose (Smooth)	N.P.T. Female (Tapped Inside)	N.P.T. Male (Threaded Outside)	Male (Threaded Outside) Garden Hose	Barbed
1/2	1.27		•			
3/4	1.91		•	•		
1	2.54	S		•		
1 1/4	3.18	•				

(S: standard •: optional)

Other Options		
Item	Standard	Optional
Valves	 Flapper	 Duckbill  Umbrella
Handle Style	Horizontal	Vertical (removable)
Other		Thru Deck Mounting Kit (<i>only for vertical handle</i>) Internal Spring

Consult factory for other options.