



Centrifugals - In-Line

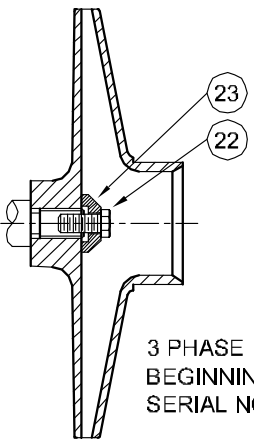

3 PHASE
BEGINNING WITH
SERIAL NO. 950789

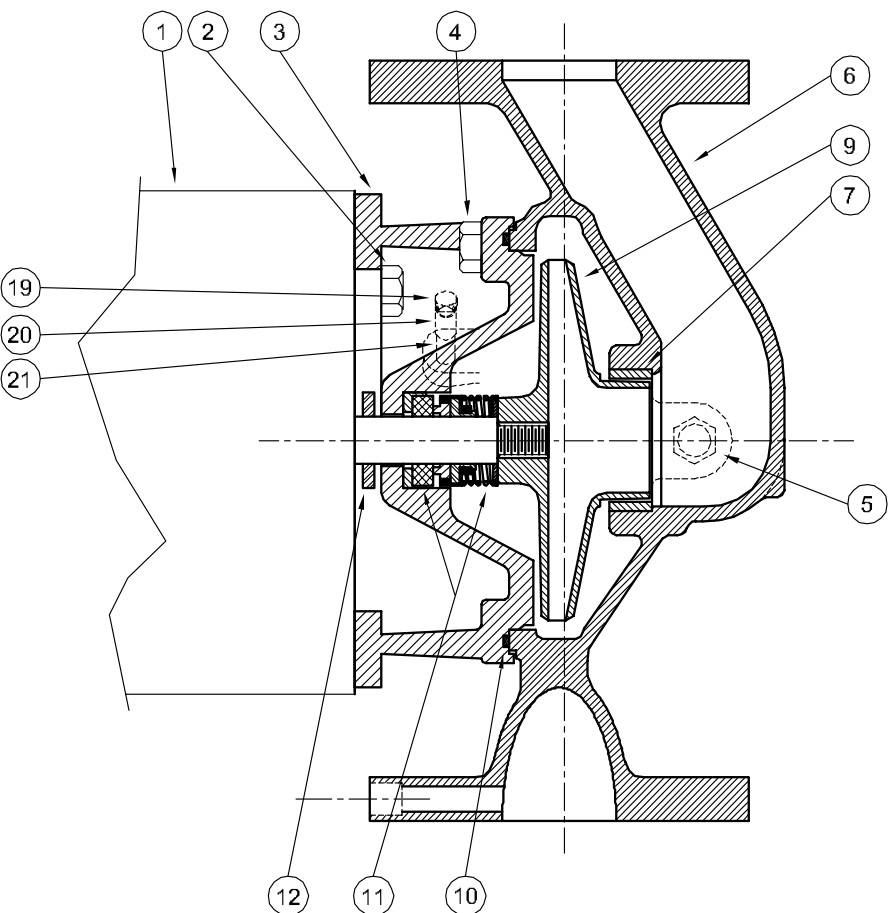

| 1 - MOTORS (All 56J Frame) | | |
|----------------------------|-------------|-----|
| RPM & PHASE | PART NUMBER | HP |
| OPEN DRIP PROOF | | |
| Single Phase (ODP) | 09581 | 1/3 |
| | 09582 | 1/2 |
| | 09625 | 3/4 |
| | 09650 | 1 |
| | 09675 | 1½ |
| Three Phase (ODP) | 09661 | 1/3 |
| | 09662 | 1/2 |
| | 09652 | 3/4 |
| | 09653 | 1 |
| | 09676 | 1½ |
| | 09678 | 2 |

| SYMBOL NUMBER | PART NUMBER | QTY | DESCRIPTION |
|---|-------------|-----|--------------------------|
| 12 | 08105 | 1 | Slinger Washer |
| 19 | 00158 | 1 | Pipe Plug 1/8" |
| 20 | 02395 | 1 | Pipe Coupling 1/8" |
| 21 | 02394 | 1 | Pipe Nipple 1/8" |
| 22 | 21182 | 1 | Screw - 1/4-28 x 1/2" Lg |
| 23 | 21181-C | 1 | Washer |
| DIFFERING PARTS FOR ALL BRONZE CONSTRUCTION | | | |
| 2 | 03122-A | 4 | Cap Screw |
| 3 | 09630-D | 1 | Adapter |
| 4 | 03288 | 4 | Cap Screw |
| 5 | 04236 | 1 | Plug |
| * 6 | 09882-A | 1 | Casing Assy. 9882-A |
| 19 | 01691-A | 1 | Plug |
| 20 | 21925 | 1 | Pipe Coupling |
| 21 | 21926 | 1 | Pipe Nipple |

(*) Casing Assy. Include Symbol 7.

(**) For hot water or Caustic service.

(+) Series GB pumps have been manufactured with either a flat or O-ring type gasket. Determine which type is required before ordering. When in doubt, order flat gasket.

| SYMBOL NUMBER | PART NUMBER | QTY | DESCRIPTION |
|---------------|-------------|-----|--------------------------------|
| 2 | 03122 | 4 | Cap Screw - 3/8" x 3/4" |
| 3 | 09630-C | 1 | Adapter |
| 4 | 04235 | 4 | Cap Screw - 3/8" x 1 1/4 |
| 5 | 04236-D | 1 | Pipe Plug 1/4" |
| * 6 | 09882 | 1 | Casing Assy |
| 7 | 09632-D | 1 | Wear Ring |
| 9 | 09680-3.25 | 1 | Impeller - 3GB5-1-1/2F |
| | 09680-3.63 | 1 | Impeller - 5GB5-1-1/2F |
| | 09680-4.00 | 1 | Impeller - 7GB5-1-1/2F |
| | 09680-4.25 | 1 | Impeller - 10GB5-1-1/2F |
| | 09680-4.75 | 1 | Impeller - 15GB5-1-1/2F |
| + 10 | 09680-4.97 | 1 | Impeller - 20GB5-1-1/2F |
| | 09634 | 1 | Flat Gasket + |
| | 21333 | 1 | O-Ring Gasket - Buna-N |
| | 21546 | 1 | O-Ring Gasket - Viton |
| | 22132 | 1 | O-Ring Gasket - EPT** |
| 11 | 22058 | 1 | O-Ring Gasket - Teflon |
| | 08514 | 1 | Mechanical Seal - Buna-N (Std) |
| | 09762 | 1 | Mechanical Seal - Viton |
| | 20764-C | 1 | Mechanical Seal - EPT** |

NOTE: Beginning with Serial No. 950789, all pumps with three-phase motors are equipped with an impeller lock screw and washer as illustrated. All other methods of securing the impeller to the shaft have been discontinued.

If it is necessary to disconnect three phase motor leads while new replacement impeller is installed on any pump prior to serial No. 950789, leads should be tagged to insure correct motor rotation and prevent impeller spin-off.