



MODEL 120A

AIR POWERED DIAPHRAGM PUMP

2" PORTS - 0 TO 40 GPM



120ACB-200



120AWA-200

All models are available in heavy duty bronze or lightweight aluminum

- SAFE TO RUN WHEN DRY
- VOLUMES TO 38 GPM
- POWERFUL VACUUM LIFTS
- DRY START LIFT TO 1
- PUMP UP TO 50% SOLIDS
- LOW EMULSIVE & SHEER ACTION
- NON-CLOGGING FLOW-THRU DESIGN
- EASY TO SET-UP, USE, CLEAN, AND MAINTAIN
- PERMANENT AND PORTABLE APPLICATIONS
- BUILT TOUGH FOR YEARS OF SERVICE
- LONG LIFE, REINFORCED PUMP DIAPHRAGMS
- ALL MATERIALS SPECIFIED FOR THE MARINE ENVIRONMENT

Performance:	
Static Suction Lift	15 ft (4.57m)
Dry Suction Lift	12 ft (3.65m)
Discharge Head / Continuous Duty	15 ft (4.57m) / 10 ft (3m)
Max Volume	40 GPM / 152 LPM*
	*at 60 cycles per minute
Construction:	
Pump Base	Choice of:
(Wetted Parts)	Anodized Aluminum
	Marine Bronze
	Urethane Powder Coating
	PTFE Coating (HALAR)
Diaphragms and Valves	Choice of:
	Nitrile
	Viton®
	Hypalon®
Mounting Frame	Powder Coated Aluminum
Hardware Material	Stainless Steel
Drives:	
Air Motor	3" bore x 3" stroke, self-lubricating, air cylinder, controlled by an adjustable 0-30 sec. ceramic air operated timing valve.
Air Consumption	15 ACFM*
	* at 60 cycles/min at 85 PSI

APPLICATIONS

Edson Air Powered Diaphragm Pumps are the most versatile of all Edson Pumps due to the flexibility of the air cylinder drive. They are used for the collection and transfer of waste liquids and pumping liquids with suspended solids. They are capable of handling liquids with large suspended solids without clogging, to prime from dry starts, and to run dry. They have the added feature of low emulsive, non-sheering pumping action. These basic performance features, and Edson's 140 year history of manufacturing quality products, have made our pumps the choice of cleaning up our environment and controlling the disposal of liquid waste. Edson Pumps can be applied to a very broad range of applications, including the requirements for ground water remediation, containment transfers, dewatering, oil & water separations, marina & campground sewage collection, tank, sump & drum transfers, filtration applications, and the collection & transfer of abrasives & slurries.

INDUSTRIAL

- Sump Pump-Outs
- Slurry Transfer
- Abrasive Pumping
- Filtration Pumping
- Drum Transfer
- Groundwater Containment
- Spill Cleanup
- Drain Dewatering

MARINE

- Pump-Out Stations
- On-Board Waste
- Bilge Pumps
- Light Dredging
- Emergency Dewatering
- Boatyard Utility Pump
- Oil Spill Cleanup

ENVIRONMENTAL

- Groundwater Remediation
- Tank Pump-Outs
- Grease & Oil Collections
- Skimming Pumping
- Asbestos Clean-Ups
- Oil-Water Separation
- Oil Spill Clean-Up

MUNICIPAL & UTILITY

- Sewage Collection & Transfer
- Waste Water Skimming
- Drain Clean-Out
- Utility Trunk Pump
- Fly Ash Clean-Ups
- Containment Transfer
- Meter Pit Dewatering
- Manhole Dewatering



GENERAL DESCRIPTION

Edson Air Powered Diaphragm Pumps are ideal for collection and transfer of liquid waste, dewatering, slurry, and filter applications. An externally mounted reciprocating air cylinder powers the single diaphragm at low air consumption rates. Open flow-through flapper valves and accurate, variable speed ceramic solenoid control make these pumps ideal for applications involving liquids with abrasive solids and high viscosities. Portable models are used for field applications with portable compressors.

Order Nos. 120ACA-200 and 120ACB-200 are the Edson air powered, base mounted, nominal 40 gallon per minute, 2" NPT diaphragm pumps. The 120ACA is built with the wetted parts made of anodized aluminum and the 120ACB wetted parts are marine bronze. **Order Nos. 12AWA-200 and 12AWB-200** are the cart mounted version with wheels and handle for portability. The standard models are supplied with a self lubricating reciprocating air cylinder with 3" bore x 3" stroke and adjustable 0-30 second ceramic air operated solenoid. With this combination these pumps will operate at cycles between 0 and 60 per minute and perform as detailed in the performance charts on below.

The pumps can also be ordered with options for pumping materials that require different chemical resistant properties. These options included the wetted surfaces coated with either baked on polyurethane or Hylar. Edson also offers optional diaphragms and valves made of Viton® and Hypalon®.

Call Edson Customer Service for more details.

VOLUME PERFORMANCE CHARTS

56 Cycles Per Min.		DISCHARGE HEIGHT			S U C C U M E R I C I A L P U M P
		0	5 ft 1.5 m	10 ft 3 m	
S U C C U M E R I C I A L P U M P	1 ft .3 m	38/144	32/121	24/91	T H I S P U M P I S D E S I G N E D F O R H I G H P R E S S U R E A P P L I C A T I O N S
	5 ft 1.5 m	30/114	30/114	23/87	
	10 ft 3 m	28/106	26/98	16/61	
	12 ft 3.7 m	28/106	26/98	14/53	

gpm / lpm

40 Cycles Per Min.		DISCHARGE HEIGHT			S U C C U M E R I C I A L P U M P
		0	5 ft 1.5 m	10 ft 3 m	
S U C C U M E R I C I A L P U M P	1 ft .3 m	27/102	23/87	17/64	T H I S P U M P I S D E S I G N E D F O R H I G H P R E S S U R E A P P L I C A T I O N S
	5 ft 1.5 m	21/81	21/81	16/62	
	10 ft 3 m	20/76	19/70	11/43	
	12 ft 3.7 m	20/78	19/70	10/38	

gpm / lpm

36 Cycles Per Min.		DISCHARGE HEIGHT			S U C C U M E R I C I A L P U M P
		0	5 ft 1.5 m	10 ft 3 m	
S U C C U M E R I C I A L P U M P	1 ft .3 m	24/92	21/78	15/58	T H I S P U M P I S D E S I G N E D F O R H I G H P R E S S U R E A P P L I C A T I O N S
	5 ft 1.5 m	19/73	19/73	15/56	
	10 ft 3 m	18/68	17/63	10/39	
	12 ft 3.7 m	18/68	17/63	8/30	

gpm / lpm

30 Cycles Per Min.		DISCHARGE HEIGHT			S U C C U M E R I C I A L P U M P
		0	5 ft 1.5 m	10 ft 3 m	
S U C C U M E R I C I A L P U M P	1 ft .3 m	20/77	19/72	17/64	T H I S P U M P I S D E S I G N E D F O R H I G H P R E S S U R E A P P L I C A T I O N S
	5 ft 1.5 m	17.5/66	17/64	16/61	
	10 ft 3 m	17/64	16/61	15/57	
	12 ft 3.7 m	13/49	12/47	10/38	

gpm / lpm

20 Cycles Per Min.		DISCHARGE HEIGHT			S U C C U M E R I C I A L P U M P
		0	5 ft 1.5 m	10 ft 3 m	
S U C C U M E R I C I A L P U M P	1 ft .3 m	14/52	11/42	9/34	T H I S P U M P I S D E S I G N E D F O R H I G H P R E S S U R E A P P L I C A T I O N S
	5 ft 1.5 m	11/42	11/42	8/31	
	10 ft 3 m	10/38	9/34	6/22	
	12 ft 3.7 m	10/38	9/34	5/19	


gpm / lpm

13 Cycles Per Min.		DISCHARGE HEIGHT			S U C C U M E R I C I A L P U M P
		0	5 ft 1.5 m	10 ft 3 m	
S U C C U M E R I C I A L P U M P	1 ft .3 m	9/34	7/26	5/20	T H I S P U M P I S D E S I G N E D F O R H I G H P R E S S U R E A P P L I C A T I O N S
	5 ft 1.5 m	7/26	7/26	5/20	
	10 ft 3 m	7/26	6/23	4/14	
	12 ft 3.7 m	7/26	6/23	3/12	


gpm / lpm

DIMENSIONS

120ACA-200
120ACB-200

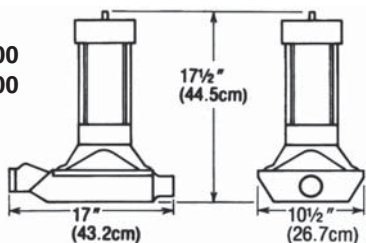

120AWA-200
120AWB-200

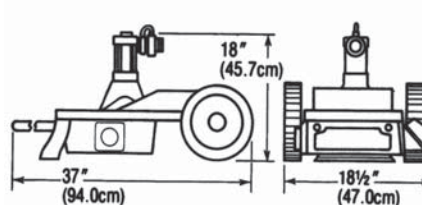

ORDERING INFORMATION

PUMP DESCRIPTION	MATERIAL	WEIGHT lbs/kgs	ORDER NO.
Base Mount	Aluminum	35 / 15.9	120ACA-200
Cart Mount	Aluminum	50 / 22.7	120AWA-200
Base Mount	Bronze	59 / 26.8	120ACB-200
Cart Mount	Bronze	68 / 30.8	120AWB-200

OPTIONS

DESCRIPTION	ORDER NO.
Viton® Diaphragm & Valves	230-1130V
Hypalon® Diaphragm & Valves	230-1130H
Polyurethane Coating	230-PC
Halar Coating	230-Halar

Option order # is added to the basic pump order #, ie 120AWB-200 w/ 230-1130V & 230-PC

VITON® AND HYPALON® ARE REGISTERED TRADEMARKS OF DUPONT DOW ELASTOMERS LLC

