


PEDESTAL PUMPS

The pedestal pump comes in thermoplastic and cast iron construction. Top inlet prevents loose debris in sump pit from entering pump.

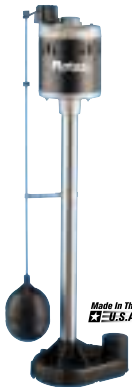

FPPSS5000

1/2 HP

EXCLUSIVE Full Lifetime Warranty

- Superior pumping performance – up to 4800 gallons per hour with 1-1/2" discharge
- Rugged, cast iron and stainless steel construction
- Heavy-duty motor with overload protection extends pump life
- Replaces any residential pedestal pump
- Quick, easy installation
- Fits in a 12" diameter sump basin


Made In The U.S.A. UL SP

FPPSS3000

1/3 HP

Better 2 Year Warranty

- Replaces any existing brand of 1/3 HP pedestal pump
- Rugged cast iron and stainless steel construction
- Quick, easy installation
- Fits in a 12" diameter sump basin
- 1-1/2" discharge
- Float turns pump on at 10 - 12" and off at 2-1/2" of water

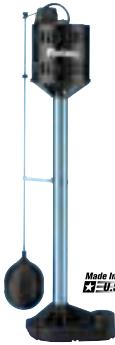


Made In The U.S.A. UL SP

FPPM3600D

1/3 HP

Good 1 Year Warranty

- Replaces any existing brand of 1/3 HP pedestal pump
- Thermoplastic construction
- 1-1/4" discharge
- Fits in a 12" diameter sump basin



TYPICAL APPLICATION

PERFORMANCE INFORMATION

Rating	Warranty (years)	Model	HP	Construction	Performance - Gallons per Hour at Discharge Head in Feet					Maximum Lift (no flow)
					0'	5'	10'	15'	20'	
EXCLUSIVE	Lifetime	FPPSS5000	1/2	Cast Iron	4800	4200	3830	2720	950	23 ft.
Better	2	FPPSS3000	1/3	Cast Iron	3480	3000	2460	1620	-	20 ft.
Good	1	FPPM3600D	1/3	Thermoplastic	3480	3000	2460	1620	-	20 ft.

SINK PUMP SYSTEM

The Sink Pump System is an economical, above-floor, corrosion-resistant pump system for home gray water handling applications. Applications include washing machine discharge from utility sinks, wet bars, air conditioners and dehumidifier drainage.



Made In The U.S.A. UL SP SPMA

FPOS1800LTS

1/4 HP

Better 1 Year Warranty

- Alternative direct drain sink pump system – ideal for washing machines, wet bars, air conditioning and dehumidifier drainage
- Easy installation – eliminates need for expensive plumbing renovation
- Maximum pumping capacity up to 2880 gallons per hour
- Heavy-duty 10 gallon polypropylene drainage tank
- Includes 1/4 HP automatic submersible sump pump
- Check valve included

PERFORMANCE INFORMATION

Rating	Warranty (years)	Model	HP	Switch Type	Min. Sump Diameter	Float Switch		Performance - Gallons per Hour at Discharge Head in Feet					Maximum Lift (no flow)
						On	Off	0'	5'	10'	15'	20'	
						Good	1	FPOS1800LTS	1/4	Float	14"	12.5"	