CAST IRON AUTOMATIC SUBMERSIBLE SUMP PUMPS

Depco Home

Cast iron automatic submersible sump pumps are constructed of rugged, cast iron with a screened bottom inlet. Each has an oil-cooled, high torque 115V motor with automatic overload protection.

FPSC3250A, FPSC2250A

FPSC3200A, FPSC2200A

FEATURES

- Automatic submersible sump pump
- Maximum pumping capacity – see performance chart below
- Heavy-duty cast iron construction
- 115V overload protected motor
- 8′ grounded power cord
- 1-1/2″ discharge pipe size

FPSC3250A — 1/2 HP

BEST 3 Year Warranty

- Maximum pumping capacity to 3630 gallons per hour
- Can be used in narrow 10″ diameter sump basin

FPSC3200A — 1/2 HP

BEST 3 Year Warranty

- Maximum pumping capacity to 3630 gallons per hour
- Can be used in 14″ diameter sump basin

FPSC2250A — 1/3 HP

Better 2 Year Warranty

- Maximum pumping capacity to 3150 gallons per hour
- Can be used in narrow 10″ diameter sump basin

FPSC2200A — 1/3 HP

Better 2 Year Warranty

- Maximum pumping capacity to 3150 gallons per hour
- Can be used in 14″ diameter sump basin

PERFORMANCE INFORMATION (Based on using 1-1/4″ discharge pipe)

Rating	Warranty (years)	Model	HP	Switch Type	Min. Sump Diameter	Float Switch On	Float Switch Off	Performance - Gallons per Hour at Discharge Head in Feet 0′	5′	10′	15′	20′	Maximum Lift (no flow)
EXCLUSIVE	LIFETIME	FPSC4550A	1/2	Vertical	10"	6"	2"	4500	4080	3480	2880	2380	32 ft.
BEST	3	FPSC3250A	1/2	Vertical	10″	7-1/2″	3″	3630	3200	2700	2000	1200	24 ft.
BEST	3	FPSC3200A	1/2	Float	14″	13″	5″	3630	3200	2700	2000	1200	24 ft.
Better	2	FPSC2250A	1/3	Vertical	10″	7-1/2″	3″	3150	2760	2160	1410	–	20 ft.
Better	2	FPSC2200A	1/3	Float	14″	13″	5″	3150	2800	2200	1400	–	20 ft.

TYPICAL APPLICATION

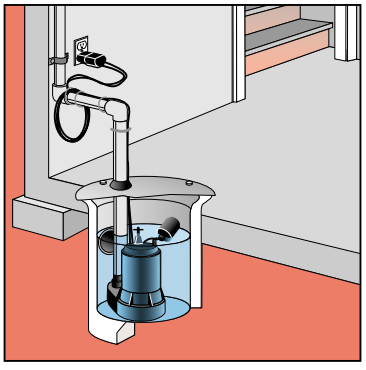

ACCESSORIES (sold separately, see page 10)

Required:

Check Valve	FP0026-10
Flood Alarm	FPW217-242
Discharge Hose Kit	FP0012-6F 1-1/4″ x 24′
	or
	FP150-24 1-1/2″ x 24′

Optional: (see page 8)

Battery Back-Up	FP1800DCC or FP2800DCC