



3GV Plus

SUBMERSIBLE 3" SEWAGE PUMP CURVES

**6.5 - 9.5 HP SINGLE PHASE AND
4.4 - 5.5 HP SINGLE PHASE**

6.5 - 9.5 HP Single Phase

3GV Plus 1Ø Composite Curve

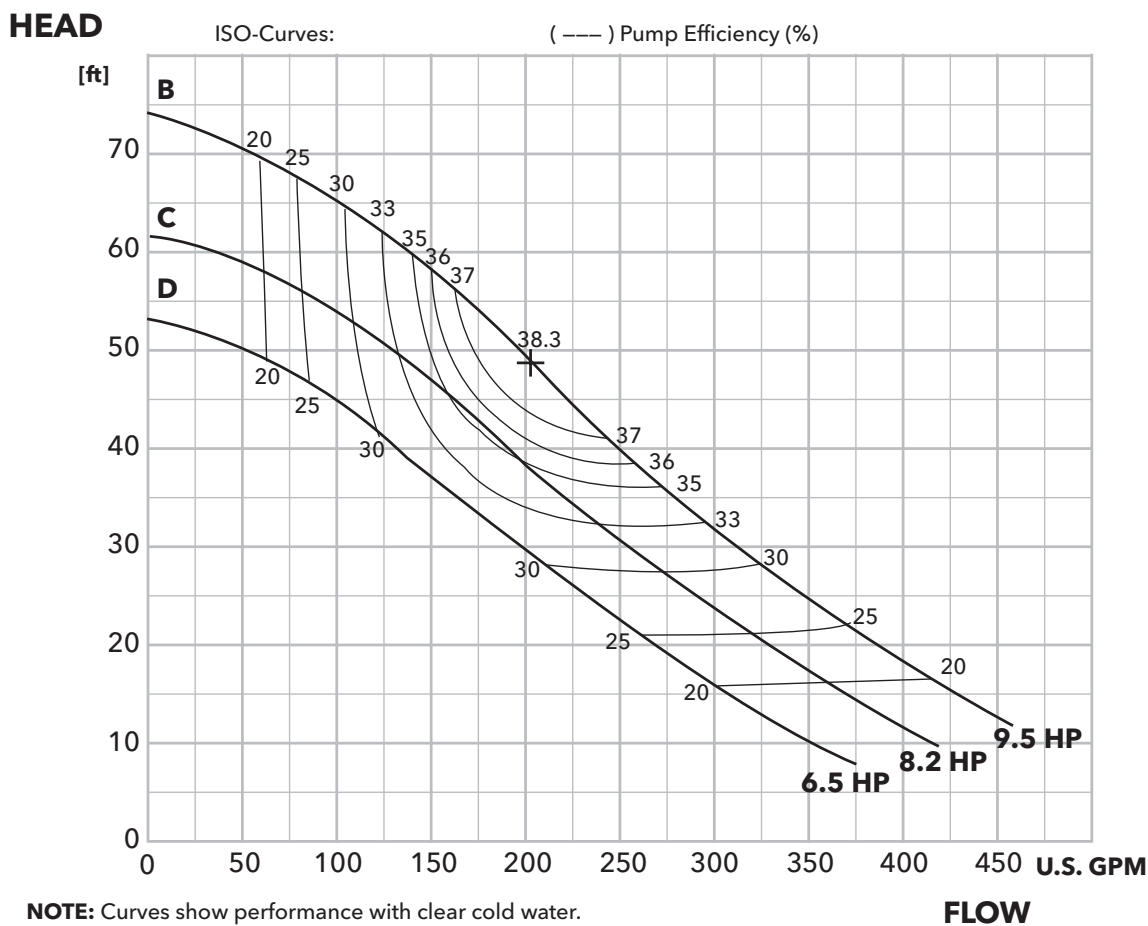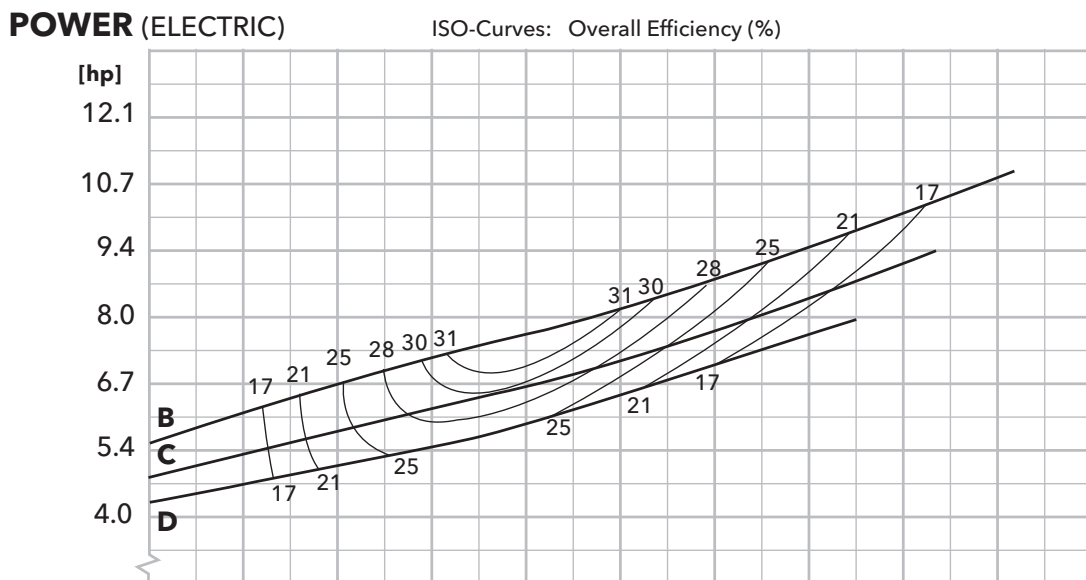

NOTE: Curves show performance with clear cold water.


B = 5.43"	D = 4.84"
C = 5.12"	

3GV Plus 1Ø

POWER



HEAD

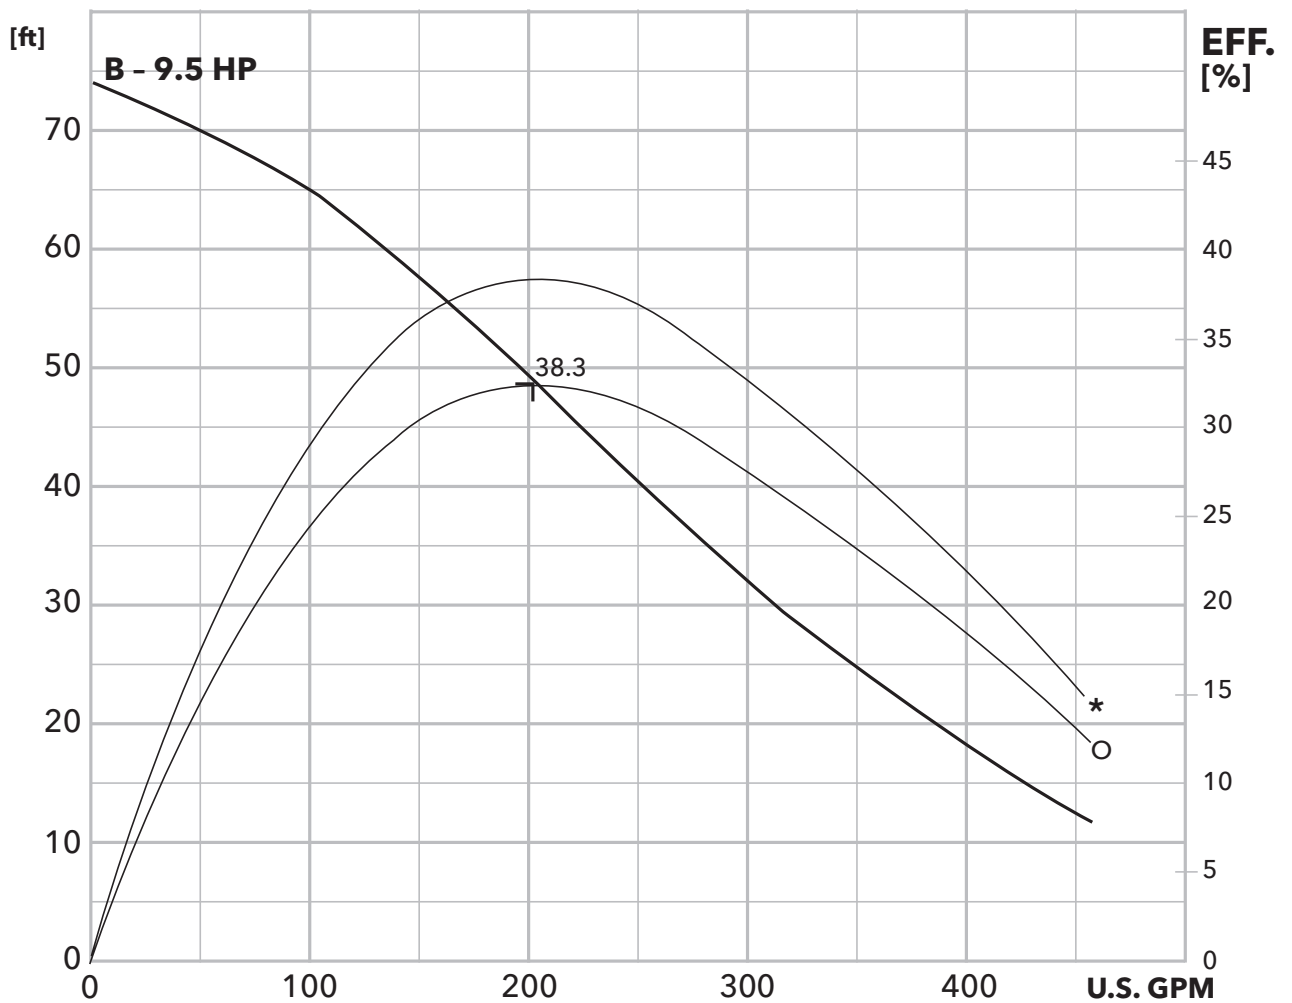

NOTE: Curves show performance with clear cold water.

*: Pump efficiency / shaft power

○: Overall efficiency / input power


FLOW

3GV Plus 1Ø

POWER



HEAD

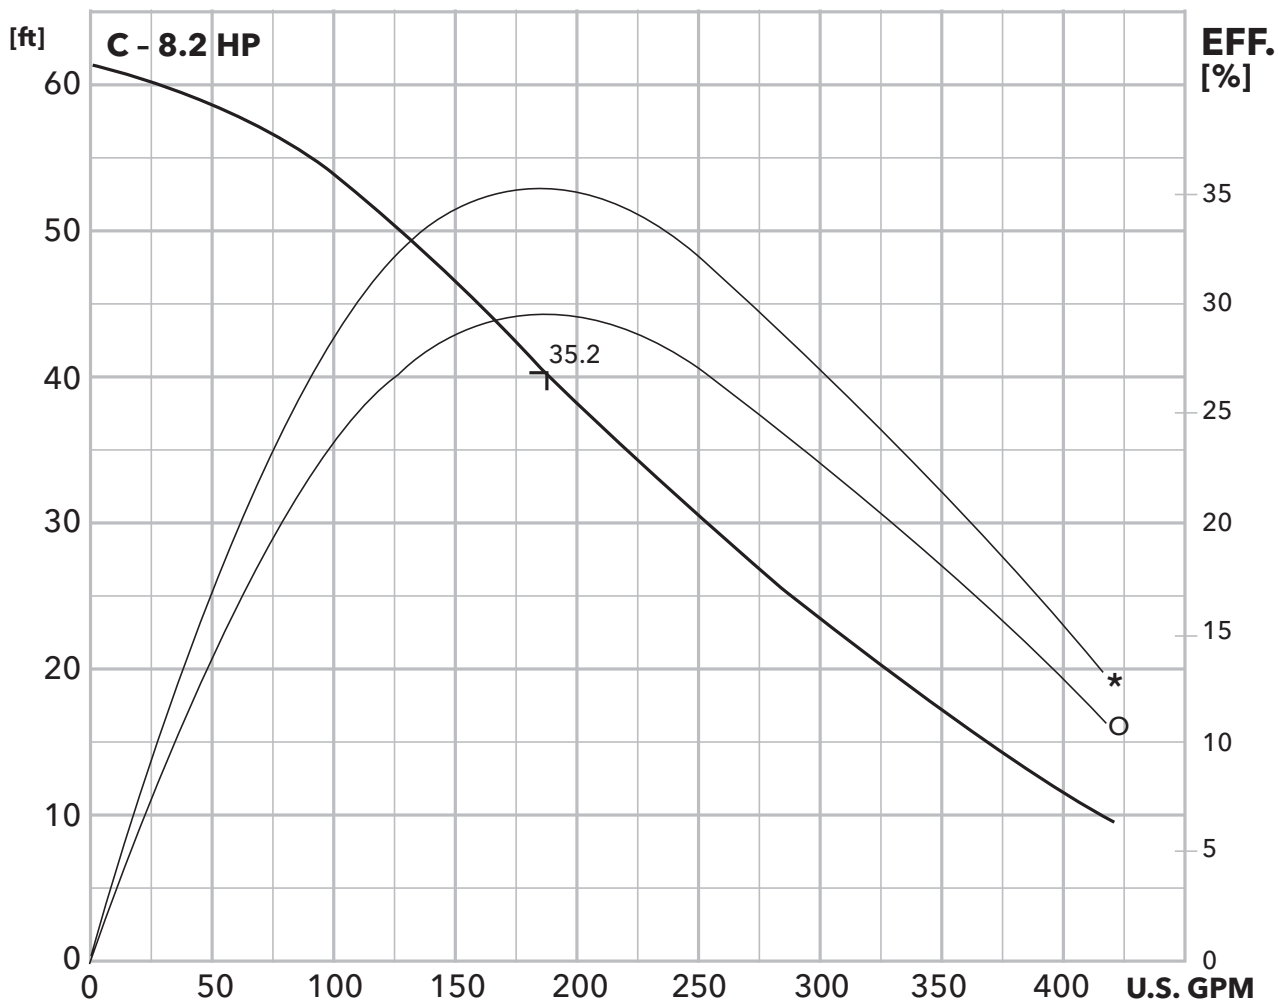

NOTE: Curves show performance with clear cold water.

*: Pump efficiency / shaft power

O: Overall efficiency / input power


FLOW

3GV Plus 1Ø

POWER



HEAD

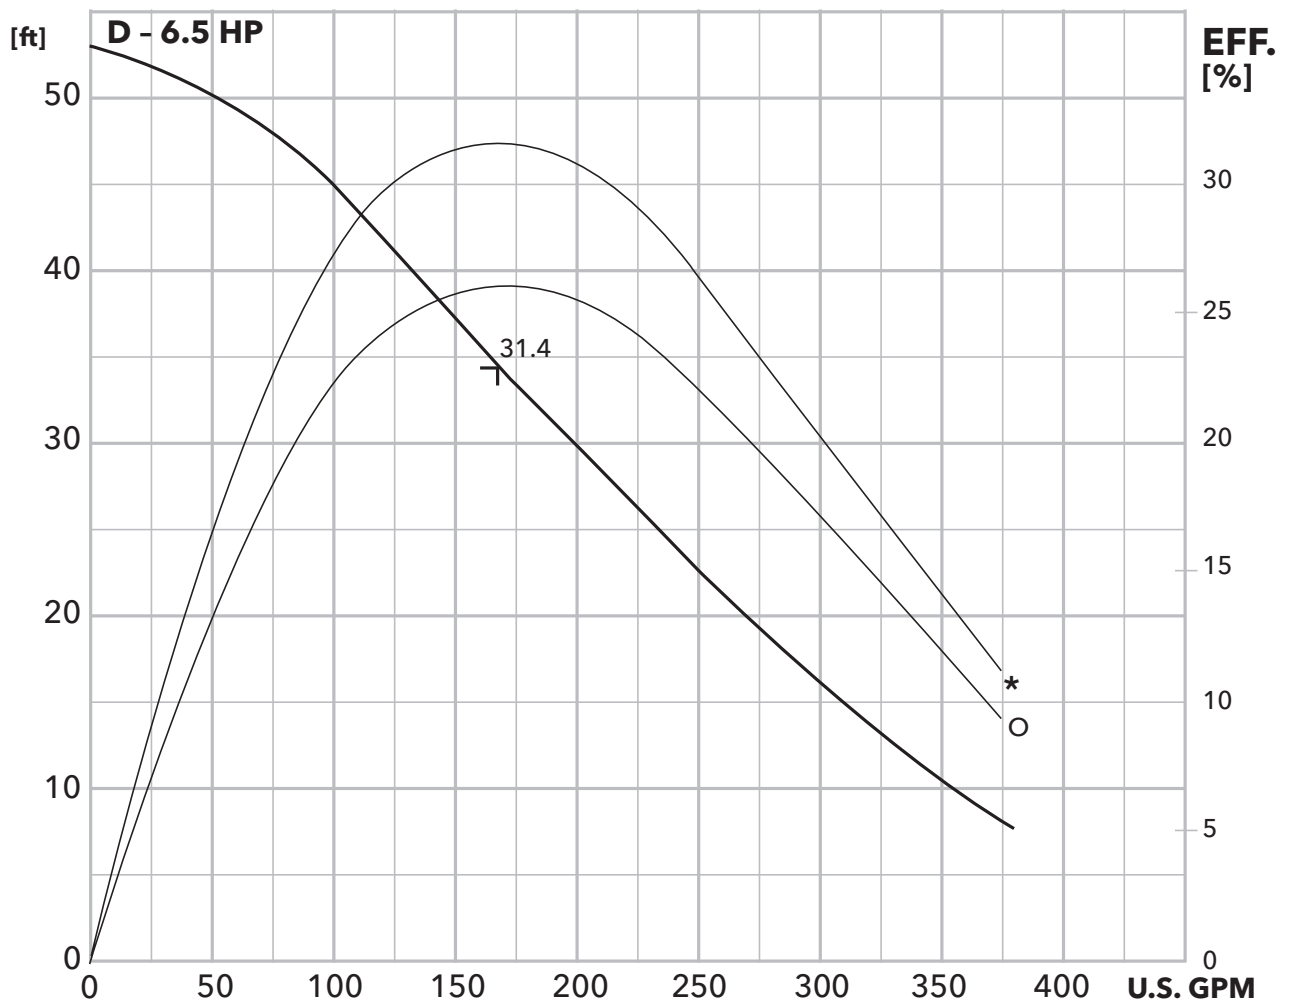

NOTE: Curves show performance with clear cold water.



*: Pump efficiency / shaft power

O: Overall efficiency / input power

FLOW

4.4 - 5.5 HP Single Phase


3GV Plus 1Ø Composite Curve

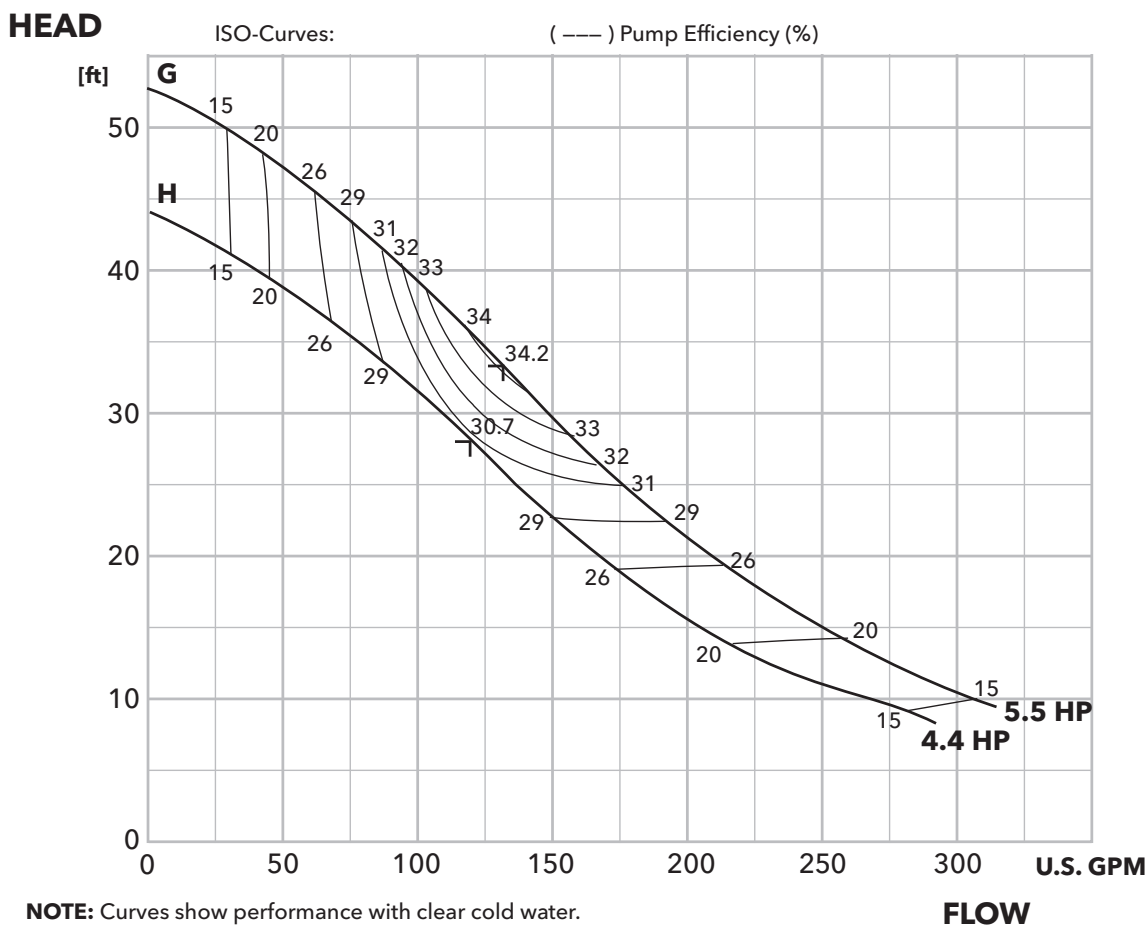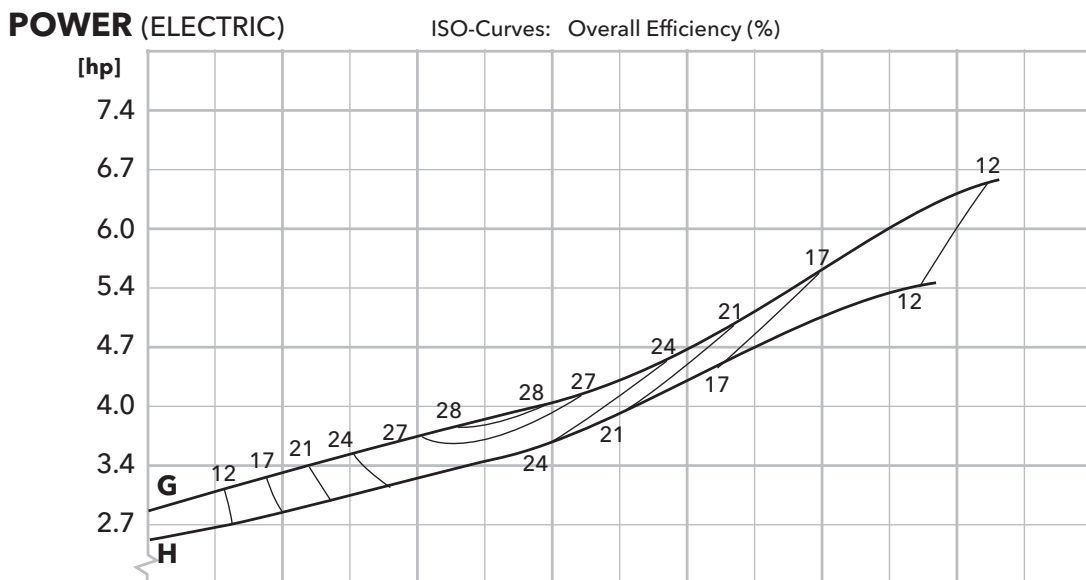


<p>G = 4.29"</p> <p>H = 3.98"</p>

3GV Plus 1Ø

POWER

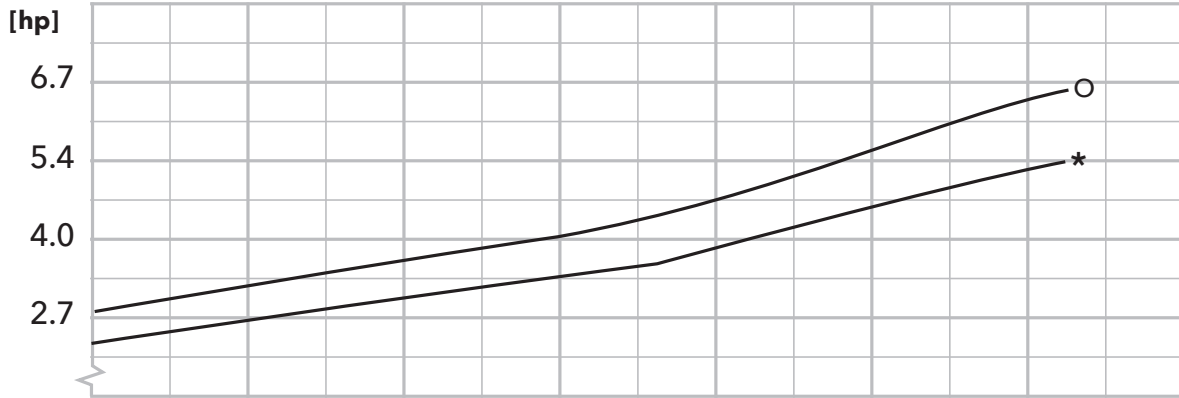

HEAD

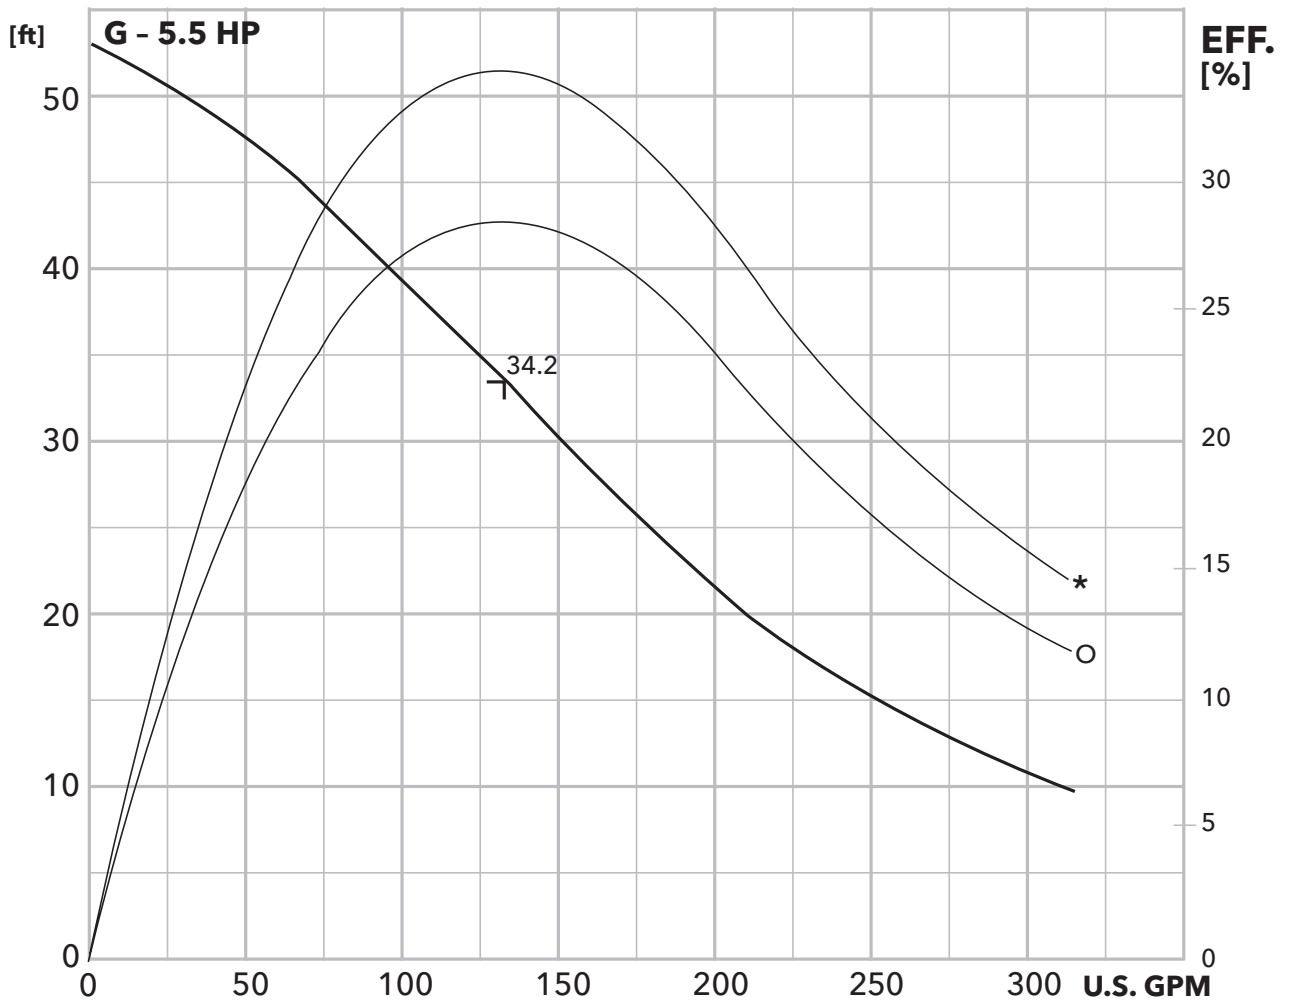


NOTE: Curves show performance with clear cold water.

*: Pump efficiency / shaft power


○: Overall efficiency / input power

FLOW

POWER

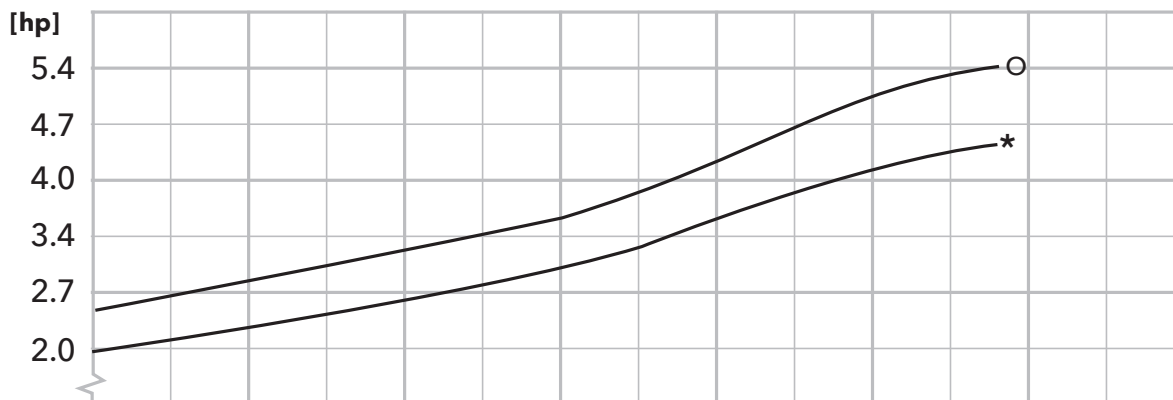

HEAD

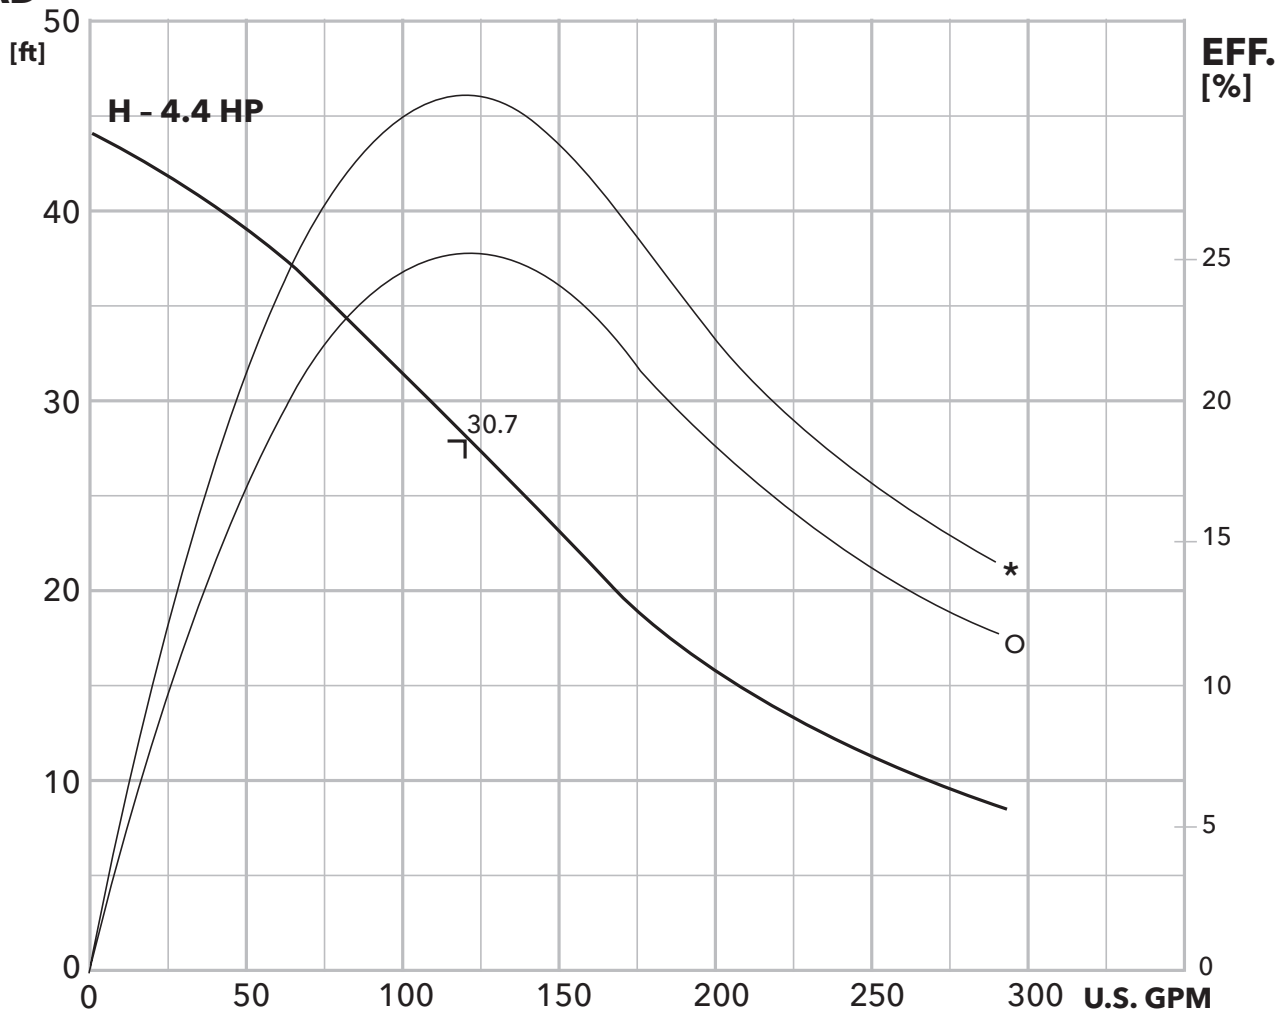

NOTE: Curves show performance with clear cold water.

*: Pump efficiency / shaft power

O: Overall efficiency / input power



Xylem, Inc.
 2881 East Bayard Street Ext., Suite A
 Seneca Falls, NY 13148
 Phone: (866) 325-4210
 Fax: (888) 322-5877
www.xylem.com/brands/gouldswatertechnology

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
 © 2012 Xylem Inc. C3GVPLUS May 2012