

OEM *Options*

BELLOWS METERING PUMPS

GRI specializes in the adaptation of standard models to meet the ever-changing needs of the Original Equipment Market. Contact us if one of our standard models does not meet your specific requirements.

Motors

Speeds

Standard motor speeds are 39, 60, 90 and 165 RPM at 60 Hz. Gearmotors can be supplied in virtually any speed up to 165 RPM.

Voltages


Standard voltages are 115V, 50/60 Hz or 230V, 50/60 Hz. However, the following special voltages are also available: 12 and 24 VDC.

Designs

The standard motor is an open, shaded pole gearmotor. Motors are also available with brakes.

Options

Units without motors (pedestal models) are available on some models.

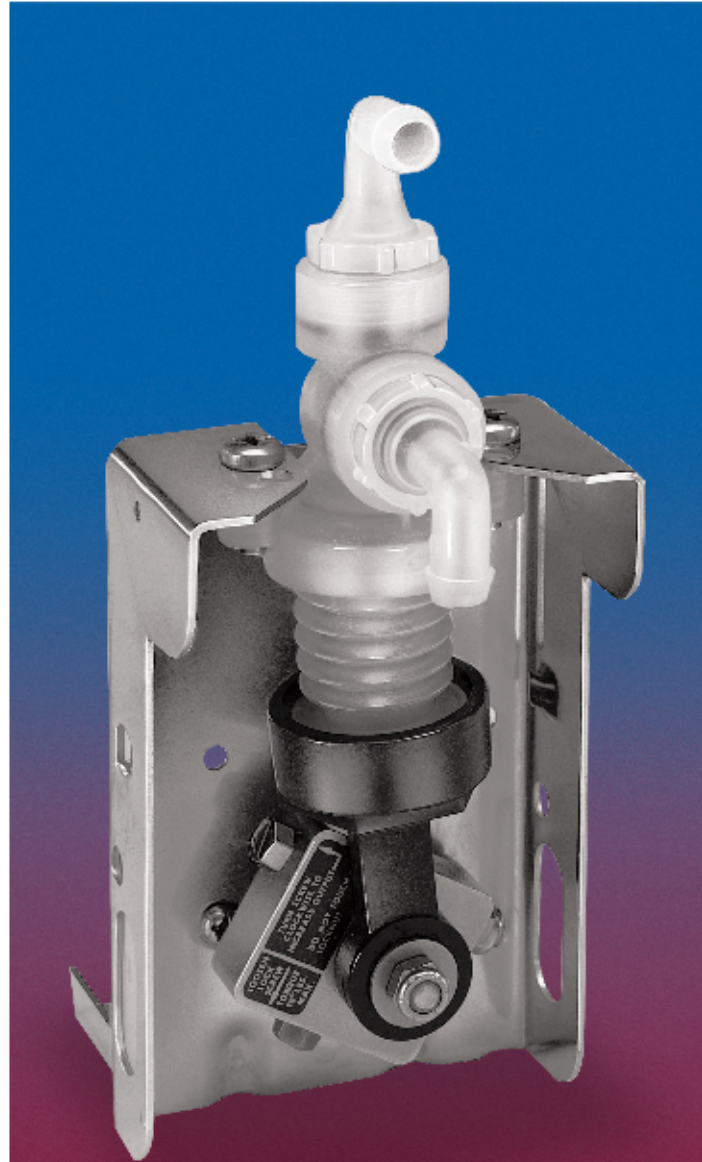

PEDESTAL MODEL

BELLOWS METERING PUMPS - OEM OPTIONS

Valve Bodies

Standard valve body on the bellows pump is a 90° valve body. Vertical and T-head valve bodies can be substituted on all bellows sizes except the 1/2" bellows.



Poppet Valve

Standard poppet valve materials are available. Polypropylene material can be substituted.



Pump Cover

Bellows pumps are available with or without a stainless steel cover, front shield, on/off switch, and cord and plug.

Mounting brackets are also available with epoxy-coated rolled steel. However, a minimum quantity purchase is required.

