

PARTS MANUAL

INSTALLATION & SERVICE

Hydra-Cell[®] INDUSTRIAL VALVES

IMPORTANT

Record your pump model number and serial number here for easy reference:

Model No. _____


Serial No. _____

Date of Purchase _____

When ordering parts or making inquiries about this pump, please mention the model and serial numbers.

MODELS: C-22, C-23, C-24

BYPASS PRESSURE REGULATING VALVES

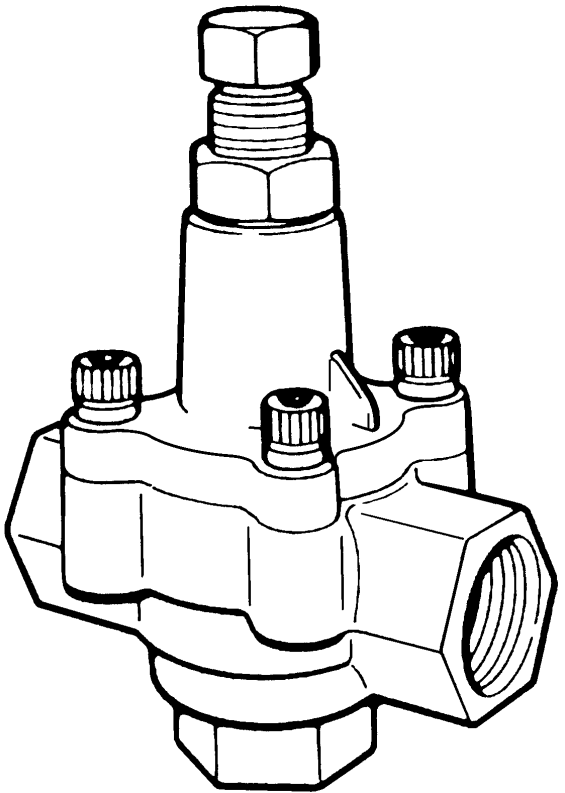

WANNER ENGINEERING, INC.

1204 Chestnut Avenue, Minneapolis, MN 55403
TEL: (612) 332-5681 FAX: (612) 332-6937
TOLL-FREE FAX [US only]: (800) 332-6812

www.hydra-cell.com
email: sales@wannereng.com
Document Fax Back System: (510) 745-0440

C-22/C-23/C-24 Contents

	Page
Specifications	2
Installation	4
Disc Arrangement	5
C-22 Parts	6
C-23 Parts	8
C-24 Parts	10
Repair & Troubleshooting	11

C-22/C-23/C-24 Specifications

Specifications

Capacity	Maximum		Minimum	
	gpm	l/min	gpm	l/min
C-22	10	37.8	3	11.3
C-23	20	75.7	3	11.3
C-24	40	151.4	5	18.9

Pressure Range	Model Configuration			
	AA	AB	AC	AE
psi				
C-22	75-500	500-1000	1000-1500	1500-2500
C-23	75-500	500-1000	1000-1500	1500-2500
C-24	75-500	500-1000	1000-1500	—
bar				
C-22	5.3-34.5	34.5-69	69-103	103-172
C-23	5.3-34.5	34.5-69	69-103	103-172
C-24	5.3-34.5	34.5-69	69-103	—

Max Temperature: 200°F

Inlet and Outlet Ports:

C-22	3/4" NPT
C-23	1" NPT
C-24	1-1/4" NPT

Dimensions: (H x W x D)

C-22- AA, AB, AC	6.0 x 3.4 x 2.2 in. (152.4 x 86.4 x 55.9 mm)
C-22- AE	6.4 x 3.4 x 2.2 in. (163.6 x 86.4 x 55.9 mm)
C-23-AA, AB, AC	7.0 x 4.8 x 2.8 in. (178 x 122 x 71.1 mm)
C-23-AE	7.4 x 4.8 x 2.8 in. (188 x 122 x 71.1 mm)
C-24-AA, AB, AC	9.0 x 5.4 x 3.3 in. (229 x 137.2 x 83.8 mm)

Weight

C-22	3 lbs (1.3 kg)
C-23	6 lbs (2.7 kg)
C-24	10 lbs (4.5 kg)

C-22/C-23/C-24 Installation

Location

The Bypass Pressure Regulating Valve prevents system pressure from exceeding a preset maximum. As the system approaches this maximum pressure, excess fluid is bypassed (to a supply tank, or to the pump inlet). This prevents overpressurization and system failures.

Install the regulating valve between the pump outlet (as close to the pump as possible) and any shut-off device in the discharge plumbing. It may be located **in** the discharge line, or **off**-line:

- If in-line, use either of the horizontal ports as the inlet and the other as the outlet;
- If off-line, use either of the horizontal ports as the inlet and plug the other one.

The **bottom** port is always the bypass port.

Mounting Position

The preferred mounting position is vertical with the adjusting bolt at the top.

Connections


For best operation, the bypass line should return to the supply tank. If you must plumb the bypass line back to the pump inlet instead, have it enter the inlet line as far from the pump as possible. Contact the pump manufacturer, as a pressure regulator may be required in the pump inlet.

The bypass line should be as large as the ports of the regulating valve. Do **not** install shutoff valves or other restrictions.

Install a high-quality industrial pressure gauge in the discharge system to monitor system pressure. Failure to do so may result in overpressurization and premature failure of pumping system components.

For smoothest operation and minimal pressure spiking when the discharge system is closed (closed gun, plugged nozzles, valve closed), about 10% of the rated flow of the regulating valve should be bypassed at all times.

Example: With the C22A valve (rated at 10 gpm), 1 gpm should be bypassing at all times during operation. If the desired spray gun delivery is 6 gpm, then the pump should deliver 7 gpm (6 gpm to the gun and 1 gpm to be bypassed). The nozzle orifices should be properly sized for 6 gpm delivery at the desired pressure; the pump RPM for 7 gpm; and the pump HP for 7 gpm at the bypass pressure (bypass pressure is higher than nozzle pressure).

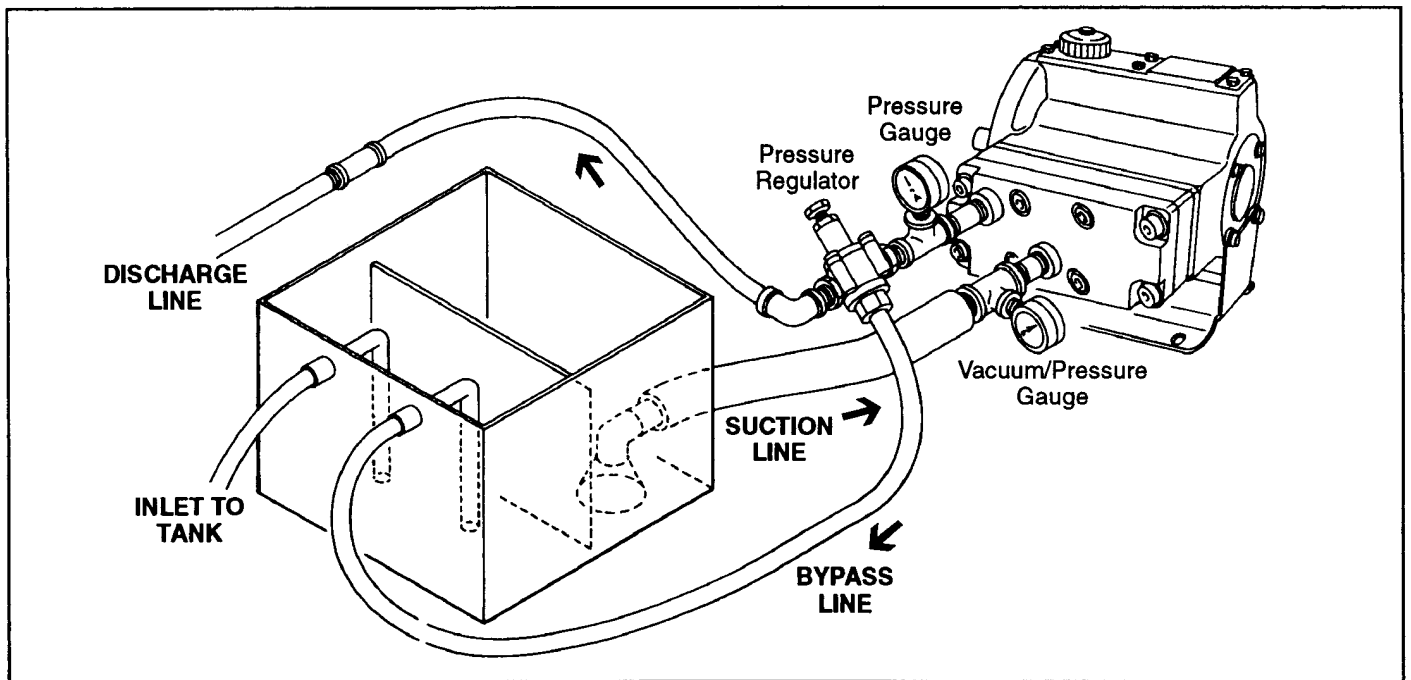

C-22/C-23/C-24 Installation

Pressure Adjustment

Systems *with* Shutoff Guns or Valves


1. Turn off the system.
2. Turn the adjusting nut counterclockwise until there is no longer any pressure on the springs in the regulating valve.
3. Close the discharge line.
4. Be sure the piping and all valves and nozzles are open.
With an accurate pressure gauge installed in the system, start the system and let it run for a few minutes to remove any air.
5. When all air has been removed, begin turning the adjusting nut clockwise until the desired bypass pressure is reached.
Do not exceed the maximum rated pressure of the pump or the regulating valve!
6. Open and close the discharge line 3 or 4 times. Re-check the bypass pressure each time, and readjust if necessary. Turn the adjusting nut clockwise to increase or counterclockwise to reduce the pressure.
7. Check that the fluid bypass is continuous and adequate. With guns or valves open, you should be bypassing about 10% of the rated flow of the regulating valve (see the Example above). If the system discharge pressure is less than desired when 10% of the flow is bypassing, check the pump speed and delivery and the size of the nozzle or system orifice.
8. When both the bypass pressure and the flow have been set, turn the locknut clockwise to lock in the adjustment.

Systems *without* Shutoff Guns or Valves


Note: When making this adjustment, you must be able to observe the amount of fluid being bypassed.

1. Turn off the system.
2. Turn the adjusting nut counterclockwise until there is no longer any pressure on the springs in the regulating valve.
3. With an accurate pressure gauge installed in the system start the system and let it run for a few minutes to remove any air. The full flow of the pump should be bypassing.
4. Be sure all nozzles are open.
5. When all air has been removed, begin turning the adjusting nut clockwise until the desired bypass pressure is reached, or until no fluid is being bypassed — whichever occurs first.
Do not exceed the maximum rated pressure of the pump or the regulating valve!
6. If the system discharge pressure is less than desired, check the pump speed and delivery and the size of the nozzle or system orifice.
7. When both the bypass pressure and the flow have been set, turn the locknut clockwise to lock in the adjustment.


C-22

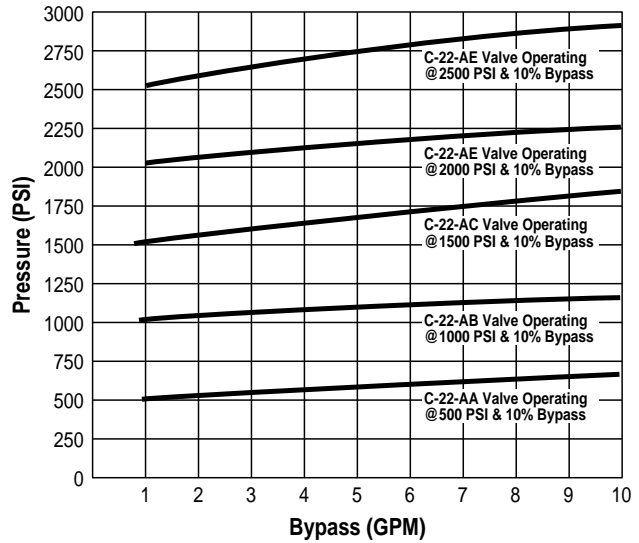













C-23

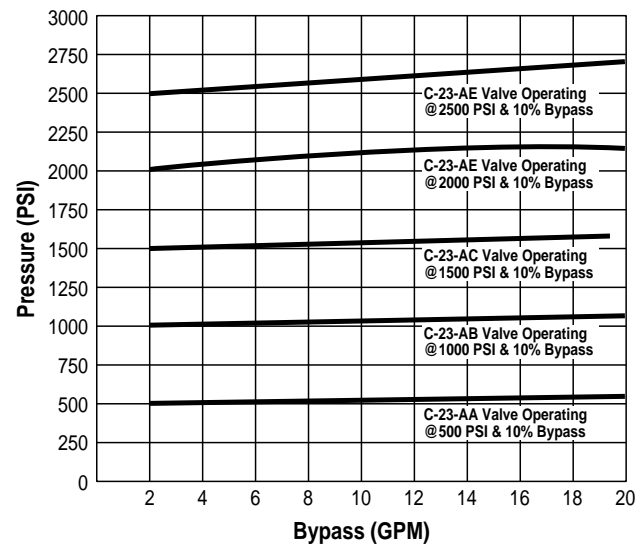

C-24

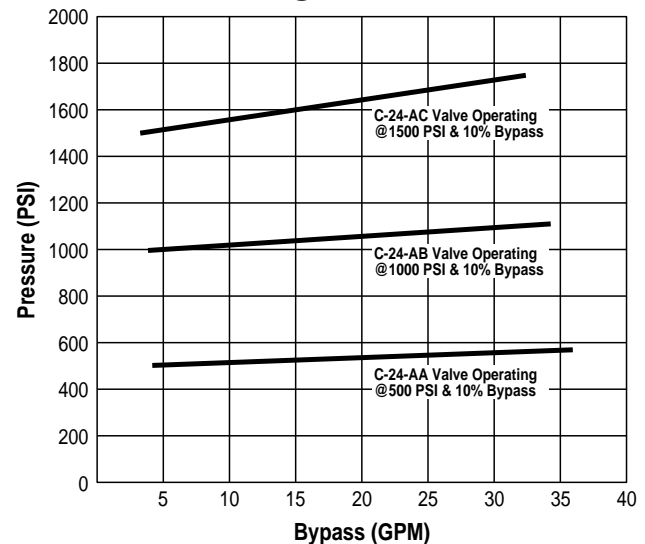


Spring Disc Arrangement

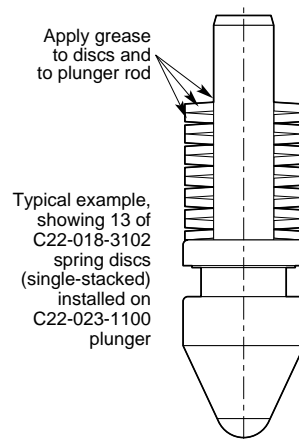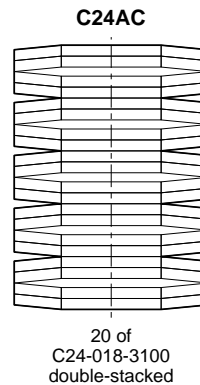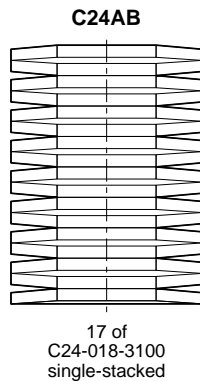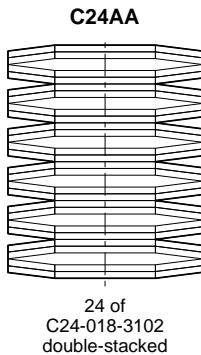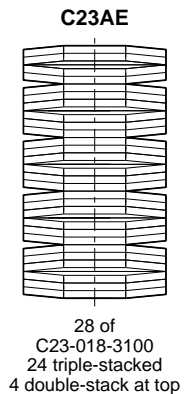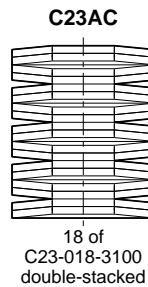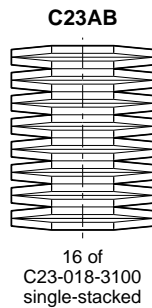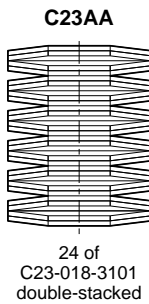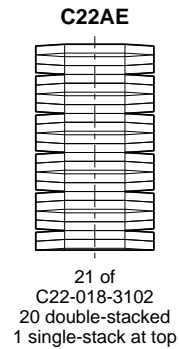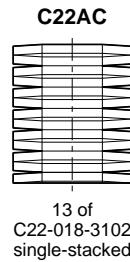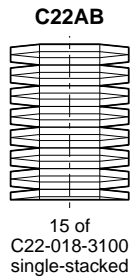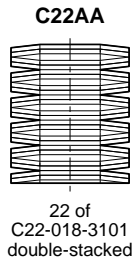

Spring Disc Size and Arrangement

Valve Model	GPM	PSI	Disc Size OD x ID x Thickness	Quantity Used
C-22-AA	3-10	75-500	20 x 10.2 x 0.8 mm	22 (double stack)
C-22-AB	3-10	500-1000	20 x 10.2 x 1.2 mm	15 (single stack)
C-22-AC	3-10	1000-1500	20 x 10.2 x 1.5 mm	13 (single stack)
C-22-AE	3-10	1500-2500	20 x 10.2 x 1.5 mm	1 (single stack); 20 (double stack)
C-23-AA	3-20	75-500	28 x 12.2 x 1.0 mm	24 (double stack)
C-23-AB	3-20	500-1000	28 x 12.2 x 1.5 mm	16 (single stack)
C-23-AC	3-20	1000-1500	28 x 12.2 x 1.5 mm	18 (double stack)
C-23-AE	3-20	1500-2500	28 x 12.2 x 1.5 mm	4 (double stack); 24 (triple stack)
C-24-AA	5-40	75-500	35.5 x 18.3 x 1.2 mm	24 (double stack)
C-24-AB	5-40	500-1000	35.5 x 18.3 x 2.0 mm	17 (single stack)
C-24-AC	5-40	1000-1500	35.5 x 18.3 x 2.0 mm	20 (double stack)

C-22 Parts

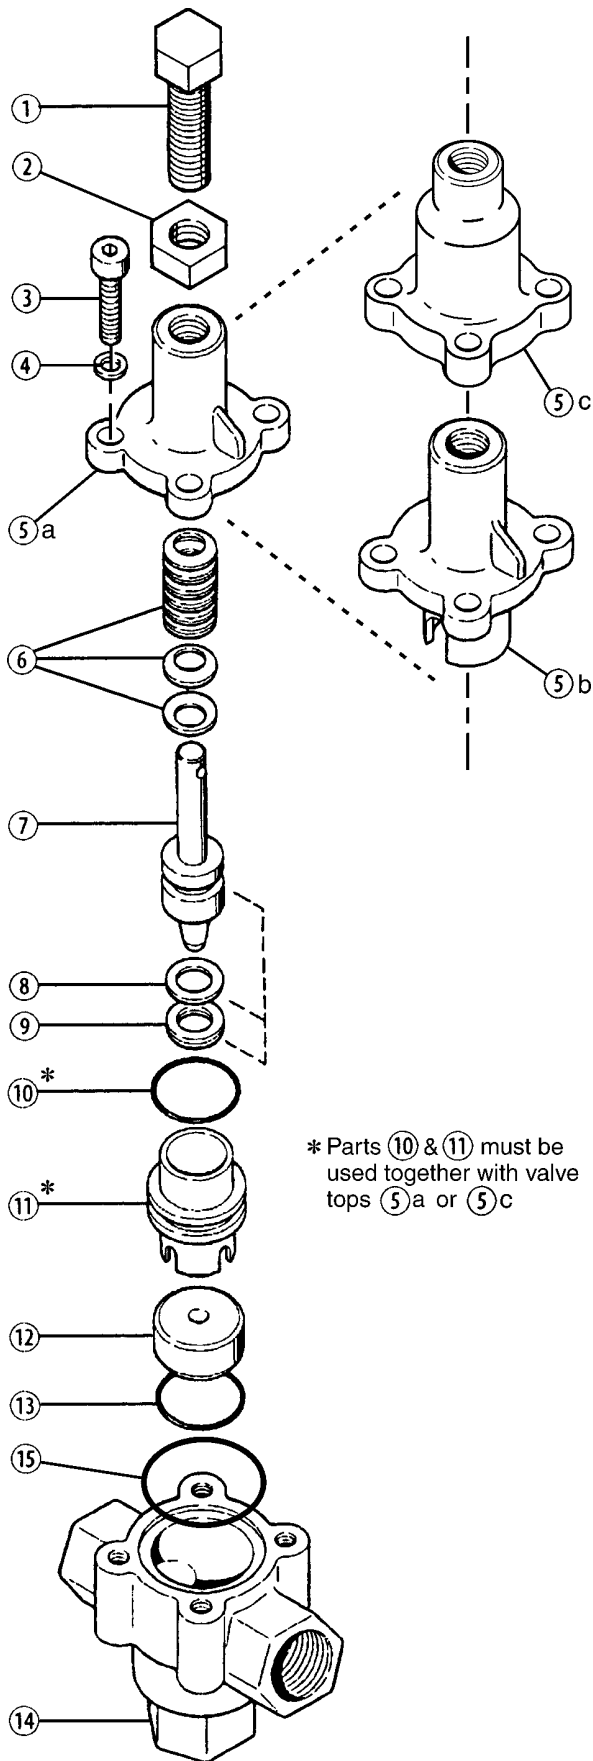

C-22-AA
C-22-AB
C-22-AC

Brass Body

Ref #	Part Number	Description	Quantity/ Pump
1	C22-004-1005	Adjusting Bolt, Pressure Range A	1
	C22-004-1006	Adjusting Bolt, Pressure Range B, C ...	1
2	C22-005-1000	Jam Nut.....	1
3	C22-015-2000	Cap Screw, 5/16 x 1"	4
4	C22-014-2000	Lock Washer, 5/16"	4
5a	C22-003-1002	Valve Top, unwetted.....	1
5b	C22-003-1000	Valve Top, brass	1
6	C22-018-3100	Spring Disc, 20 x 10.2 x 1.2 mm	**
	C22-018-3101	Spring Disc, 20 x 10.2 x 0.8 mm	**
	C22-018-3102	Spring Disc, 20 x 10.2 x 1.5 mm	**
7	C22-023-1100	Plunger Assembly, 316 SST	1
	C22-023-1101	Plunger Assembly, SST, with tungsten carbide ball	1
	C22-023-1103	Plunger Assembly, 17-4 PH SST	1
	C22-023-1117	Plunger Assembly, Hastelloy C-276 ..	1
8	C22-013-2110	Seal, back-up, Buna	1
	C22-013-2117	Seal, back-up, UHMW polyethylene ...	1
	C22-013-2118	Seal, back-up, Teflon	1
9	C22-012-2110	Seal, Buna	1
	C22-012-2111	Seal, Viton	1
	C22-012-2113	Seal, EPDM	1
	C22-012-2115	Seal, urethane	1
10*	C22-011-2110	O-ring, sleeve, Buna	1
	C22-011-2111	O-ring, sleeve, Viton	1
	C22-011-2113	O-ring, sleeve, EPDM	1
11*	C22-024-1010	Sleeve, 316 SST	1
	C22-024-1017	Sleeve, Hastelloy C-276	1
12	C22-006-1000	Seat, 316 SST	1
	C22-006-1001	Seat, 17-4 HT	1
	C22-006-1002	Seat, tungsten carbide	1
	C22-006-1017	Seat, Hastelloy C-276.....	1
13	C22-010-2110	O-ring, valve seat, Buna	1
	C22-010-2111	O-ring, valve seat, Viton	1
	C22-010-2113	O-ring, valve seat, EPDM	1
14	C22-002-1000	Body, valve, brass, NPT	1
15	C22-011-2110	O-ring, Buna	1
	C22-011-2111	O-ring, Viton	1
	C22-011-2113	O-ring, EPDM	1
-	C22-022-2400	Name Plate (specify model & serial no.)	1

** See page 5 for spring disc quantities and arrangements.

C-22 Parts

C-22-AA
C-22-AB
C-22-AC

Stainless Steel Body
Nickel Alloy Body

Ref #	Part Number	Description	Quantity/ Pump
1	C22-004-1005	Adjusting Bolt, Pressure Range A	1
	C22-004-1006	Adjusting Bolt, Pressure Range B, C	1
2	C22-005-1000	Jam Nut	1
3	C22-015-2000	Cap Screw, 5/16 x 1"	4
4	C22-014-2000	Lock Washer, 5/16"	4
5a	C22-003-1002	Valve Top, nonwetted	1
6	C22-018-3100	Spring Disc, 20 x 10.2 x 1.2 mm	**
	C22-018-3101	Spring Disc, 20 x 10.2 x 0.8 mm	**
	C22-018-3102	Spring Disc, 20 x 10.2 x 1.5 mm	**
7	C22-023-1000	Plunger Assembly, 316 SST	1
	C22-023-1001	Plunger Assembly, SST, with tungsten carbide ball	1
	C22-023-1003	Plunger Assembly, 17-4 PH SST	1
	C22-023-1007	Plunger Assembly, Hastelloy C-276	1
8	C22-013-2110	Seal, back-up, Buna	1
	C22-013-2117	Seal, back-up, UHMW polyethylene	1
	C22-013-2118	Seal, back-up, Teflon	1
9	C22-012-2110	Seal, Buna	1
	C22-012-2111	Seal, Viton	1
	C22-012-2113	Seal, EPDM	1
	C22-012-2115	Seal, urethane	1
10*	C22-016-2110	O-ring, sleeve, Buna	1
	C22-016-2111	O-ring, sleeve, Viton	1
	C22-016-2113	O-ring, sleeve, EPDM	1
11*	C22-024-1010	Sleeve, 316 SST	1
	C22-024-1017	Sleeve, Hastelloy C-276	1
12	C22-006-1000	Seat, 316 SST	1
	C22-006-1001	Seat, 17-4 HT	1
	C22-006-1002	Seat, tungsten carbide	1
	C22-006-1017	Seat, Hastelloy C-276	1
13	C22-010-2110	O-ring, valve seat, Buna	1
	C22-010-2111	O-ring, valve seat, Viton	1
	C22-010-2113	O-ring, valve seat, EPDM	1
14	C22-002-1002	Body, valve, 316 SST, NPT	1
	C22-002-1017	Body, valve, nickel alloy C series NPT	1
15	C22-011-2110	O-ring, Buna	1
	C22-011-2111	O-ring, Viton	1
	C22-011-2113	O-ring, EPDM	1
-	C22-022-2400	Name Plate (specify model & serial no.)	1


** See page 5 for spring disc quantities and arrangements.

C-22-AE

Brass Body
Stainless Steel Body
Nickel Alloy Body

Ref #	Part Number	Description	Quantity/ Pump
1	C22-004-1008	Adjusting Bolt, pressure range E	1
2	C22-005-1000	Jam Nut	1
3	C22-015-2010	Cap Screw, 5/16 x 1-1/4"	4
4	C22-014-2000	Lock Washer, 5/16"	4
5c	C22-003-1003	Valve Top, non-wetted, 2500 psi	1
6	C22-018-3102	Spring Disc, 20 x 10.2 x 1.5 mm	21
7	C22-023-1000	Plunger Assembly, 316 SST	1
	C22-023-1003	Plunger Assembly, 17-4 PH SST	1
	C22-023-1007	Plunger Assembly, Hastelloy C-276	1
8	C22-013-2110	Seal, back-up, Buna	1
	C22-013-2118	Seal, back-up, Teflon	1
9	C22-012-2110	Seal, Buna	1
	C22-012-2111	Seal, Viton	1
10*	C22-016-2110	O-ring, sleeve, Buna	1
	C22-016-2111	O-ring, sleeve, Viton	1
11*	C22-024-1010	Sleeve, 316 SST	1
	C22-024-1017	Sleeve, Hastelloy C-276	1
12	C22-006-1000	Seat, 316 SST	1
	C22-006-1001	Seat, 17-4 HT	1
	C22-006-1017	Seat, Hastelloy C-276	1
13	C22-010-2110	O-ring, valve seat, Buna	1
	C22-010-2111	O-ring, valve seat, Viton	1
14	C22-002-1000	Body, valve, brass, NPT	1
	C22-002-1002	Body, valve, 316 SST, NPT	1
	C22-002-1017	Body, valve, nickel alloy C series NPT	1
15	C22-011-2110	O-ring, Buna	1
	C22-011-2111	O-ring, Viton	1
-	C22-022-2400	Name Plate (specify model & serial no.)	1

C-23 Parts

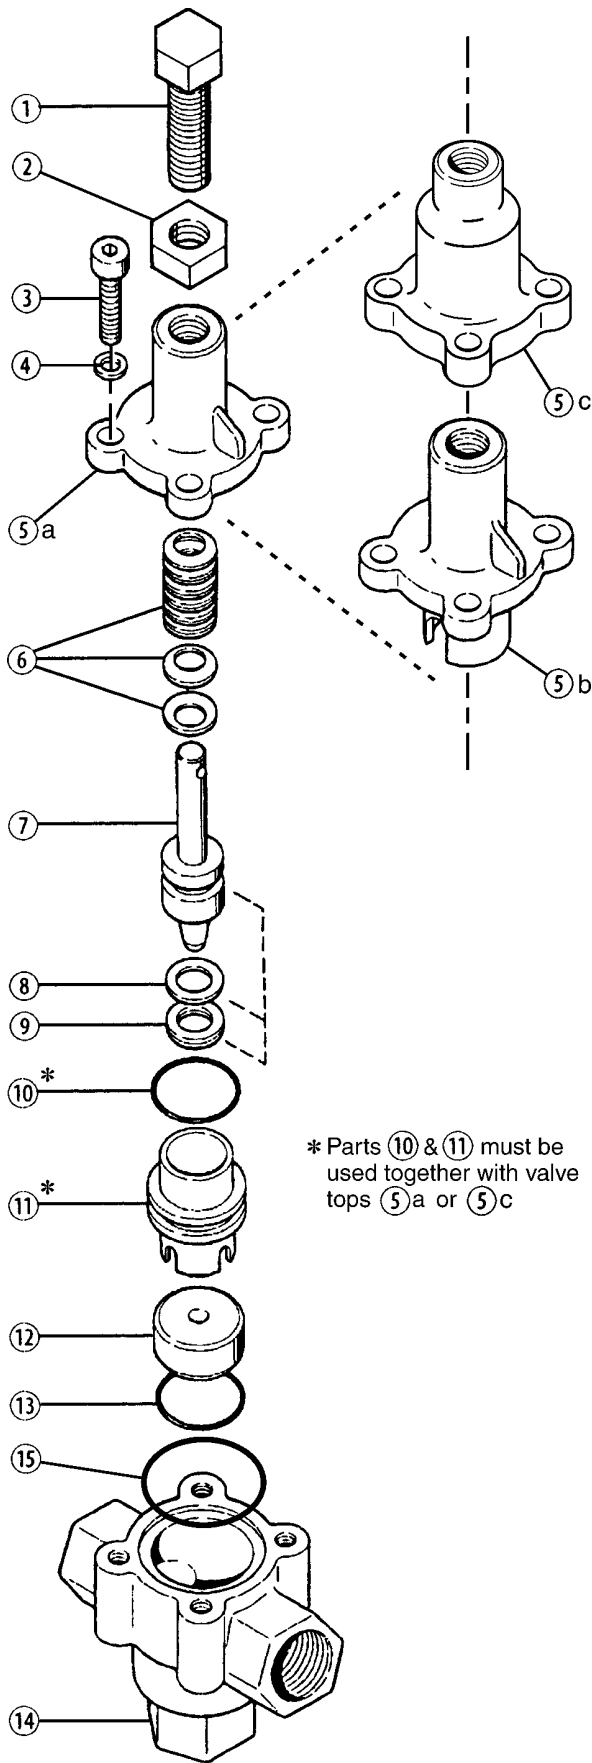

* Parts ⑩ & ⑪ must be used together with valve tops ⑤a or ⑤c

C-23-AA
C-23-AB
C-23-AC

Brass Body

Ref #	Part Number	Description	Quantity/ Pump
1	C23-004-1005	Adjusting Bolt, Pressure Range A	1
	C23-004-1006	Adjusting Bolt, Pressure Range B	1
	C23-004-1007	Adjusting Bolt, Pressure Range C	1
2	C23-005-1000	Jam Nut.....	1
3	D25-029-2010	Cap Screw, 3/8 x 1-1/4"	4
4	D10-048-2010	Lock Washer, 3/8"	4
5a	C23-003-1002	Valve Top. Nonwetted	1
5b	C23-003-1000	Valve Top, brass	1
6	C23-018-3100	Spring Disc, 28 x 12.2 x 1.5 mm	**
	C23-018-3101	Spring Disc, 28 x 12.2 x 1.0 mm	**
7	C23-023-1100	Plunger Assembly, 316 SST	1
	C23-023-1101	Plunger Assembly, SST, with tungsten carbide ball	1
	C23-023-1103	Plunger Assembly, 17-4 PH SST.....	1
	C23-023-1117	Plunger Assembly, Hastelloy C-276 ..	1
8	C23-013-2110	Seal, back-up, Buna	1
	C23-013-2117	Seal, back-up, UHMW polyethylene ...	1
	C23-013-2118	Seal, back-up, Teflon	1
9	C23-012-2110	Seal, Buna	1
	C23-012-2111	Seal, Viton	1
	C23-012-2113	Seal, EPDM	1
	C23-012-2115	Seal, urethane	1
10*	C23-016-2110	O-ring, sleeve, Buna	1
	C23-016-2111	O-ring, sleeve, Viton	1
	C23-016-2113	O-ring, sleeve, EPDM	1
11*	C23-024-1010	Sleeve, 316 SST	1
	C23-024-1017	Sleeve, Hastelloy C-276	1
12	C23-006-1000	Seat, 316 SST	1
	C23-006-1001	Seat, 17-4 HT	1
	C23-006-1002	Seat, tungsten carbide	1
	C23-006-1017	Seat, Hastelloy C-276	1
13	C23-010-2110	O-ring, valve seat, Buna	1
	C23-010-2111	O-ring, valve seat, Viton	1
	C23-010-2113	O-ring, valve seat, EPDM	1
14	C23-002-1000	Body, valve, brass, NPT	1
15	C23-011-2110	O-ring, Buna	1
	C23-011-2111	O-ring, Viton	1
	C23-011-2113	O-ring, EPDM	1
-	C23-022-2400	Name Plate (specify model & serial no.)	1

** See page 5 for spring disc quantities and arrangements.

C-23 Parts

C-23-AA
C-23-AB
C-23-AC

Stainless Steel Body
Nickel Alloy Body

Ref #	Part Number	Description	Quantity/ Pump
1	C23-004-1005	Adjusting Bolt, Pressure Range A	1
	C23-004-1006	Adjusting Bolt, Pressure Range B	1
	C23-004-1007	Adjusting Bolt, Pressure Range C	1
2	C23-005-1000	Jam Nut	1
3	D25-029-2010	Cap Screw, 3/8" x 1-1/4"	4
4	D10-048-2010	Lock Washer	4
5a	C23-003-1002	Valve Top, Nonwetted	1
6	C23-018-3100	Spring Disc, 28 x 12.2 x 1.5 mm	**
	C23-018-3101	Spring Disc, 28 x 12.2 x 1.0 mm	**
7	C23-023-1100	Plunger Assembly, 316 SST	1
	C23-023-1101	Plunger Assembly, SST, with tungsten carbide ball	1
	C23-023-1103	Plunger Assembly, 17-4 PH SST	1
7	C23-023-1117	Plunger Assembly, Hastelloy C-276	1
8	C23-013-2110	Seal, back-up, Buna	1
	C23-013-2117	Seal, back-up, UHMW polyethylene	1
	C23-013-2118	Seal, back-up, Teflon	1
9	C23-012-2110	Seal, Buna	1
	C23-012-2111	Seal, Viton	1
	C23-012-2113	Seal, EPDM	1
	C23-012-2115	Seal, urethane	1
10*	C23-011-2110	O-ring, sleeve, Buna	1
	C23-011-2111	O-ring, sleeve, Viton	1
	C23-011-2113	O-ring, sleeve, EPDM	1
11*	C23-024-1010	Sleeve, 316 SST	1
	C23-024-1017	Sleeve, Hastelloy C-276	1
12	C23-006-1000	Seat, 316 SST	1
	C23-006-1001	Seat, 17-4 HT	1
	C23-006-1002	Seat, tungsten carbide	1
	C23-006-1017	Seat, Hastelloy C-276	1
13	C23-010-2110	O-ring, valve seat, Buna	1
	C23-010-2111	O-ring, valve seat, Viton	1
	C23-010-2113	O-ring, valve seat, EPDM	1
14	C23-002-1002	Body, valve, 316 SST, NPT	1
	C23-002-1017	Body, valve, nickel alloy C series, NPT	1
15	C23-011-2110	O-ring, Buna	1
	C23-011-2111	O-ring, Viton	1
	C23-011-2113	O-ring, EPDM	1
-	C23-022-2400	Name Plate (specify model & serial no.)	1


** See page 5 for spring disc quantities and arrangements.

C-23-AE

Brass Body
Stainless Steel Body
Nickel Alloy Body

Ref #	Part Number	Description	Quantity/ Pump
1	C23-004-1008	Adjusting Bolt, Pressure Range E	1
2	C23-005-1000	Jam Nut	1
3	A04-041-2010	Cap Screw, 3/8" x 1-1/2"	4
4	D10-048-2010	Lock Washer	4
5c	C23-003-1003	Valve Top, brass, 2500 psi	1
6	C23-018-3100	Spring Disc, 28 x 12.2 x 1.5 mm	28
7	C23-023-1100	Plunger Assembly, 316 SST	1
	C23-023-1103	Plunger Assembly, 17-4 PH SST	1
	C23-023-1117	Plunger Assembly, Hastelloy C-276	1
8	C23-013-2110	Seal, back-up, Buna	1
	C23-013-2118	Seal, back-up, Teflon	1
9	C23-012-2110	Seal, Buna	1
	C23-012-2111	Seal, Viton	1
10*	C23-011-2110	O-ring, sleeve, Buna	1
	C23-011-2111	O-ring, sleeve, Viton	1
11*	C23-024-1010	Sleeve, 316 SST	1
	C23-024-1017	Sleeve, Hastelloy C-276	1
12	C23-006-1000	Seat, 316 SST	1
	C23-006-1001	Seat, 17-4 HT	1
	C23-006-1017	Seat, Hastelloy C-276	1
13	C23-010-2110	O-ring, valve seat, Buna	1
	C23-010-2111	O-ring, valve seat, Viton	1
14	C23-002-1000	Body, valve, brass, NPT	1
	C23-002-1002	Body, valve, 316 SST, NPT	1
	C23-002-1017	Body, valve, nickel alloy C series, NPT	1
15	C23-011-2110	O-ring, Buna	1
	C23-011-2111	O-ring, Viton	1
-	C23-022-2400	Name Plate (specify model & serial no.)	1

C-24 Parts

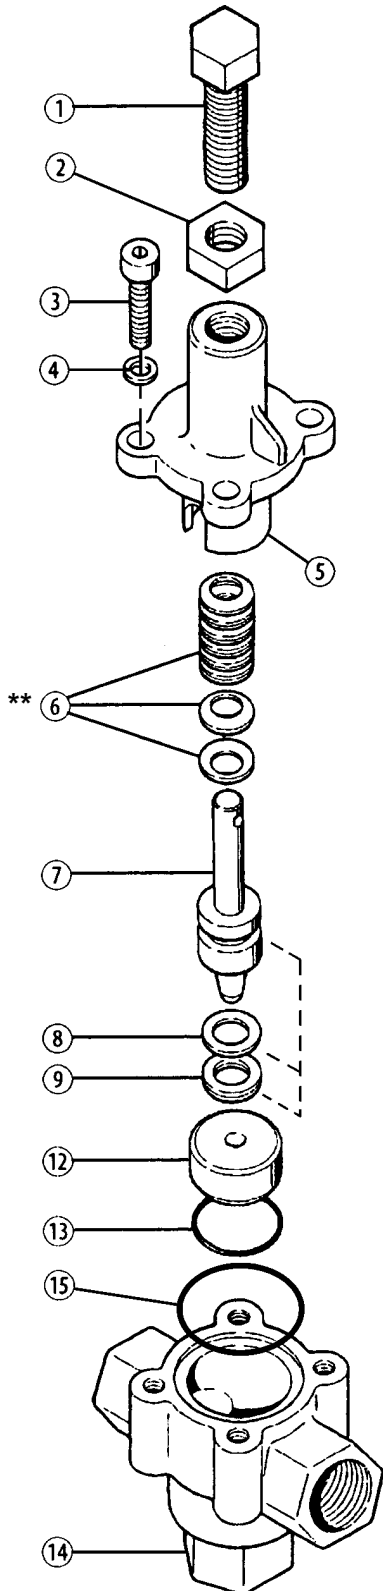

C-24-AA
C-24-AB
C-24-AC

Brass Body Stainless Steel Body Nickel Alloy Body

Ref #	Part Number	Description	Quantity/ Pump
1	C24-004-1005	Adjusting Bolt, Pressure Range A	1
	C24-004-1006	Adjusting Bolt, Pressure Range B	1
	C24-004-1007	Adjusting Bolt, Pressure Range C	1
2	C24-005-1000	Jam Nut.....	1
3	C24-015-2000	Cap Screw, 7/16 x 1-1/2"	4
4	C24-014-2000	Lock Washer, 7/16"	4
5	C24-003-1000	Valve Top, brass	1
	C24-003-1001	Valve Top, 316 SST	1
	C24-003-1002	Valve Top, nickel alloy C series	1
6	C24-018-3100	Spring Disc, 35.5 x 18.3 x 2.0 mm ...	**
	C24-018-3102	Spring Disc, 35.5 x 18.3 x 1.2 mm ...	**
7	C24-023-1100	Plunger Assembly, 316 SST	1
	C24-023-1101	Plunger Assembly, SST, with tungsten carbide ball	1
	C24-023-1102	Plunger Assembly, Hastelloy C-276 ..	1
8	C24-023-1103	Plunger Assembly, 17-4 PH SST	1
	C24-013-2110	Seal, back-up, Buna	1
	C24-013-2118	Seal, back-up, Viton	1
9	C24-012-2110	Seal, Buna	1
	C24-012-2111	Seal, Viton,	1
	C24-012-2113	Seal, EPDM	1
12	C24-006-1000	Seat, 316 SST	1
	C24-006-1001	Seat, 17-4 HT	1
	C24-006-1002	Seat, tungsten carbide	1
	C24-006-1003	Seat, Hastelloy C-276	1
13	C23-010-2110	O-ring, valve seat, Buna	1
	C23-010-2111	O-ring, valve seat, Viton	1
	C23-010-2113	O-ring, valve seat, EPDM	1
14	C24-002-1000	Body, valve, brass, NPT	1
	C24-002-1001	Body, valve, 316 SST, NPT	1
	C24-002-1002	Body, valve, nickel alloy C series, NPT	1
15	C24-011-2110	O-ring, Buna	1
	C24-011-2111	O-ring, Viton	1
	C24-011-2113	O-ring, EPDM	1
-	C24-022-2400	Name Plate (specify model & serial no.)	1

** See page 5 for spring disc quantities and arrangements.

Repair

The valve can generally be repaired in place, without removing it from the system.

When disassembling, note the number of spring discs and their arrangement. They must be reinstalled in the same arrangement (refer also to page 5 — note that they are stacked, either singly or in pairs, facing in alternate directions). When reassembling, apply liberal amounts of high-temperature regulator grease (Wanner #A01-115-3400) on the springs and around the plunger stem.

The seal (9) and back-up seal (8) must be replaced together; don't replace one without replacing the other.

Troubleshooting

Excess Pressure Required to Bypass Fluid

- Regulating valve pressure not properly adjusted
- Not enough fluid being continuously bypassed
- Nozzles worn

Fluid Leaking from Hole in Valve Top

- Worn Seals

System Losing Pressure

- Nozzles worn
- Pump RPM reduced
- Regulating valve pressure not properly adjusted
- Worn pump components
- Worn regulating valve seat or plunger
- System drawing in air
- Too much fluid being bypassed

Pressure Spikes

- Minimum bypass of 10% not being maintained
- Nozzles worn
- Regulating valve pressure not properly adjusted

Limited Warranty

Wanner Engineering, Inc. extends to the original purchaser of equipment manufactured by it and bearing its name, a limited one-year warranty from the date of purchase against defects in material or workmanship, provided that the equipment is installed and operated in accordance with the recommendations and instructions of Wanner Engineering, Inc. Wanner Engineering, Inc. will repair or replace, at its option, defective parts without charge if such parts are returned with transportation charges prepaid to Wanner Engineering, Inc., 1204 Chestnut Avenue, Minneapolis, Minnesota 55403.

This warranty does not cover:

1. The electric motors (if any), which are covered by the separate warranties of the manufacturers of these components.
2. Normal wear and/or damage caused by or related to abrasion, corrosion, abuse, negligence, accident, faulty installation or tampering in a manner which impairs normal operation.
3. Transportation costs.

This limited warranty is exclusive, and is in lieu of any other warranties (express or implied) including warranty of merchantability or warranty of fitness for a particular purpose and of any noncontractual liabilities including product liabilities based on negligence or strict liability. Every form of liability for direct, special, incidental or consequential damages or loss is expressly excluded and denied.



WANNER ENGINEERING, INC.

1204 Chestnut Avenue, Minneapolis, MN 55403
TEL: (612) 332-5681 FAX: (612) 332-6937
TOLL-FREE FAX [US only]: (800) 332-6812

www.hydra-cell.com
email: sales@wannereng.com
Document Fax Back System: (510) 745-0440

C22-991-2400 Rev. B

©2002 Wanner Engineering, Inc. Printed in USA 02/02