






**IWAKI WALCHEM Corporation**

# MDF-L5010

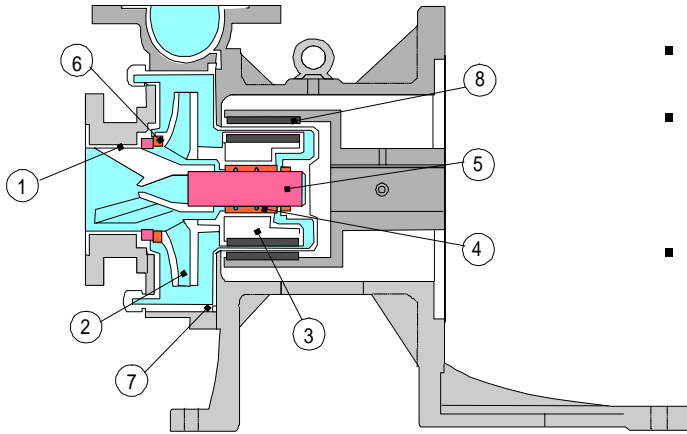

- Compact close-coupled design
- Corrosion resistant ETFE internals
- Precision injection molded, individually replaceable, liner, impeller and magnet capsule
- Rifled bearing and grooved thrust surfaces enhances fluid flow through bearing system

Part	Material	
	CF	AA
1 Casing	20% Carbon reinforced fluoroplastic ETFE	
2 Impeller		
3 Magnet Capsule		
4 Bearing	High density carbon	99.8% Alumina ceramic
5 Spindle, Liner ring	99.8% Alumina ceramic	
6 Mouth ring	Rulon	
7 O-ring	FKM / EPDM / AFLAS	
8 Drive magnet	Ferrite for 657 & smaller Samarium Cobalt for 6510 & larger	

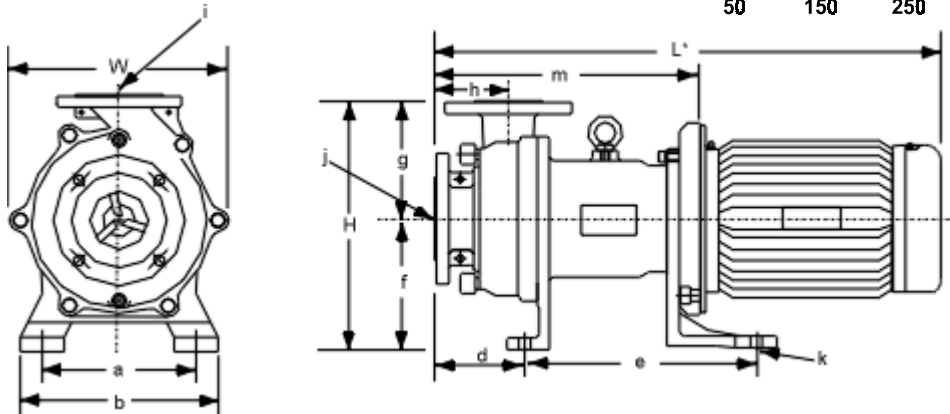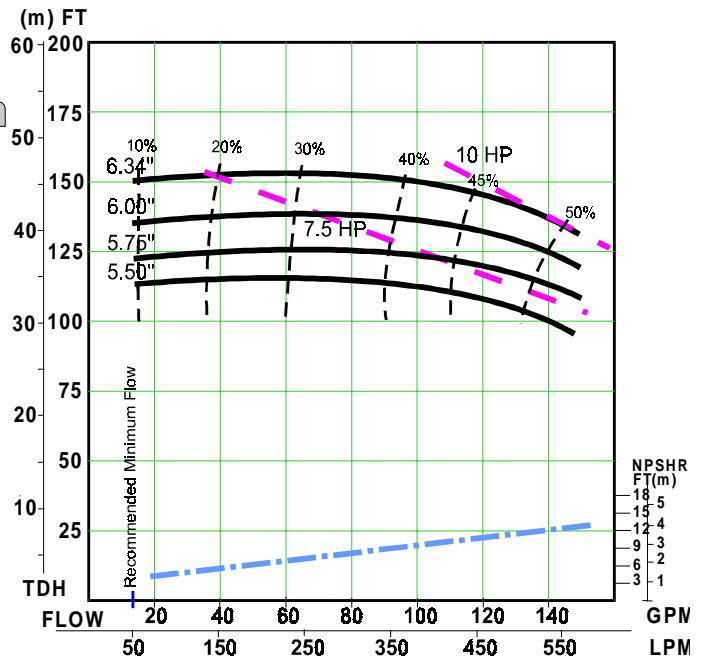

**Dimensions (inches) and Specifications**

\* Will vary by motor manufacturer

a	b	d	e	f	g	h	i	j	m	k	W	H	L
8.7"	11"	3.5"	14.4"	7.1"	6.3"	3.1"	2"	2.5"	15.8"	0.55"	11.8"	13.4"	29.6"
<b>Connection Sizes</b>		<b>Min Flow/Max Head</b>		<b>Standard Capacity</b>		<b>Max Capacit</b>		<b>Motor/Frame</b>		<b>Pump Weigh</b>			
2.5 x 2		13.2 GPM/ 150 ft.		150 GPM/ 137 ft.		150 GPM		10 HP/215TC		132 lbs.			