






**IWAKI WALCHEM Corporation**

# MDF-L6520

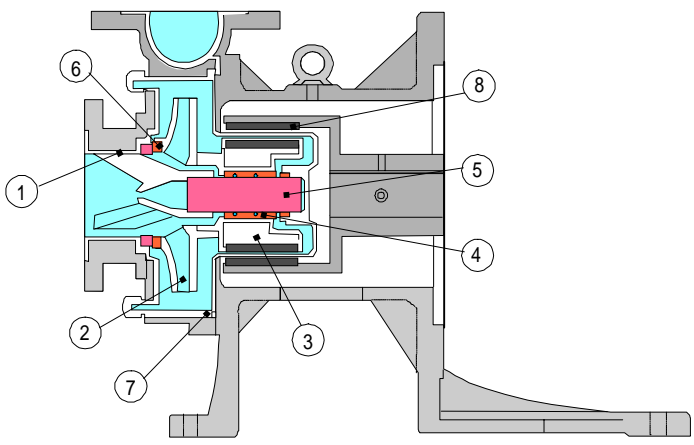

- Compact close-coupled design
- Corrosion resistant ETFE internals
- Precision injection molded, individually replaceable, liner, impeller and magnet capsule
- Rifled bearing and grooved thrust surfaces enhances fluid flow through bearing system

Part	Material	
	CF	AA
1 Casing	20% Carbon reinforced fluoroplastic ETFE	AA
2 Impeller		
3 Magnet Capsule		
4 Bearing	High density carbon	SiC
5 Spindle, Liner ring	99.8% Alumina ceramic	SiC
6 Mouth ring	Rulon	
7 O-ring	FKM / EPDM / AFLAS	
8 Drive magnet	Ferrite for 657 & smaller Samarium cobalt for 6510 & larger	

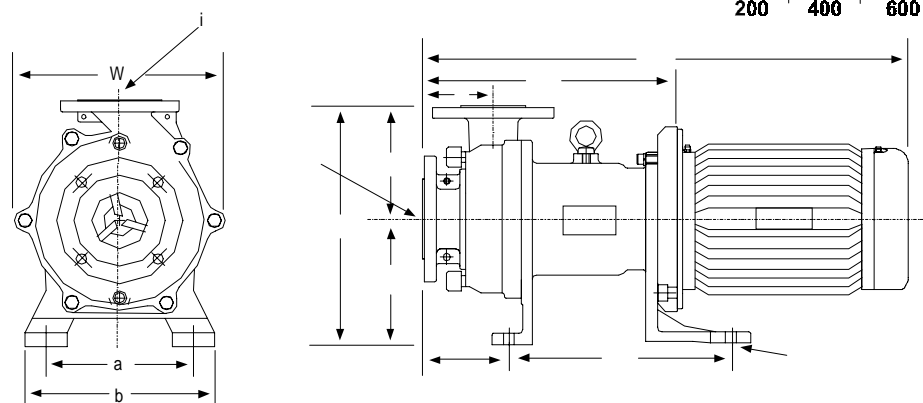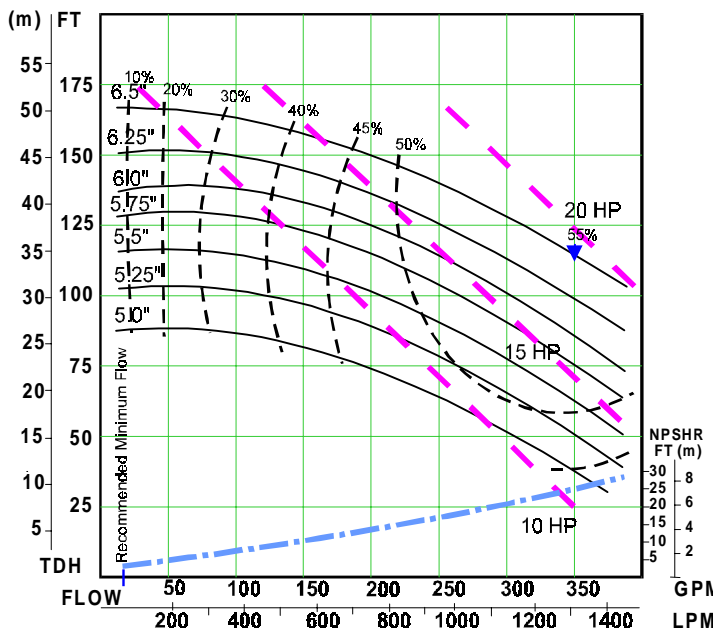

**Dimensions (inches) and Specifications**

*\* Will vary by motor manufacturer*

a	b	d	e	f	g	h	i	j	m	k	W	H	L
8.7"	11"	4.3"	17.7"	9.0"	7.1"	3.94"	2.5"	3"	16.9"	0.55"	11.8"	14.2"	34.3"
<b>Connection Sizes</b>		<b>Min Flow/Max Head</b>		<b>Standard Capacity</b>		<b>Max Capacity</b>		<b>Motor/Frame</b>		<b>Pump Weight</b>			
3 x 2.5		13.2 GPM/ 165 ft.		350 GPM/ 113 ft.		380 GPM		20 HP/256TC		154 lbs.			