
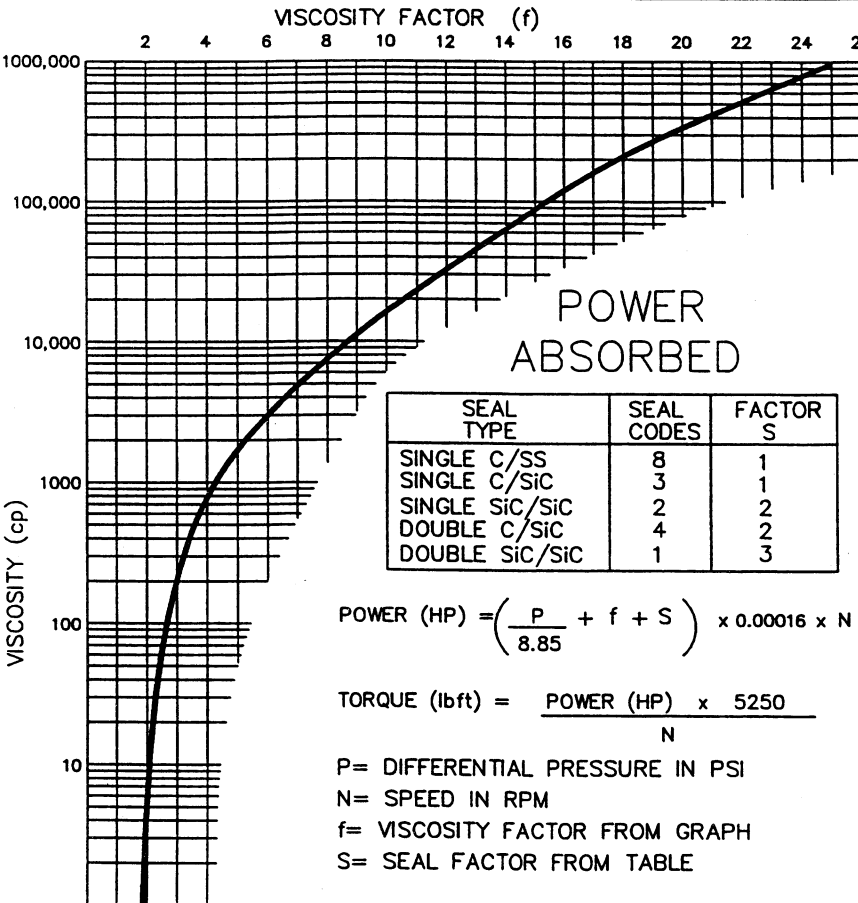


SIZE: 42

SEAL TYPES: ALL

POLISH: 0,Y

ROTORS CODE: 8

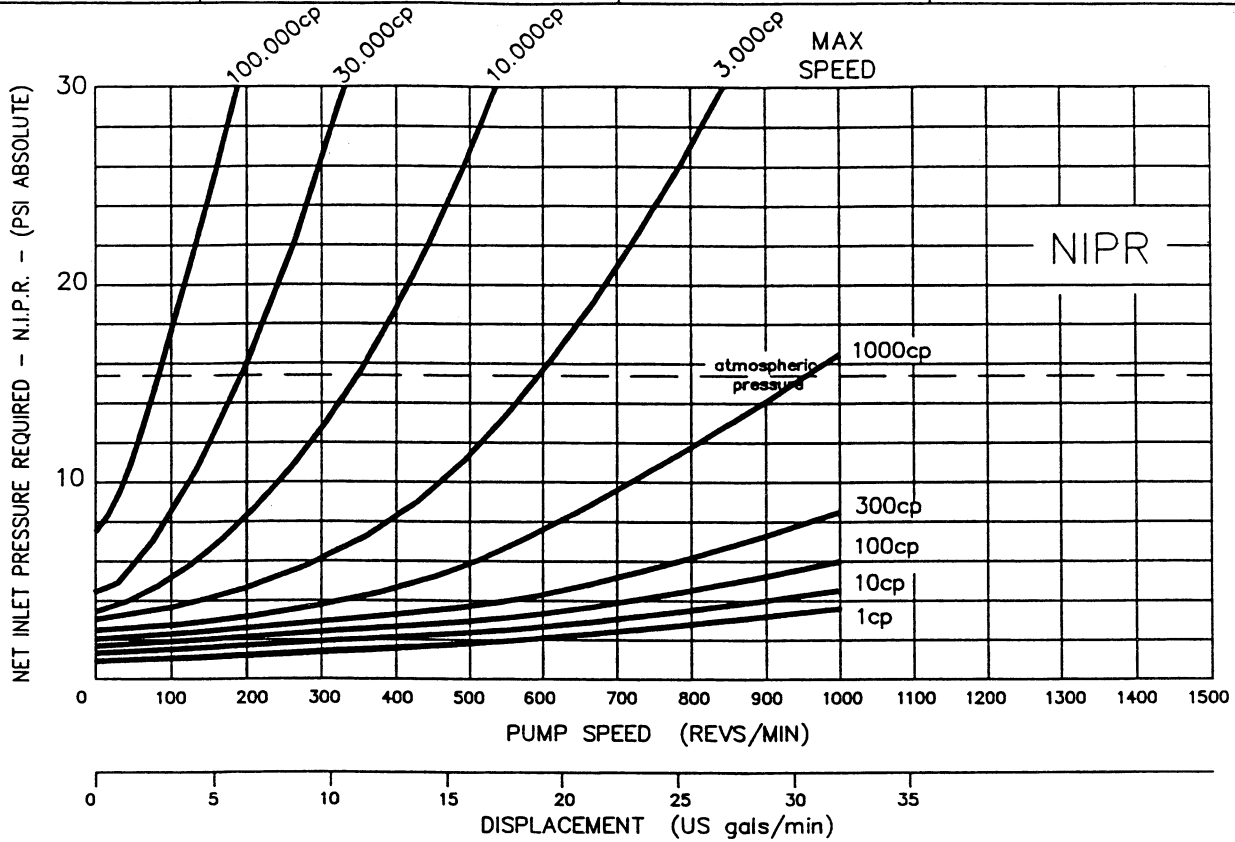

APPLICATION DATA

MAX INPUT SHAFT TORQUE (lbft) 44  
 MAX SHAFT RADIAL LOAD (lb) 63  
 MAX SOFT PARTICLE DIA (in) 0.4  
 DISPLACEMENT (cubic in/rev)  
 DISPLACEMENT (US gals/100revs)

PHYSICAL DATA

PUMP WEIGHT HY~LINE (lb) 40  
 PUMP WEIGHT ULTIMA (lb) 51  
 OIL CAPACITY (cubic in) 61  
 HOLD UP VOLUME (cubic in) 6.5

TIGHTENING TORQUES (lbft)

END COVER BOLTS (123) 15  
 ROTOR RETAINER SCREWS (HY~LINE)(59) 40  
 ROTOR CASE SCREWS (52) 7  
 GEAR COVER SCREWS (18) 6  
 GEAR NUTS (8) 37  
 ROTOR TIE ROD NUTS (ULTIMA)(26&27)15

ROTOR CLEARANCES (in)

FRONT, ROTOR TO END COVER 0.003  
 RADIAL, ROTOR TO ROTOR CASE 0.003  
 MESH, LOBE TO LOBE - MIN 0.003

Jabsco



ITT Industries

USA Jabsco  
 1485 Dale Way  
 Costa Mesa  
 CA 92628-2158  
 Tel: +1 714 545 8251  
 Fax: +1 714 957 0609

UK Jabsco  
 Bingley Road  
 Hoddesdon  
 Hertfordshire, EN11 0BU  
 Tel: +44 (0) 1992 450 145  
 Fax: +44 (0) 1992 467 132

GERMANY Jabsco GmbH  
 Oststraße 28  
 22844 Norderstedt  
 Tel: +49 (0) 40 53 53 73 0  
 Fax: +49 (0) 40 53 53 73 11