


DIFFERENTIAL PRESSURE (PSI)

SIZE: 74


SEAL TYPES: ALL

POLISH: O,Y

ROTORS CODE: 9

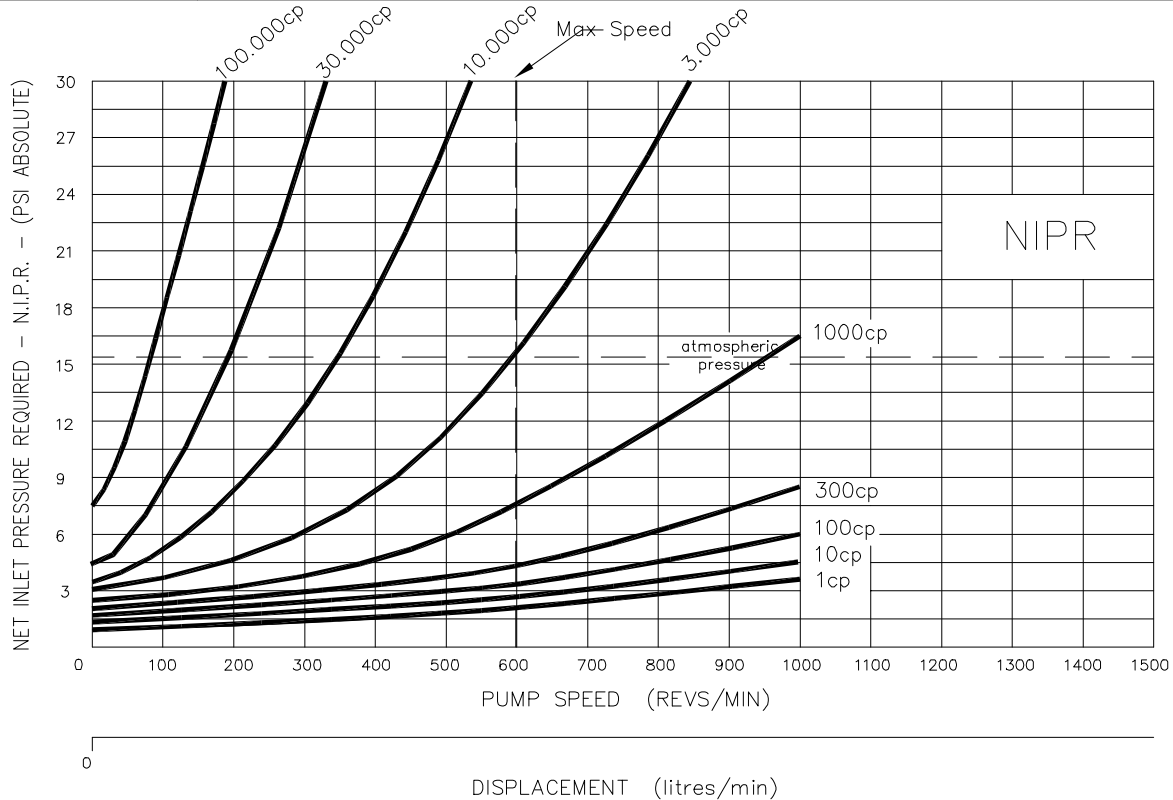

DISPLACEMENT (litres/min)

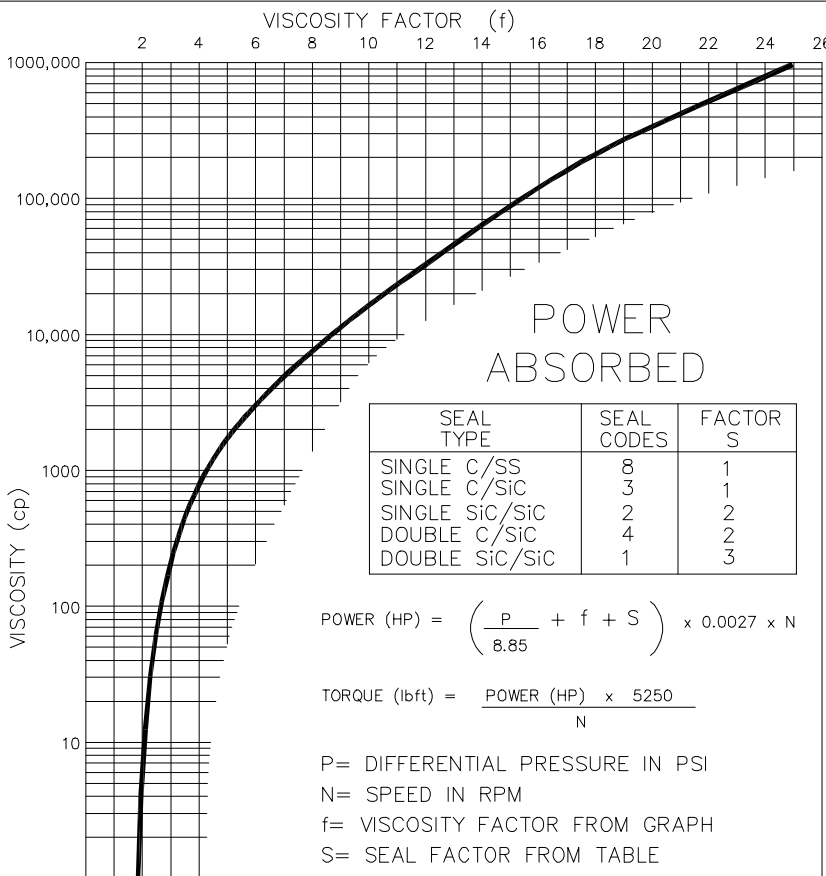

APPLICATION DATA

MAX INPUT SHAFT TORQUE(lbft) 487  
 MAX SHAFT RADIAL LOAD (N)  
 MAX SOFT PARTICLE DIA (in) 1.77  
 DISPLACEMENT (cubic in/rev) 125  
 DISPLACEMENT (US gals/100revs) 54

PHYSICAL DATA

PUMP WEIGHT HY~LINE (lb) 320  
 PUMP WEIGHT ULTIMA (kg) N/A  
 OIL CAPACITY (cubic in) 317.3  
 HOLD UP VOLUME (cubic in) 43

TIGHTENING TORQUES (lbft)

END COVER BOLTS 15  
 ROTOR RETAINER SCREWS (HY~LINE) 37  
 ROTOR CASE SCREWS 37  
 GEAR COVER SCREWS 11  
 GEAR NUTS 111  
 HYGIENIC CAP 29.5

ROTOR CLEARANCES (in)

FRONT, ROTOR TO END COVER 0.009  
 RADIAL, ROTOR TO ROTOR CASE 0.023  
 MESH, LOBE TO LOBE - MIN 0.023