

**Models 30200-0050, 34600-0031
36600-0031, 36680-2031
36800-1031, 36900-1031
36950-2031**

**115 Vac Water Pressure Pumps
115 Vac Replacement Motor
115 Vac Bilge Pumps
115 Vac Rectified Motor
Assembly**

APPLICATION

These Jabsco 115 Vac water system pumps and bilge pumps function just as their standard dc counterparts but are designed with a rectifier in their electrical system which allows them to be powered by 115 Vac. The function of the rectifier is to convert alternating into direct current in order to power an economical compact totally enclosed 115 Vdc motor. The rectifier and motor have been installed on three of our most popular pressure pumps with flow ranging from 3 GPM to 4.2 GPM.

NOTE: NOT RECOMMENDED FOR CONTINUOUS DUTY.


INSTALLATION AND WIRING

Because these pumps are the same design as their dc counterparts, installation should not be different. Convenience to 115 Vac power is the only consideration you will have to provide for.

WIRING

Shown below is the wiring for pumps. A 3 amp fuse must be installed on the open lead coming from the pressure switch.

WARNING
 Fire Hazard. Failure to use proper size fuse can cause motor to overheat. Fire can result causing property damage, personal injury or death.

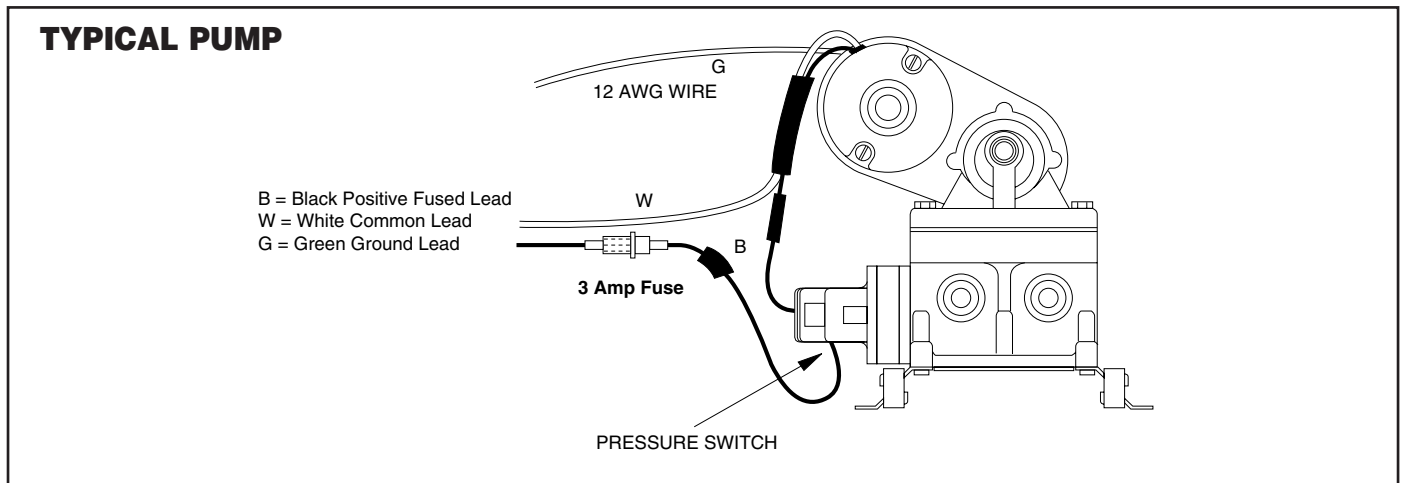

These pumps with 115 Vac rectified motors meet USCG Regulation 183.410 and ISO 8846 MARINE for Ignition Protection.

Replacement motor: Part No. 30200-0050 is the replacement motor assembly, complete with rectifier in-line.

Jabsco



ITT Industries
Engineered for life

U.S.A.
Jabsco
20 Icon
Foothill Ranch, CA 92610-3000
Tel: (714) 545-8251
Fax: (714) 957-0609

UNITED KINGDOM
Jabsco
Bingley Road, Hoddesdon
Hertfordshire EN11 OBU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

CANADA
Fluid Products Canada
55 Royal Road
Guelph, Ontario N1H 1T1
Tel: (519) 821 -1900
Fax: (519) 821-2569

JAPAN
NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222
Tel: 045-4758906
Fax: 045-475-8908

GERMANY
Jabsco GmbH
Oststrasse 28
22844 Norderstedt
Tel: +49-40-53 53 73 -0
Fax: +49-40-53 53 73 -11