

AQUA VOID AUTO - CARTRIDGE BILGE PUMP

FEATURES	BENEFITS	COMPETITIVE ADVANTAGES
High Flow Impeller Design	Heightened Efficiency and an Increased Flow Rate	Most Efficient and Highest Flow in GPH Capacity Category
Quick-Change Motor Connection	Enjoy Quick and Hassle-Free Cartridge Motor Changes or Capacity Upgrades	Industry First and Only Cartridge Motor Pump with included harness connection requiring no cutting and splicing of wires
Switchless Automatic Bilge Pump with Low Amp Resistance Monitoring	Automatically Monitors the Presence of Water through Low Amp Draw Impeller Spin (Spin Sense)	15 Months of Service Before Critical Battery Draw Down*
Smaller Profile than Pumps with Switches	For Tighter Fit in Smaller Spaces	Smaller than Traditional Sensing Automatic Bilge Pumps
Durable Thermoplastic Housing Design Commonality with Removable Motor Cartridge	Common Body Allows Interchangeable Motor Cartridge Replacement to the Same or Different Size	
Straight or 90-Degree Dura Port Discharge Ports with included Check Valve	Allow Multi-Directional Hose Routing and Eliminate Stress Cracking without Disengaging Hoses or Removing Pump, and Reduces Cycling from Water Back Flow	
Water-Cooled Motor, 316 Stainless Steel Shaft and Permanently Lubricated Double Bearings	Corrosion Resistant and Extended Life	
Clip-In Basket	Ease of Installation & Maintenance	
AVAILABLE SIZES 500 GPH 12V 800 GPH 12V		

*Time to draw down 54Ah-battery with a 20% safety factor included 15 months.



TECHNICAL SPECIFICATIONS

Aqua Void Auto - Cartridge Bilge Pump

PART NUMBER	PUMP SIZE	DESCRIPTION	CAPACITY STRAIGHT (12V)		VOLTAGE	AMP	FUSE SIZE	HOSE CONN.
			GPH	L/MIN				
10-13626-03	500 GPH	Aqua Void Auto - Cartridge Bilge Pump	600	38	12V	2.7A	3.5 A	3/4"
10-13626-07	800 GPH	Aqua Void Auto - Cartridge Bilge Pump	795	50	12V	3.7A	5 A	3/4"

Pump Dimensions

PUMP SIZE	DESCRIPTION	WIDTH (A)	HEIGHT (B)	LENGTH (C)	WEIGHT
500 GPH	Aqua Void Auto - Cartridge Bilge Pump	70mm (2.75")	119mm (4.69")	133mm (5.24")	0,32kg (11.2oz)
800 GPH	Aqua Void Auto - Cartridge Bilge Pump	70mm (2.75")	119mm (4.69")	133mm (5.24")	0,36kg (12.6oz)


Dimensions include straight fitting installed.

Standard Features: All Cartridge Pumps

BODY	ABS	DURA PORT	PA66/GF - Nylon
SHAFT	316 Stainless Steel	SHAFT SEAL	Nitrile Rubber
MOTOR CARTRIDGE	PC-ABS	WIRE SIZE	16 GA, TINNED

Cartridge Motor: Replacement Cartridge

PART NUMBER	PUMP SIZE	DESCRIPTION
09-36336-04	500 GPH	Aqua Void Auto Replacement Cartridge Motor
09-36336-10	800 GPH	Aqua Void Auto Replacement Cartridge Motor

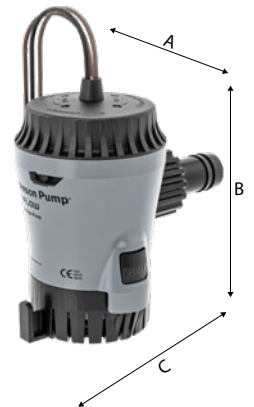

SPXFLOW®

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. The green "®" is a trademark of SPX FLOW, Inc.

For more information, visit www.spxflow.com/johnson-pump-marine

©2024 SPX FLOW, Inc.
JPM_AV-Auto_FLR_GB

Version: 04/2024