


8 SERIES



Features


- Cast bronze or cast iron pump housing with protective epoxy coating for corrosion resistance
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- 4/10 HP Shaded Pole Motor
- Stainless steel fasteners
- Mechanical seal (stainless steel spring, nitrile parts, carbon and ceramic faces) to assure maximum protection against pump failure
- Bearings: Upper and lower sintered sleeve bearings for extended motor life
- Thermal overload protection
- Manual and automatic models
- Automatic operation with pressure switch activates pump when water level is between 7 and 10 . Pump shuts off when water level falls to between 1 and 4 (Pressure switch is non-adjustable)

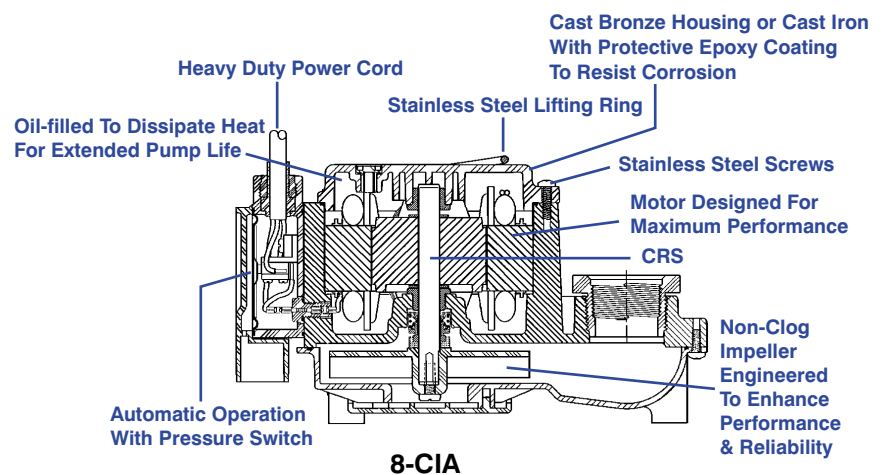


For residential and light commercial use, the Model 8 Series sump pumps provide efficient and reliable service. For extended or continuous use in moving large volumes of water, these pumps feature a 1-1/2" discharge with a maximum lift of 22.9', a polycarbonate cover and a polypropylene volute/base. A choice of manual or automatic versions provides user with the right pump for their needs.

Little Giant Pump Co.

8 SERIES SUMP PUMPS

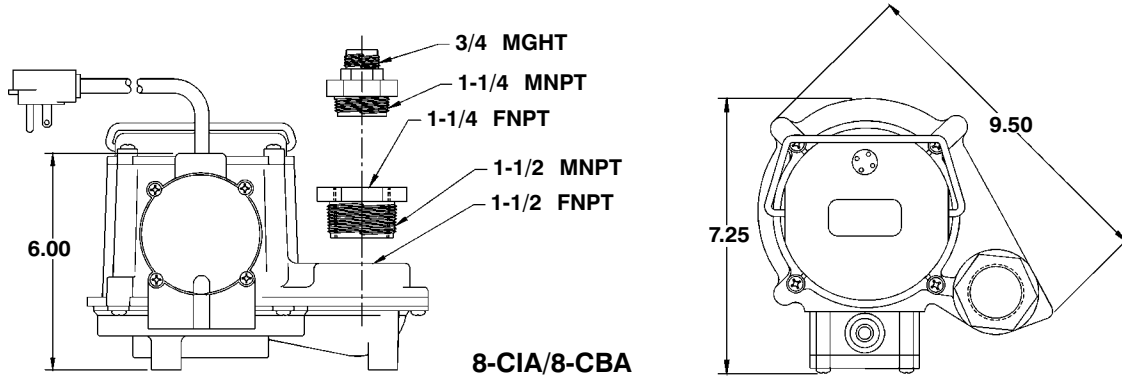

8-CIA/8-CBA

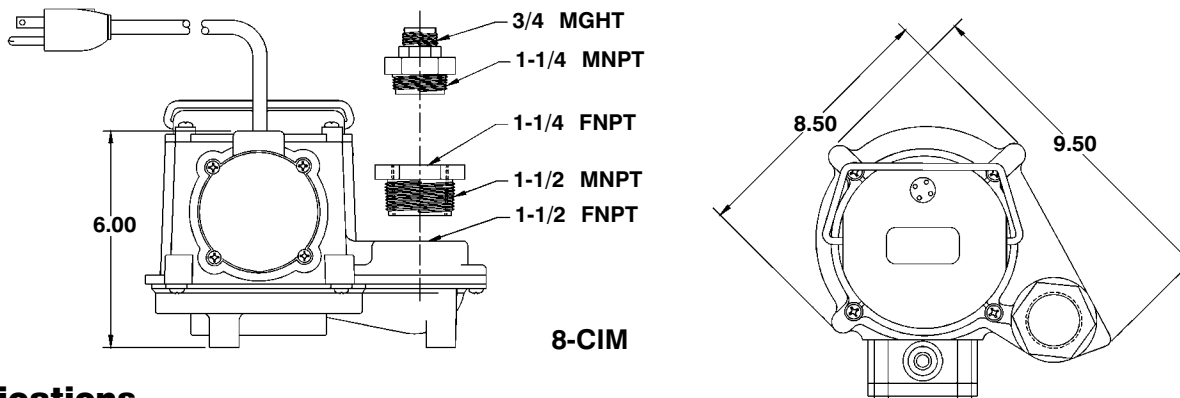

8-CIM


Specifications

MODEL NO.	ITEM NO.	LISTING	HP	VOLTS	AMPS S/R	WATTS	FLOW (GPM@HEAD)			SHUTOFF HEAD (FT.)		PWR. CRD. (FT.)	WEIGHT (LBS.)	DIMENSIONS (H x L x W) (IN.)
							5	10	15	HEAD (FT.)	P.S.I.			
8-CIM	508057	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	10	18.80	6.00 x 9.50 x 8.50
8-CIM	508058	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	25	19.80	6.00 x 9.50 x 8.50
8-CBM	508257	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	10	21.00	6.00 x 9.50 x 8.50
8-CBM	508267	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	25	22.00	6.00 x 9.50 x 8.50
8-CIA	508157	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	10	19.00	6.00 x 9.50 x 8.50
8-CIA	508158	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	25	20.30	6.00 x 9.50 x 8.50
8-CBA	508357	UL/CSA	4/10	115	17.5/10	830	54	42	26	22.9	9.9	10	21.30	6.00 x 9.50 x 8.50

CIM/CBM - Manual

CIA/CBA - Automatic

All models are 60 Hz.

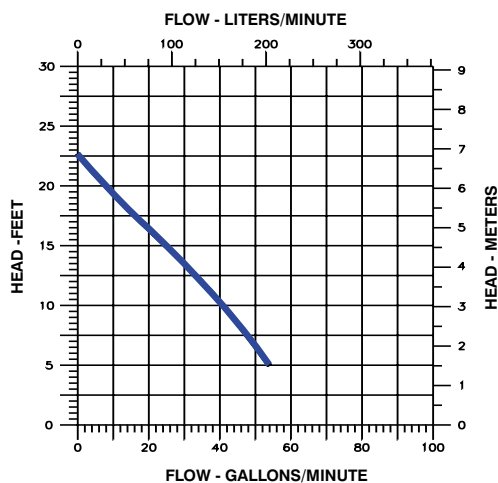

Construction

Motor Housing	Epoxy-coated Cast Iron (CI) or Cast Bronze (CBM and CBA Models)
Impeller Material	Polypropylene
Impeller Type	Non-Clog
Volute	Polypropylene
Power Cord	18-3, SJTW
Mechanical Shaft Seal	Nitrile with Carbon & Ceramic Faces
Fasteners	Stainless Steel
Shaft	CRS
Bearings	Upper and lower: Sintered, Iron, Flanged Sleeve



ISO 9001 CERTIFIED

Little Giant Pump Co.

PO Box 12010
Okla. City, OK 73157

Phone: 405.947.2511
Fax: 405.951.5674

www.LittleGiantPump.com

Form No. 995209 - 10/99