


Eliminator Series Sewage Ejector Pump


95 SERIES




For residential, medium commercial and agricultural, and light industrial applications, the Model 9S Series Wastewater and Sewage Ejector pumps feature a 2" discharge, with a maximum lift of 18'. Cast iron housing and volute have a protective epoxy coating.

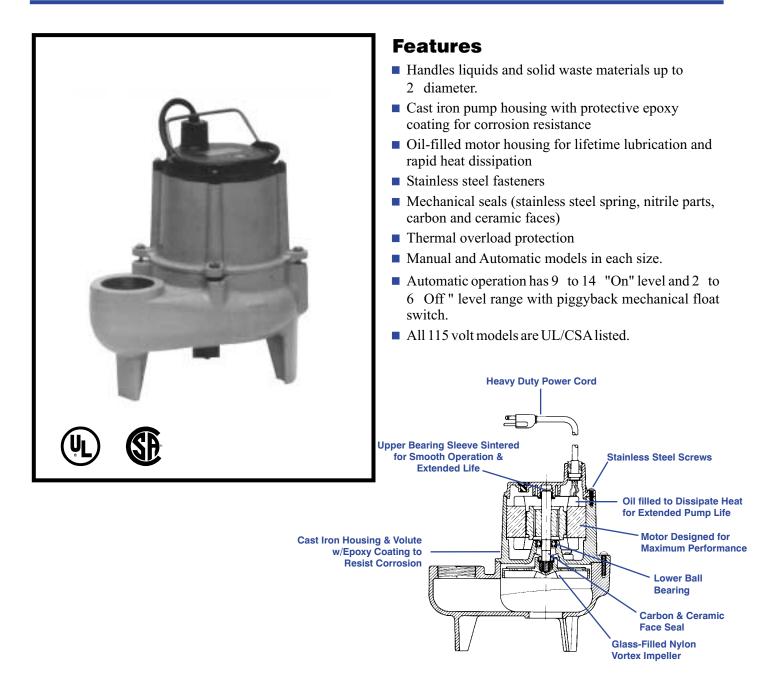

95 SERIES SEWAGE PUMP






Specifications

MODEL	ITEM NO.				SOLIDS SIZE	RUNNING	PERFORMANCE (GPM @ HEAD)				SHUTOFF		PWR. CRD. WEIGHT DIMENSIONS		
NO.		LISTING	HP	VOLTS	(Dia. In.)	AMPS/WATTS	5'	10'	`15 '	20'	(Ft.)	P.S.I .	(Ft.)	(Lbs.)	(H x L x W in.)
9S-CIM	509400	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	15	36	11.6 x 10.3 x 6.8
9S-CIA-RFS	509500	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	15	36	11.6 x 10.3 x 6.8
9S-CIM	509450	_	4/10	230	2"	6.5/1020	80	50	16	_	18	7.8	15*	36	11.6 x 10.3 x 6.8
9S-CIA-RFS	509520	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	20	37	11.6 x 10.3 x 6.8
9S-CIA-RFS*	509510	UL/CSA	4/10	115	2"	13/1020	80	50	16	—	18	7.8	15	37	11.6 x 10.3 x6.8
*3" discharge	arge RFS - Piggyback Mechanical Float Switch										* w/out plug				

*3" discharge RFS - Piggyback Mechanical Float Switch



115V 60Hz

Construction

Cover	Nylon						
Motor Housing	Epoxy Coated Cast Iron						
Impeller Material	Nylon						
Impeller Type	Vortex						
Volute	Epoxy Coated Cast Iron						
Power Cord	SJTW						
Mechanical Shaft Seal	Nitrile with carbon and ceramic faces						
Fasteners	Stainless Steel						
Shaft	Steel						
Bearings	Upper sintered sleeve and						
	lower ball bearing						



ISO 9001 CERTIFIED

Little Giant Pump Co. PO Box 12010 Phone: 405.947.2511

Okla. City, OK 73157 Fax: 405.228.1550 www.LittleGiantPump.com (A) Form No. 994342 - 11/99