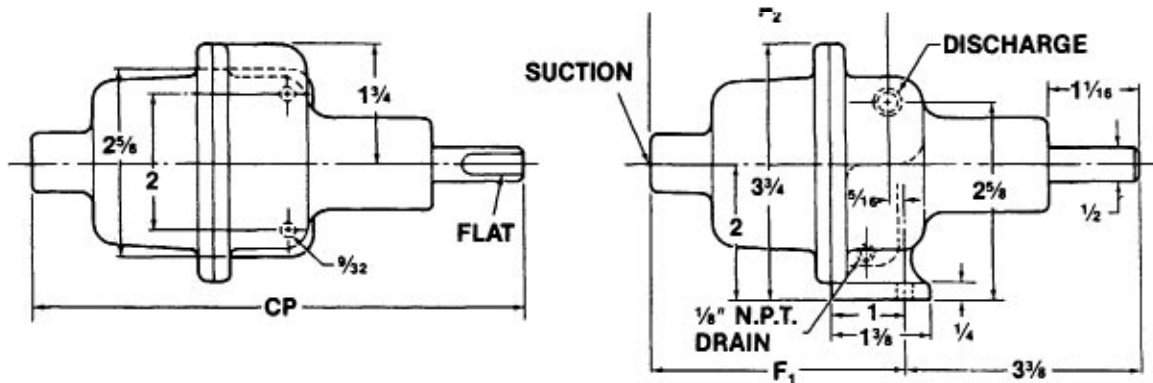


SPECIFICATION DATA  
**MOYNO® 500 PUMPS**  
**200 SERIES**  
203, 204, 205, 220, AND 232 MODELS

**DIMENSIONS**

**PORT SIZES**

MODELS	CP	F <sub>1</sub>	F <sub>2</sub>	SUCTION	DISCHARGE
20501, 22001	6 <sup>11/16</sup>	3 <sup>5/16</sup>	3 <sup>3/8</sup>	3/8 NPT	3/8 NPT
20302, 20402, 20502, 22002	7 <sup>1/16</sup>	3 <sup>11/16</sup>	3 <sup>3/8</sup>	3/8 NPT	3/8 NPT
23201, 23203	8 <sup>3/16</sup>	4 <sup>13/16</sup>	4 <sup>1/2</sup>	1/2 NPT	1/2 NPT






All dimensions are in inches.  
Specifications subject to change without notice.

**MATERIALS OF CONSTRUCTION**

COMPONENT	MODELS			
	20501, 22001	20302, 20402, 20502, 22002	23201	23203
Housing	Aluminum	316 SS	Aluminum	316 SS
Rotor	Phenolic	316 SS	416 SS/CP*	316 SSICP*
Stator	NBR (Nitrile)	NBR (Nitrile)	NBR (Nitrile)	NBR (Nitrile)
Weight (lbs)	3	5	3	6

\*CP =Chrome plated

# PERFORMANCE (Water at 70°F)

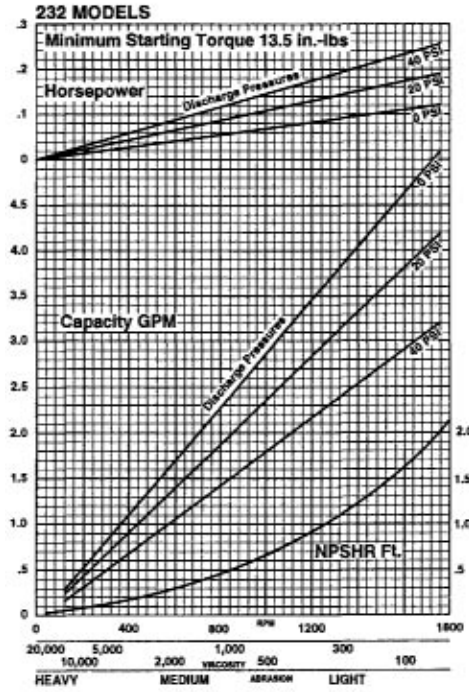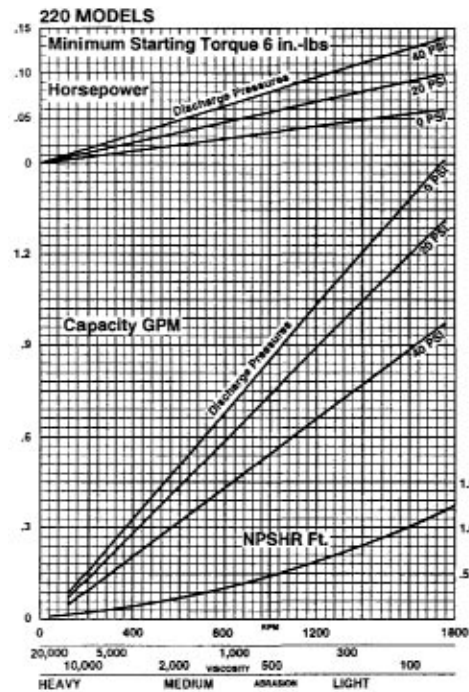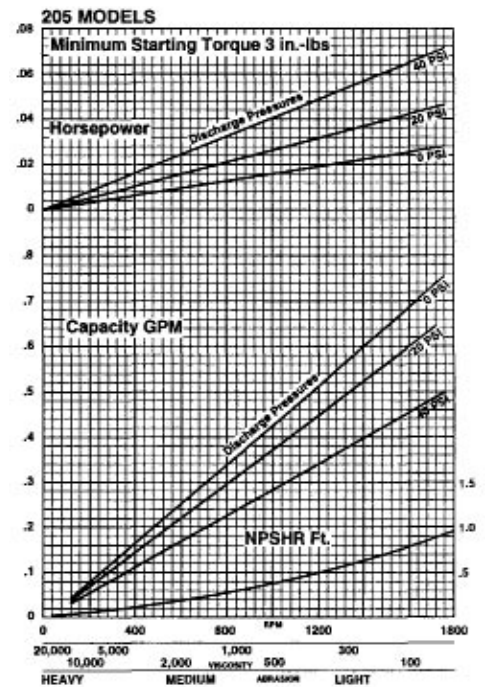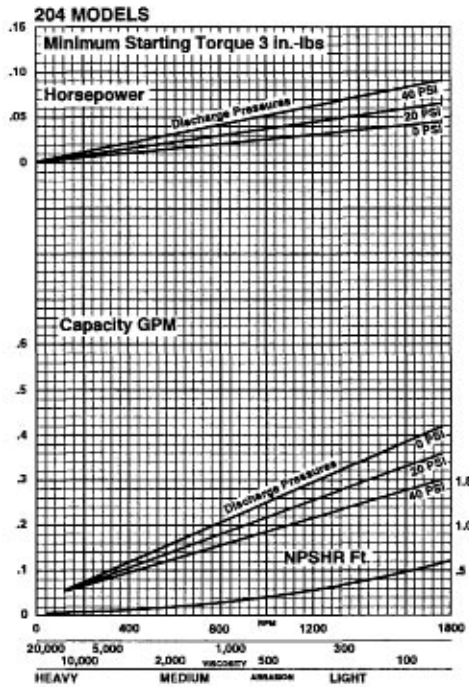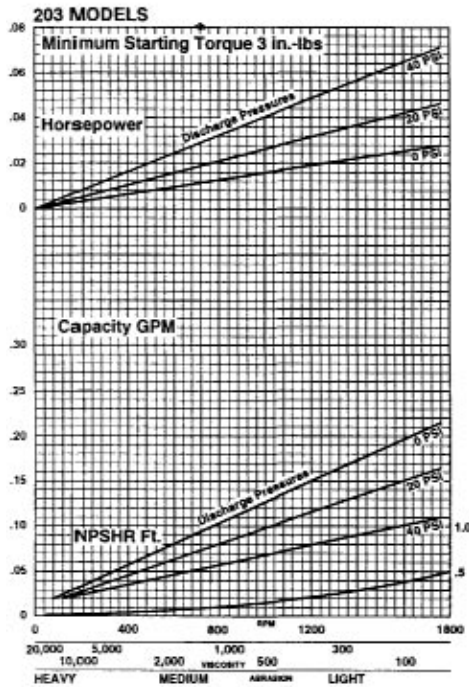

**NOTE: For fluids with viscosity over 200 CP (1000 SSU), pump capacity is reduced by 20%.**