


## Features & Options

- 1" X 3/4" CENTRIFUGAL PUMP
- CLOSE COUPLED TO ELECTRIC MOTOR
- OR PUMPAK ONLY TO MOUNT TO STANDARD NEMA "C" FACE MOTOR .3HP, .5HP, .75HP, 1HP
- FLOWS TO 40 GPM
- PRESSURES TO 40 FEET HEAD
- AVAILABLE IN: CAST IRON, BRONZE OR ALUMINUM CONSTRUCTION
- VERTICAL OR HORIZONTAL DISCHARGE
- WITH OR WITHOUT ELECTRIC MOTOR
- IMPELLER—CAST IRON, BRONZE OR ALUMINUM—SEMI-OPEN
- SHAFT SLEEVE—STAINLESS STEEL WITH 5/8" SHAFT
- FASTENERS—STAINLESS STEEL
- SEALS—STANDARD VITON, OPTIONAL SEALS AVAILABLE (CONSULT FACTORY)
- OPTIONS: —ENGINE DRIVES  
—PEDESTAL MODELS  
—HYDRAULIC DRIVES  
—CLUTCHPAKS

### DIMENSIONS

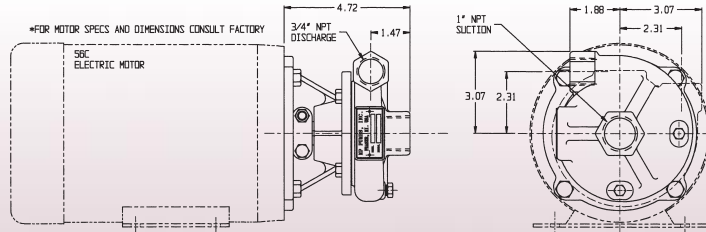

### Pump Performance Curves

