

CHEMFLO⁹


Centrifugal Pumps

Features & Options

- SIZE: 2" x 1" x 10"
- All Cast 316SS Housing, Seal Housing And Impeller
- 316SS Pedestal Shaft Or Motor Shaft Sleeve
- Standard – Type 2100 Carbon/Ceramic/Viton Seal
- Standard – Viton O-Ring
- Enclosed Impeller
- Flow Rates To 275 GPM
- Pressures To 460'
- Optional: Tap For Recirculation Or Seal Flush
- Optional: Severe Duty Seals
- Available: Pedestal Pump
- Available: Pumpak For 145TC, 184TC, 215TC, 254TC
And 286TSC Close-Couple Electric Motor



Dimensions

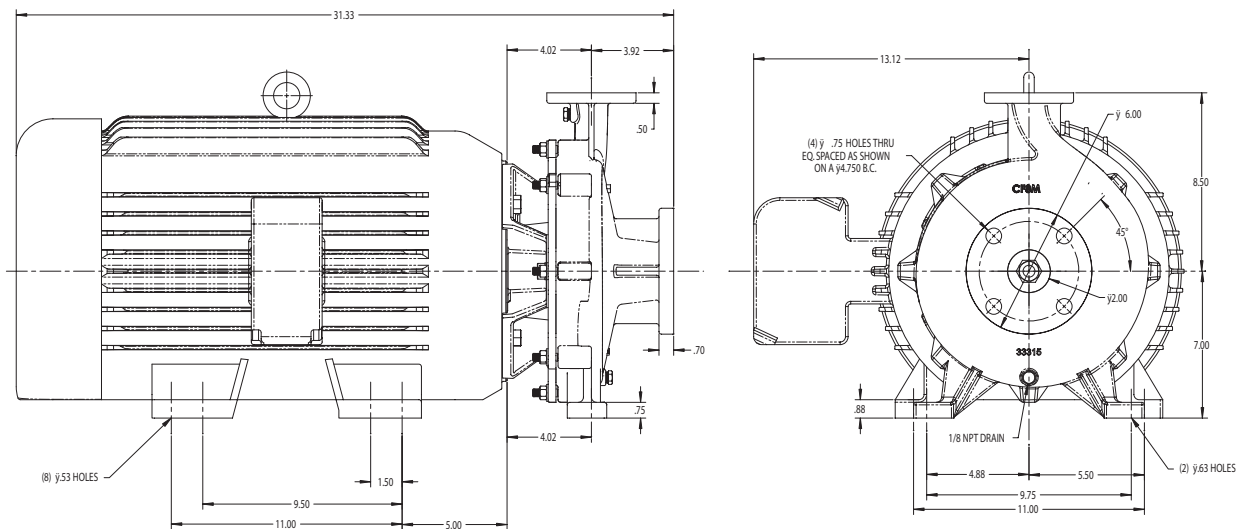

MP PUMPS, INC.

TECUMSEH PRODUCTS COMPANY

34800 BENNETT DRIVE • FRASER, MI 48026-1686

(586) 293-8240 • FAX (586) 293-8469

(800) 563-8006

www.mppumps.com

Form 8118

10-04

