



FLOMAX

Self-Priming
Centrifugal
Pumps
Gasoline Engine
Drive

The unique FLOMAX PUMPAK design permits close coupling to a wide range of gas and diesel engines. FLOMAX pumps include a stainless steel shaft sleeve to protect the engine crankshaft from damage. The open adaptor allows for the proper ventilation and operating temperature of the engine bearing while providing separation between the engine and the liquid in the pump.

1-1/2" - 100 GPM
2" - 140 GPM
2" - 210 GPM
3" - 300 GPM

Powered By:

Gas or
Diesel Engine

3.5HP
5HP
9HP
12HP Electric Start

SPECIFICATIONS

Suction and Discharge	1-1/2", 2", OR 3" NPT
Housing	Cast iron, bronze, aluminum
Impeller	Cast iron, bronze, aluminum, stainless steel
Shaft Sleeve	Stainless steel
Seals	Carbon/ceramic/Viton and Stainless Steel standard. Options available
Fasteners	Stainless steel

Available in:

Cast Iron
Bronze
Stainless Steel
and Aluminum






WARNING

DO NOT USE IN EXPLOSIVE ATMOSPHERES or FOR PUMPING VOLATILE LIQUIDS

FLOMAX

1-1/2" - 2" - 3"

		DIMENSION														
FLOMAX	HP	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
5	3.5	1.5	1.5	8.12	9.56	3.78	9.25	10.23	13.73	14.94	14.00	3.00	19.78	5.88	1.06	15.00
	5	1.5	1.5	8.81	9.66	3.78	9.25	10.23	13.73	14.94	14.00	3.00	21.59	5.88	1.06	17.03
8	3.5	2.0	2.0	8.12	9.56	3.78	9.25	10.23	13.92	14.94	14.00	3.06	19.97	6.06	1.06	15.00
	5	2.0	2.0	8.81	9.66	3.78	9.25	10.23	13.92	14.94	14.00	3.06	21.78	6.06	1.06	17.03
10	8	2.0	2.0	9.16	10.25	4.56	9.88	12.44	18.25	22.00	17.00	4.12	25.47	6.88	1.75	21.81
	14	2.0	2.0	8.62	9.38	4.56	9.88	12.44	18.25	22.00	17.00	4.12	25.12	6.88	1.75	20.25
15	8	3.0	3.0	9.16	10.25	4.56	9.88	12.44	19.25	22.00	17.00	5.00	25.97	7.75	1.75	21.81
	14	3.0	3.0	8.62	9.38	4.56	9.88	12.44	19.25	22.00	17.00	5.00	25.62	7.75	1.75	20.25

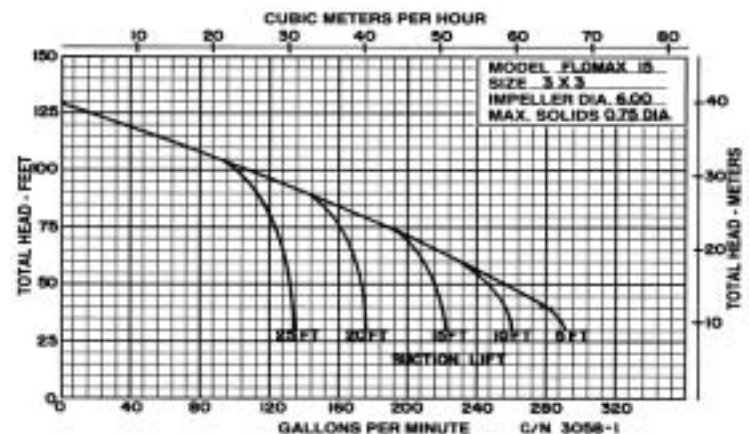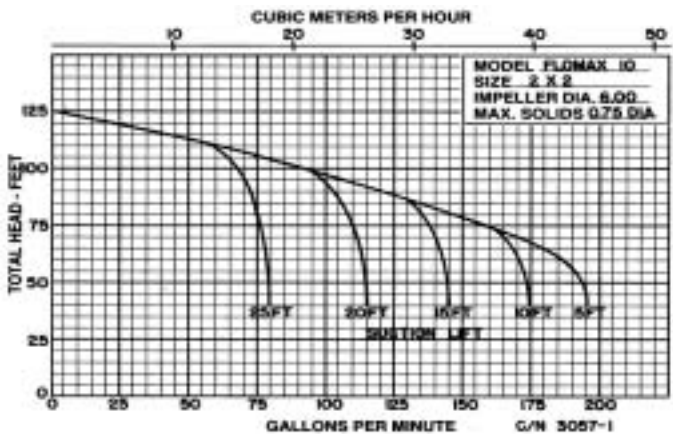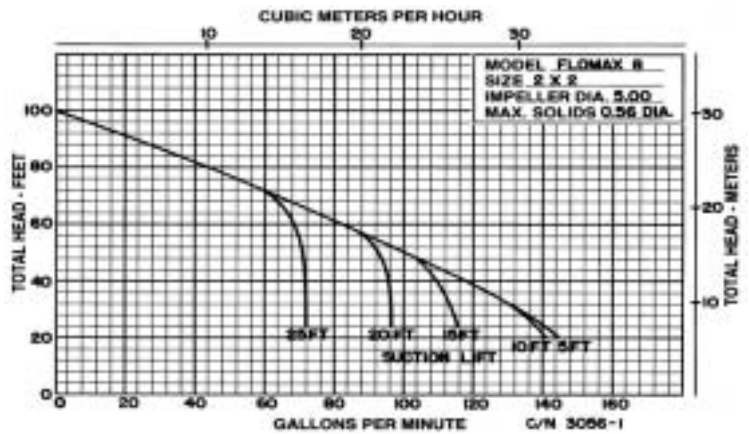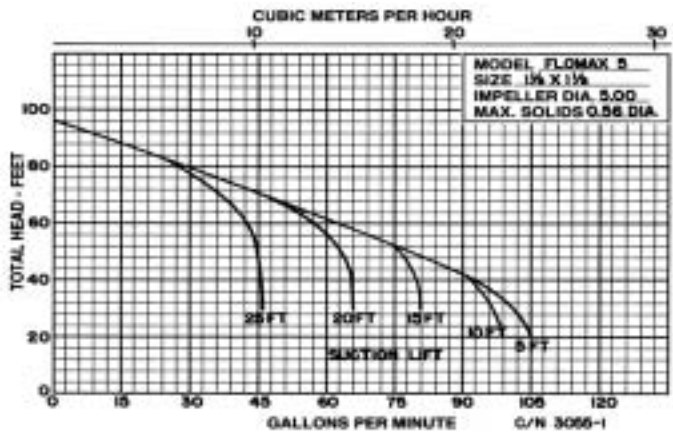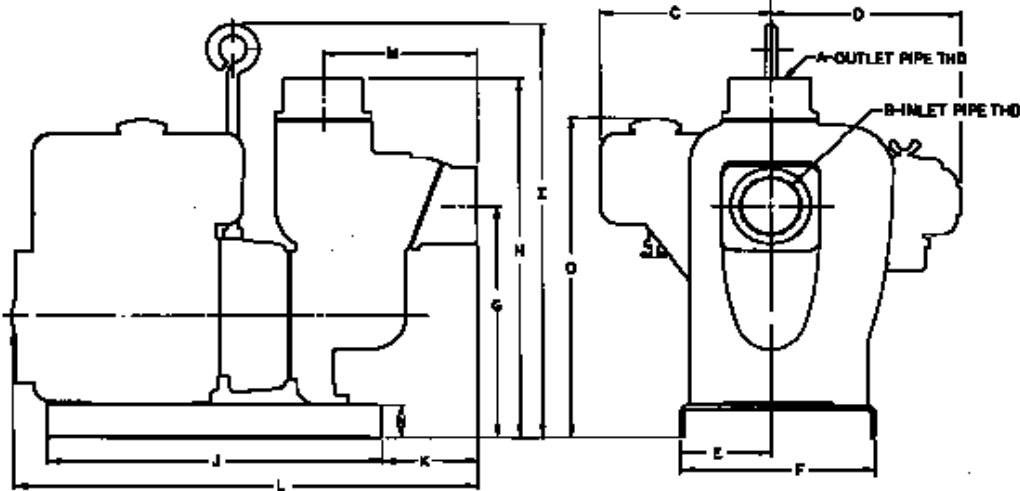

MP PUMPS, INC.
TECUMSEH PRODUCTS COMPANY
34900 BENNETT DRIVE • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006
www.mppumps.com

The FLOMAX 5 and 8 curves are typical curves using 3HP engines. The FLOMAX 10 and 15 curves are typical curves using 8HP engines. For liquids heavier than water, use higher HP engines. The curve data shown is typical performance data using maximum impeller diameters. Actual performance obtained in the field will vary depending upon engine type, impeller spacing and diameter, and the size, length, and type of discharge hoses/pipes used. Best performance is obtained when the largest diameter and shortest hoses/pipes possible are used.