



RANGE OF PERFORMANCE

Flow rate up to 3600 l/h

LIMITS OF USE

Manometric suction lift up to 45 m

Liquid temperature up to + 40°C

Environment temperature up to + 40°C

CONSTRUCTION AND SAFETY STANDARDS

EN 60 335-1

EN 60034-1

IEC 335-1

IEC 34-1

CEI 61-150

CEI 2-3



INSTALLATION AND USE

JDW SELF-PRIMING PUMPS ARE DESIGNED FOR LIFTING WATER FROM DEPTHS GREATER THAN 9M, INCLUDING CASES WITH ENTRAINED AIR. THEY ARE RECOMMENDED FOR DOMESTIC USE INCLUDING WATER DISTRIBUTION (AS PART OF A PRESSURE SET), GARDEN IRRIGATION, ETC.

The pumps must be installed in enclosed places, or at least protected against inclement weather.

GUARANTEE 2 YEARS subject to our general terms of sale.

CONSTRUCTION CHARACTERISTICS

- **PUMP BODY:** cast iron, with threaded ports ISO 228/1.
- **EJECTOR BODY:** cast iron
- **NOZZLE, VENTURI AND DIFFUSER:** technopolymer.
- **IMPELLER:** brass.
- **MOTOR SHAFT:** stainless steel EN 10088-3 - 1.4104.
- **MECHANICAL SEAL:** ceramic - graphite - NBR.
- **ELECTRIC MOTOR:** the pumps are close-coupled to a carefully matched PEDROLLO electric motor, quiet running, totally enclosed fan cooled (TEFC), suitable for continuous duty..
JDWm: single-phase 230 V - 50 Hz with capacitor and thermal overload protector.
JDW: three-phase 230/400 V - 50 Hz.
- **INSULATION:** class F. ● **PROTECTION:** IP 44.

OPTIONS ON REQUEST

⇒ impeller in **technopolymer** (JDWm...X - JDW...X)

⇒ other voltages or frequency 60 Hz

DESCRIPTION

JDW m 1C / 30 - 4"

Series _____

Single-phase motor _____

Motor size _____

Type of nozzle and venturi _____

Min. well diameter in inches _____

3"

JDW self-priming pumps for 3" wells (with immersed ejector)




PERFORMANCE DATA AT n= 2900 1/min

TYPE		POWER		HS metres	FLOW RATE LITRES/HOUR								
Single-phase	Three-phase	kW	HP		0	120	240	360	480	600	720	840	960
TOTAL MANOMETRIC HEAD IN METRES													
JDWm 1C -3"	JDW 1C -3"	0.50	0.70	15	32	28	24	22	19	18	15		
JDWm 1B -3"	JDW 1B -3"	0.60	0.85		36	32	29	26	24	22	19	17	
JDWm 1A -3"	JDW 1A -3"	0.75	1		39	35	32	29	27	25	22	20	17
JDWm 2 -3"	JDW 2 -3"	1.1	1.5		61	56	51	46	42	38	35	33	30
JDWm 1C -3"	JDW 1C -3"	0.50	0.70	20	26	23	19	17					
JDWm 1B -3"	JDW 1B -3"	0.60	0.85		30	27	24	21	18				
JDWm 1A -3"	JDW 1A -3"	0.75	1		33	30	27	23	21	17			
JDWm 2 -3"	JDW 2 -3"	1.1	1.5		55	50	46	41	37	33	30		
JDWm 1C -3"	JDW 1C -3"	0.50	0.70	25	19	15							
JDWm 1B -3"	JDW 1B -3"	0.60	0.85		23	19							
JDWm 1A -3"	JDW 1A -3"	0.75	1		27	24	22						
JDWm 2 -3"	JDW 2 -3"	1.1	1.5		47	43	39	36	33				
JDWm 2 -3"	JDW 2 -3"	1.1	1.5	30	39	34	30						

HS = Suction height

Tolerance of the performance curves according to EN ISO 9906 App. A.

DIMENSIONS AND WEIGHTS

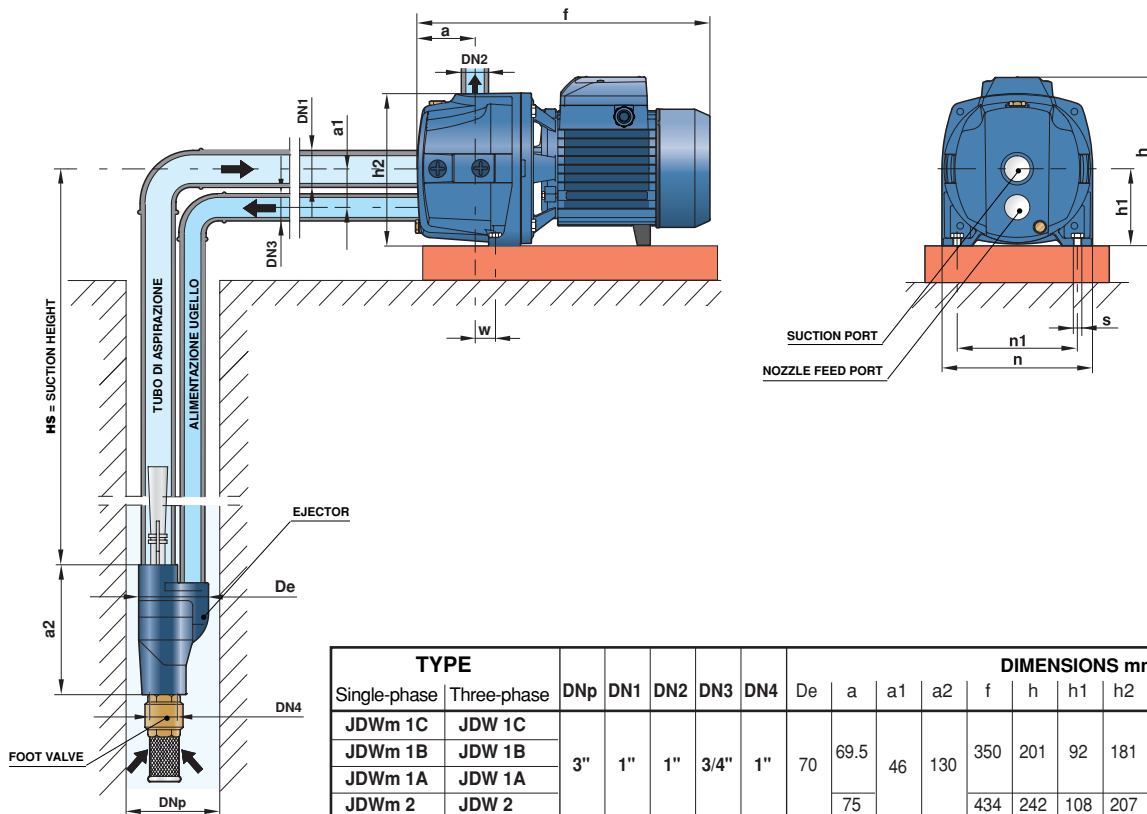

TYPE		DIMENSIONS mm																kg*		
Single-phase	Three-phase	DNp	DN1	DN2	DN3	DN4	De	a	a1	a2	f	h	h1	h2	n	n1	w	s	1~	3~
JDWm 1C	JDW 1C	3"	1"	1"	3/4"	1"	70	69.5	46	130	350	201	92	181	180	144	24	10	14.3	14.3
JDWm 1B	JDW 1B																		14.6	14.6
JDWm 1A	JDW 1A																		15.7	14.7
JDWm 2	JDW 2																		23.9	22.0

(*weight includes ejector)

2"

JDW self-priming pumps for 2" wells (with immersed ejector)




PERFORMANCE DATA AT n = 2900 1/min

TYPE		POWER		HS metres	FLOW RATE LITRES/HOUR										
Single-phase	Three-phase	kW	HP		0	120	240	360	480	600	720	840	960	1080	1200
TOTAL MANOMETRIC HEAD IN METRES															
JDWm 1C -2"	JDW 1C -2"	0.50	0.70	15	46	42	37	34	30	28	25	22	19	17	
JDWm 1B -2"	JDW 1B -2"	0.60	0.85		50	46	42	39	35	32	30	27	24	21	19
JDWm 1A -2"	JDW 1A -2"	0.75	1		54	50	46	43	39	36	34	31	28	25	23
JDWm 2 -2"	JDW 2 -2"	1.1	1.5		85	78	74	70	66	61	57	53	48	44	40
JDWm 1C -2"	JDW 1C -2"	0.50	0.70	20	34	29	24	21	18	16	13	11			
JDWm 1B -2"	JDW 1B -2"	0.60	0.85		38	33	29	26	23	21	18	16	14		
JDWm 1A -2"	JDW 1A -2"	0.75	1		40	35	31	28	25	23	20	18	16		
JDWm 2 -2"	JDW 2 -2"	1.1	1.5		71	63	58	54	50	46	43	39	36	34	
JDWm 1C -2"	JDW 1C -2"	0.50	0.70	25	28	24	20	18	15	13					
JDWm 1B -2"	JDW 1B -2"	0.60	0.85		32	28	25	23	20	17	14				
JDWm 1A -2"	JDW 1A -2"	0.75	1		35	31	28	26	23	20	17				
JDWm 2 -2"	JDW 2 -2"	1.1	1.5		64	59	55	51	47	43	39	36			
JDWm 1C -2"	JDW 1C -2"	0.50	0.70	30	23	18	13								
JDWm 1B -2"	JDW 1B -2"	0.60	0.85		27	22	18	15							
JDWm 1A -2"	JDW 1A -2"	0.75	1		28	24	21	17							
JDWm 2 -2"	JDW 2 -2"	1.1	1.5		56	50	46	42	38	34	31				
JDWm 1B -2"	JDW 1B -2"	0.60	0.85	35	21	15									
JDWm 1A -2"	JDW 1A -2"	0.75	1		23	18	15								
JDWm 2 -2"	JDW 2 -2"	1.1	1.5		51	45	41	37	33						
JDWm 2 -2"	JDW 2 -2"	1.1	1.5		41	36	33								
JDWm 2 -2"	JDW 2 -2"	1.1	1.5	45	36	30									

HS = Suction height

Tolerance of the performance curves according to EN ISO 9906 App. A.

DIMENSIONS AND WEIGHTS

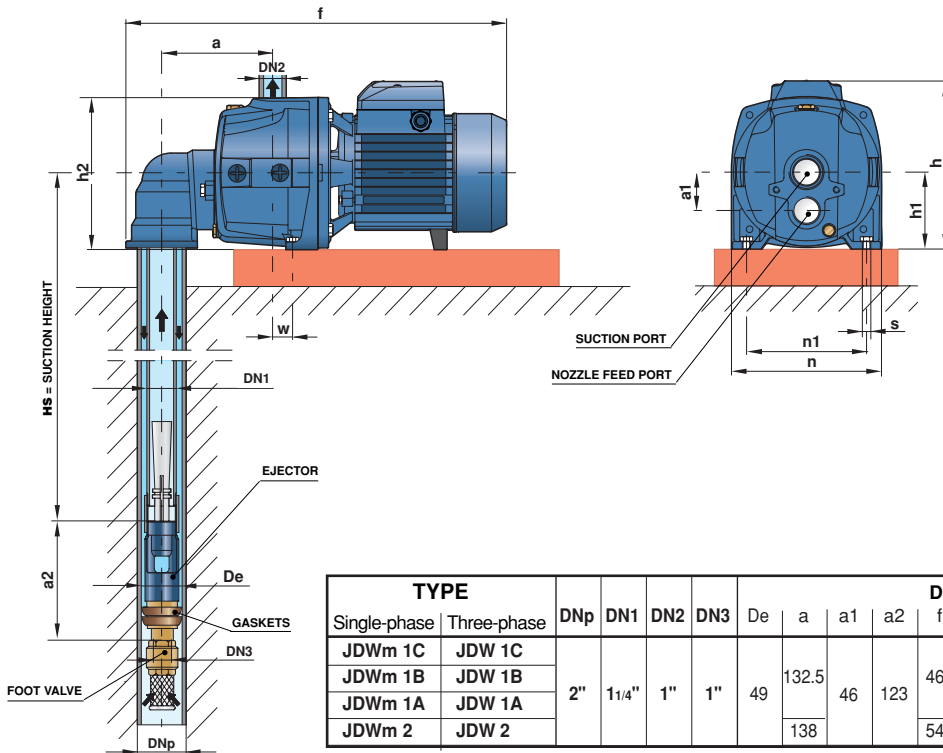

TYPE		DNp	DN1	DN2	DN3	De	DIMENSIONS mm										kg*		
Single-phase	Three-phase						a	a1	a2	f	h	h1	h2	n	n1	w	s	1~	3~
JDWm 1C	JDW 1C	2"	1 1/4"	1"	1"	49	132.5	46	123	460	201	92	181	180	144	24	10	15.9	15.9
JDWm 1B	JDW 1B									16.2	16.2								
JDWm 1A	JDW 1A						17.3	16.3											
JDWm 2	JDW 2						138	540	242	108	207	206	164	22	25.5	23.2			

(*weight includes ejector and adaptor)