



316 Stainless Steel Aqua-Tiger Series AC/DC Centrifugal Pumps

Features


- All wetted components 316 SS construction.
- Standard Viton mechanical seal for longevity. Low purchase cost and easy to maintain.
- Compact in size for portability.
- Discharge ports can be rotated 90 degree increment for ease of mounting.
- Continuous duty rated AC version for longevity.

Specifications


Cover Body and Impeller: 316 Stainless Steel
Mechanical Seal: 316 Stainless Steel Viton Elastomer
Port Size: 3/4" NPT, Internal
Weight: 5 lbs.
Motor: 316 Stainless Steel shaft, permanent magnet (DC), fully enclosed and low amp draw

Models:
CMSV012D - 12 Volt DC
CMSV024D - 24 Volt DC
CMSV036D - 36 Volt DC
CMSV0115A - 115 Volt AC

Dimensions

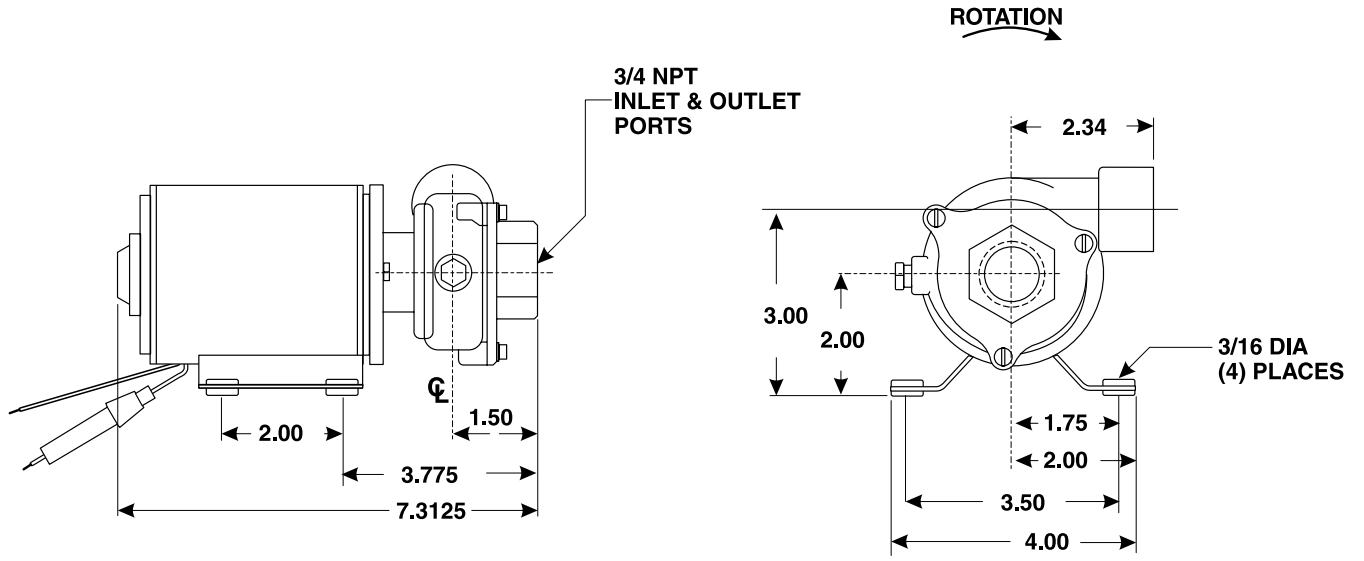

Performance

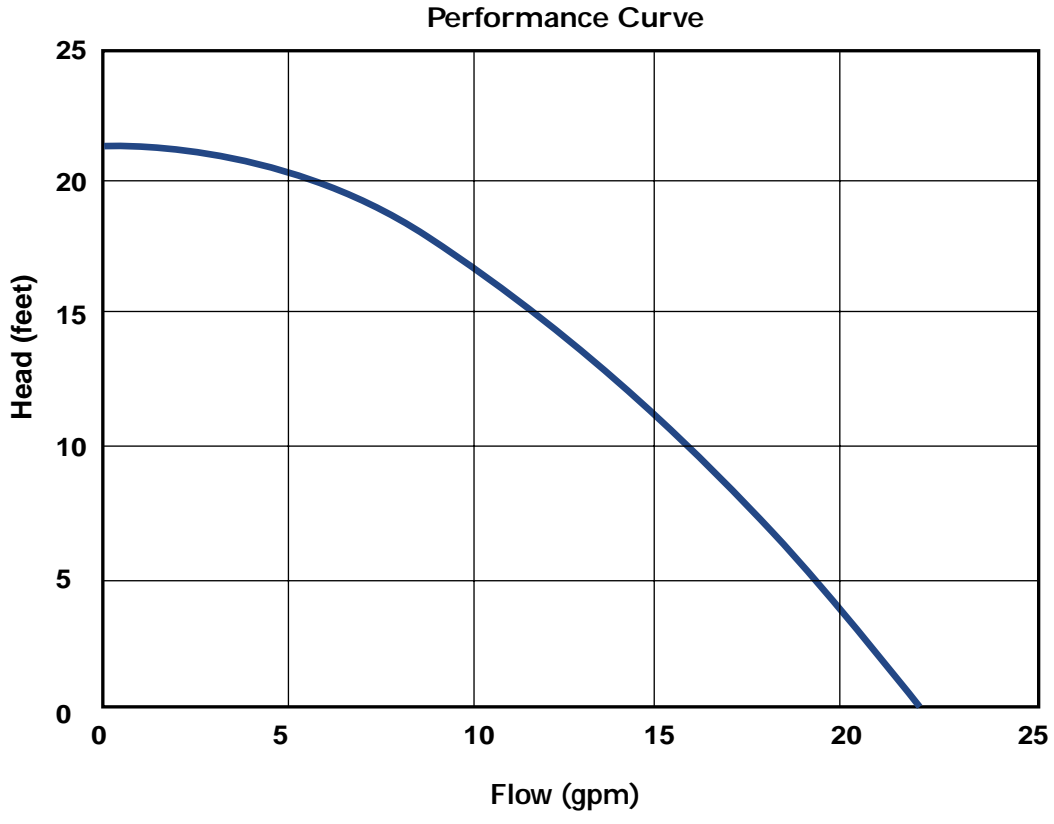

375 Fifth Avenue NW • New Brighton, MN 55112 • Phone 800 471-0460 • Fax 800 672-7023
www.hypropumps.com