MYERS® MUSP-125




FEATURES

- Ideal for basement wet bars, laundry and utility sinks
- Designed to be used with a sink where gravity drain line is not available
- Fully automatic operation
- Complete, compact system
- Easy to install eliminates the need for traps, vents and costly labor
- Quiet, trouble-free operation easily mounts beneath your sink
- Includes pump assembly, oneway valve, discharge shut-off/flow balancing valve, strainer cup
- CSA Listed

SPECIFICATIONS

| Capacities | 40 GPM | 151.4 LPM |
|---------------------------|----------------------|------------|
| Shut-off Head | 14' | 4.27 m |
| Liquids Handling | drain water | |
| Intermittent Liquid Temp. | up to 120°F | up to 50°C |
| Weight | 15 lbs. | |
| Motor | 1/3 HP | |
| Electrical | 115V, 4A, 1Ø, 60Hz | |
| Housing | thermoplastic | |
| Power Cord | 8' three-prong, SJTW | |

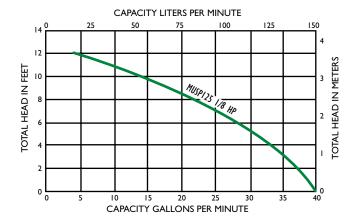



USA

293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA 490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO N1T 0A5 PH: 800-363-7867 ORDERS FAX: 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.