MODELS: 17460-0003


17460-0013

115 Volt A.C.

Product Data

17460-0003 - New # = 18690-0000

17460-0013 - New # = 18690-0010 (RV Model)



DESIGN FEATURES

Pump: Self-Priming Flexible Impeller

with Stainless Steel Wearplates

Impeller: Jabsco Nitrile Compound

Macerator: Stainless Steel Cutter Plate

reduces particle size to 1/8"

maximum

Seal: Lip Type

Ports: Model 17460-0003

Inlet — 1½" External Pipe Thread Outlet — ¾" Garden Hose Thread

Model 17460-0013 Inlet — 3" Slip-on Hose

Outlet - 3/4" Garden Hose Thread


Motor: 115 Volt A.C., Single Phase,

60 Cycle, Thermal Overload

Protection

Weight: 17 lbs. approx.

17460-0003



APPLICATION INFORMATION

The 17460 series A.C. JABSCO macerator pump unit is the ideal answer to waste handling problems for marine, recreational vehicle and domestic uses. The macerator section grinds waste down to a particle size of ½" maximum so it can be pumped easily through a garden hose discharge line. The pump section is self-priming, permitting the unit to be mounted above or below the tank in a convenient location.

Empties most recirculating toilets in just one minute: empties a 30 gallon holding tank in only 3 minutes!

The 17460 series waste pump will macerate and pump all waste and tissue normally found in marine and recreational vehicle waste systems. It will NOT handle hard solid objects, sanitary napkins or rags.

17460-0013

INSTALLATION INSTRUCTIONS

Locating the Pump: The JABSCO A.C. macerator pump unit is self-priming to an eight foot lift and may be located at any convenient point in the waste discharge system.

Plumbing Connections: For model 17460-0003 use minimum $1\frac{1}{2}$ " I.D. non-collapsible suction hose. Two inch I.D. hose may be slipped over the inlet and clamped on the smooth area of the port. For model 17460-0013 use 3 inch I.D. non-collapsible hose and clamp on outside diameter of macerator housing.

All suction connections must be airtight and free of sharp bends or restrictions. Use minimum ¾" I.D. garden or contractors hose for discharge.

Be sure adequate voltage and current capacity is available in electrical installation.


OPERATING INSTRUCTIONS

Operation: The JABSCO macerator pump unit has been designed to handle waste, toilet tissue, and Kleenex. It will also handle solids such as filter tip cigarettes, cigars and chunks of soft fruits or vegetables less than 1" in size. It will NOT pump solid objects like peach pits, rags, or sanitary napkins. The holding tank and pump should be flushed with several gallons of water after each pumpout. Do NOT run pump dry.

HEAD CAPACITY TABLE

| Head Feet | G.P.M. |
|-----------|--------|
| 5 | 13.0 |
| 10 | 12.0 |
| 20 | 10.5 |
| 30 | 8.5 |
| 40 | 6.0 |

Flow rates are for water, capacity may be slightly reduced when handling heavy solids. Full load Amps — 7.2.

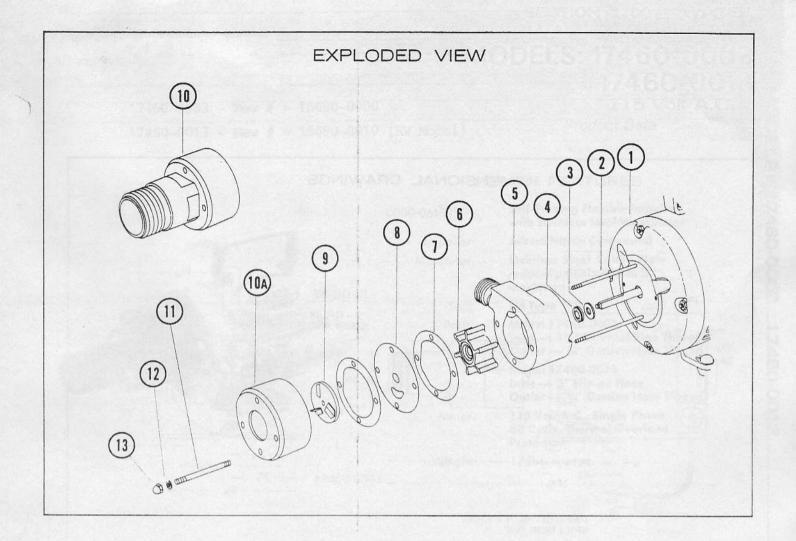

PARTS LIST

| Key | Description | Part Number | Qty. Req. |
|-----|-------------------|-------------|--------------|
| 1 | Motor | 93004-1840 | 1 |
| 2 | Stud | 17288-0000 | 2 |
| 3 | Slinger | 06342-0000 | 1 |
| 4 | Seal | 92700-0910 | 1 |
| 5 | Body | 17267-0000 | 1 |
| 6 | Impeller | 07273-0003 | 1 |
| 7 | Gasket | 17269-0000 | 2 |
| 8 | Wearplate | 17268-0000 | 1 |
| 9 | Cutter Plate | 17266-0000 | 1 |
| 10 | Macerator Housing | 17263-0000 | 1 |
| 10a | Macerator Housing | 17263-0010 | 1 |
| 11 | Stud | 17288-0010 | 2 |
| 12 | Fiber Washer | 91613-0140 | 4 |
| 13 | Acorn Nut | 91085-0340 | 4 |

SERVICE INSTRUCTIONS

- Remove acorn nuts #91085-0340 and inlet housing #17263-0000.
- 2. Unscrew cutter plate from shaft by turning counterclockwise facing cutter blades. (Hold motor shaft behind plate to prevent turning.)
- 3. Remove gaskets, wearplate and slide pump assembly off mounting studs.
- 4. Replace seal, impeller gaskets or other parts as necessary. To remove seal, push out evenly with screwdriver from impeller bore side of body. To reassemble seal, coat outside of metal case with Permatex or similar sealant and press into body with lip facing impeller. A light coating of grease should be applied to impeller bore and wearplate to aid initial dry startup.
- 5. Reassemble body, impeller, gaskets, wearplate, cutter plate, suction housing and acorn nuts.

DIMENSIONAL DRAWINGS 17460-0003 41132 115/6 11/2-111/2 NPT 425/32 34 - 1134 NH (GARDEN HOSE) 523/12 DIA DIA DIA 41/8 33% 35 1 141%2 50/4 CORD — ELECTRIC 72 ± 3 LONG WITH 3 PRONG PLUG 17460-0013 42552 $^34 - 11^3{}_2$ NH (GARDEN HOSE) 523 DIA 3 DIA 418 35% 12% - CORD - ELECTRIC 72 ± 3 LONG WITH 3 PRONG PLUG

JABSCO PRODUCTS III

A Unit of International Telephone and Telegraph Corporation, 1485 Dale Way, Costa Mesa, California 92626