

SCOT


MOTORPUMP™ — 3500 RPM
60 HERTZ, 2.5 X 2 X 5.63 NPT
LTC 18B

18B
JP
LTC 18B


MOTOR DIMENSIONS

NEMA JP FRAME 3 PHASE 3500 RPM

HP	Type	Frame	D	E	F	O	AB	BG	L	MH
2/3	ODP	JP145	3.50	2.75	2.50	7.00	5.25	5.38	4.69	0.34
5	ODP	JP182	4.50	3.75	2.75	9.00	5.88	5.88	4.94	0.41
7.5	ODP	JP184	4.50	3.75	2.75	9.00	5.88	6.38	5.44	0.41
2	TEFC	JP145	3.50	2.75	2.50	7.00	5.25	5.38	6.69	0.34
3	TEFC	JP182	4.50	3.75	2.25	8.69	5.87	5.13	12.65	0.41
5	TEFC	JP182	4.50	3.75	2.75	9.00	5.88	5.88	6.94	0.41
7.5	TEFC	JP184	4.50	3.75	2.75	9.00	5.88	6.38	7.44	0.41

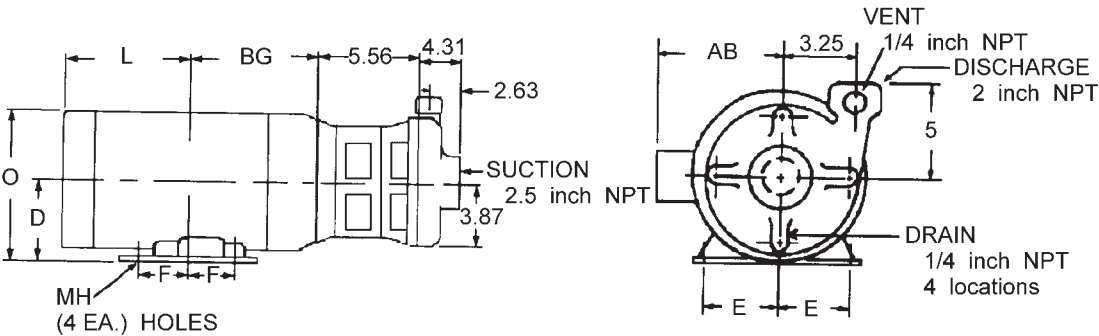


ALL DIMENSIONS IN INCHES.

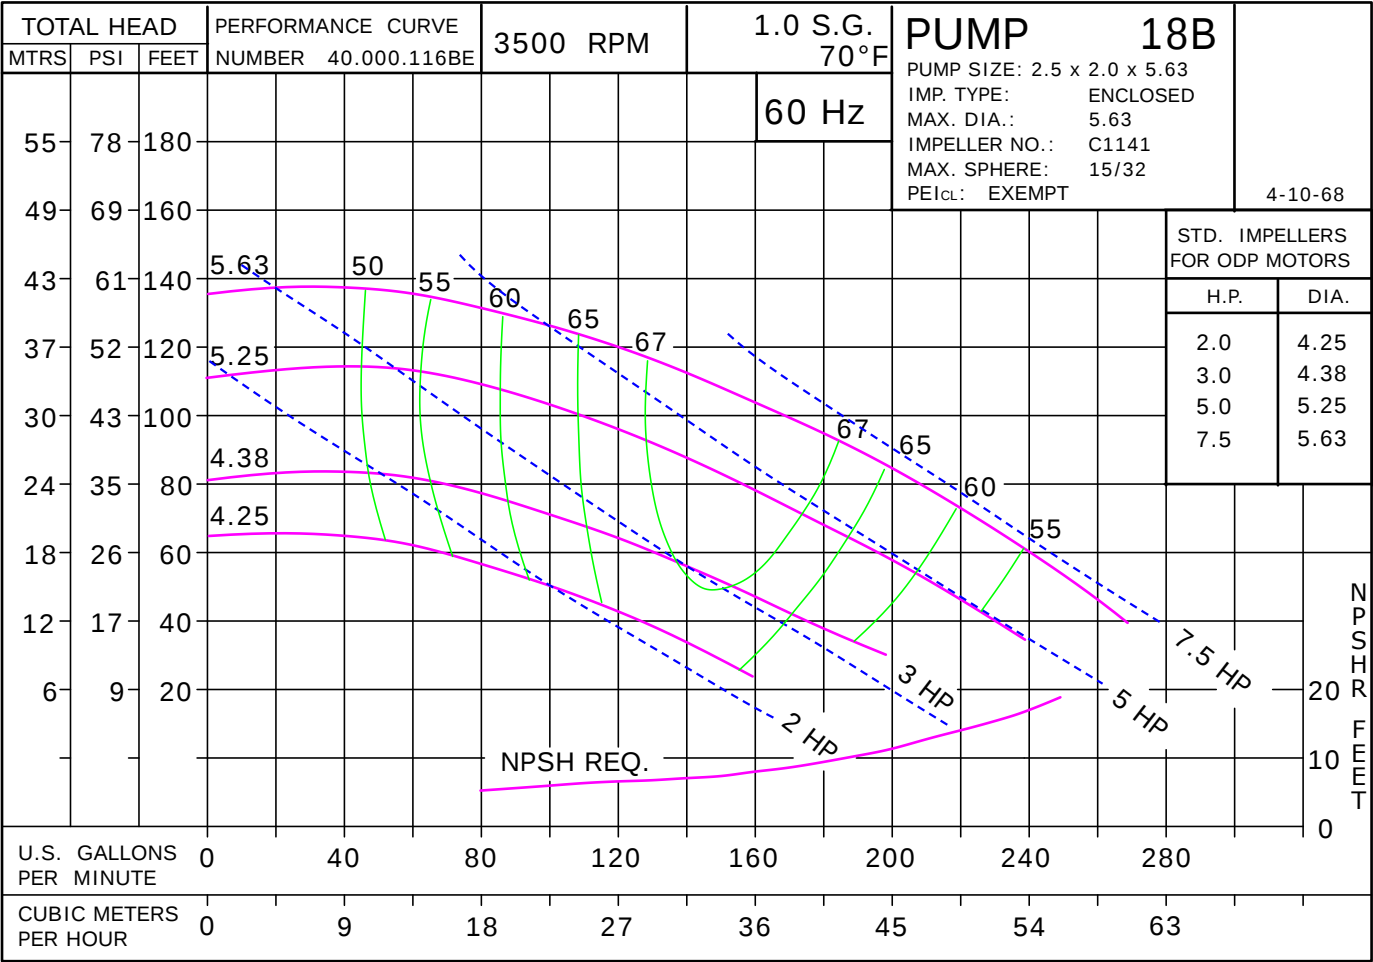

016B5DP D1256 0183500
18B
JP
LTC 18B
018BJPLTC
81.001.595 M19

LTC 18B • Bronze • JP Frame • 3500 RPM

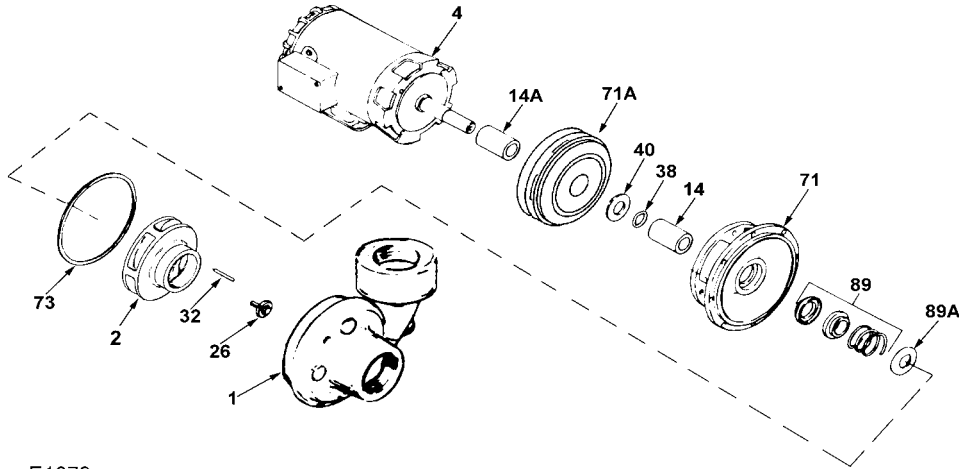

E1079

KEY NO.	PART NAME	PUMP NO. 18B
1	CASE, BRONZE, 2.5 x 2 NPT	130.000.195X
2	IMPELLER, 7/8" KEYED, ENCLOSED, SPECIFY DIAMETER: BRONZE	137.000.130
4	MOTOR, JP140/180	See Chart
14*	SHAFT SLEEVE, BRONZE	110.000.178
14A*	SHAFT SLEEVE, BRONZE	110.000.215
26*	IMPELLER RETAINER, STAINLESS	118.000.111A
32*	KEY, STAINLESS	102.000.102
38*	O-RING, SHAFT, EPDM	116.000.117B
40*	FLINGER, STAINLESS	104.000.165
71	ADAPTER, BRONZE	132.000.219
71A	EXTENSION, IRON	137.000.762
73*	GASKET, CASE, EPDM	116.000.146A
89*	1½" SEAL TYPE 21, EPDM-CARB/SIL	101.000.175B
89A*	SEAL RETAINER, STAINLESS	104.000.175
--	REPAIR KIT	118.000.560
* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.		