

SCOT
ARDOX

MOTORPUMP™ — 3500 RPM
60 HERTZ, 2 X 1.5 X 5.63 NPT
LTC 19GN

19GN
JP
LTC 19GN


MOTOR DIMENSIONS
NEMA JP FRAME 3 PHASE ODP

FRAME	D	E	F	O	AB	BG	L*	MH
JP143	3.50	2.75	2.50	7.00	5.25	5.38	4.69	.34
JP145	3.50	2.75	2.50	7.00	5.25	5.38	4.69	.34
JP182	4.50	3.75	2.25	9.00	5.88	5.88	4.94	.41


*For TEFC Motor: Add 2" to "L" Dimension.

3500 RPM

HP	FRAME
1.5	JP143
2, 3	JP145
5	JP182

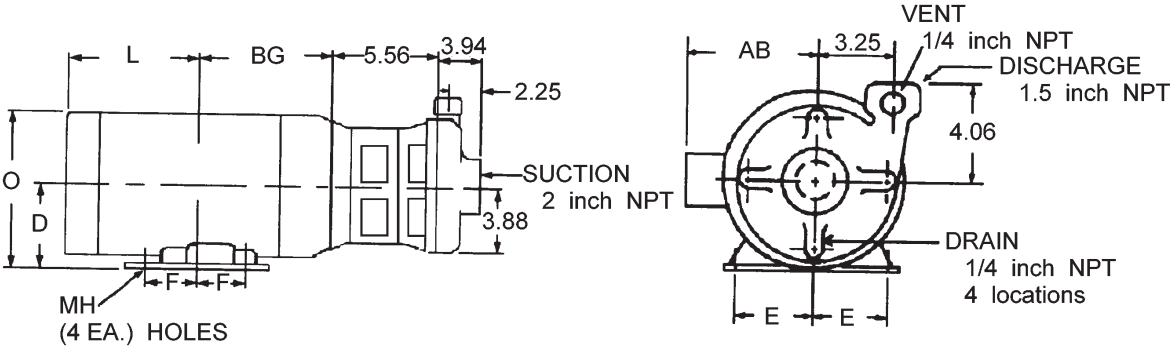

ALL DIMENSIONS IN INCHES

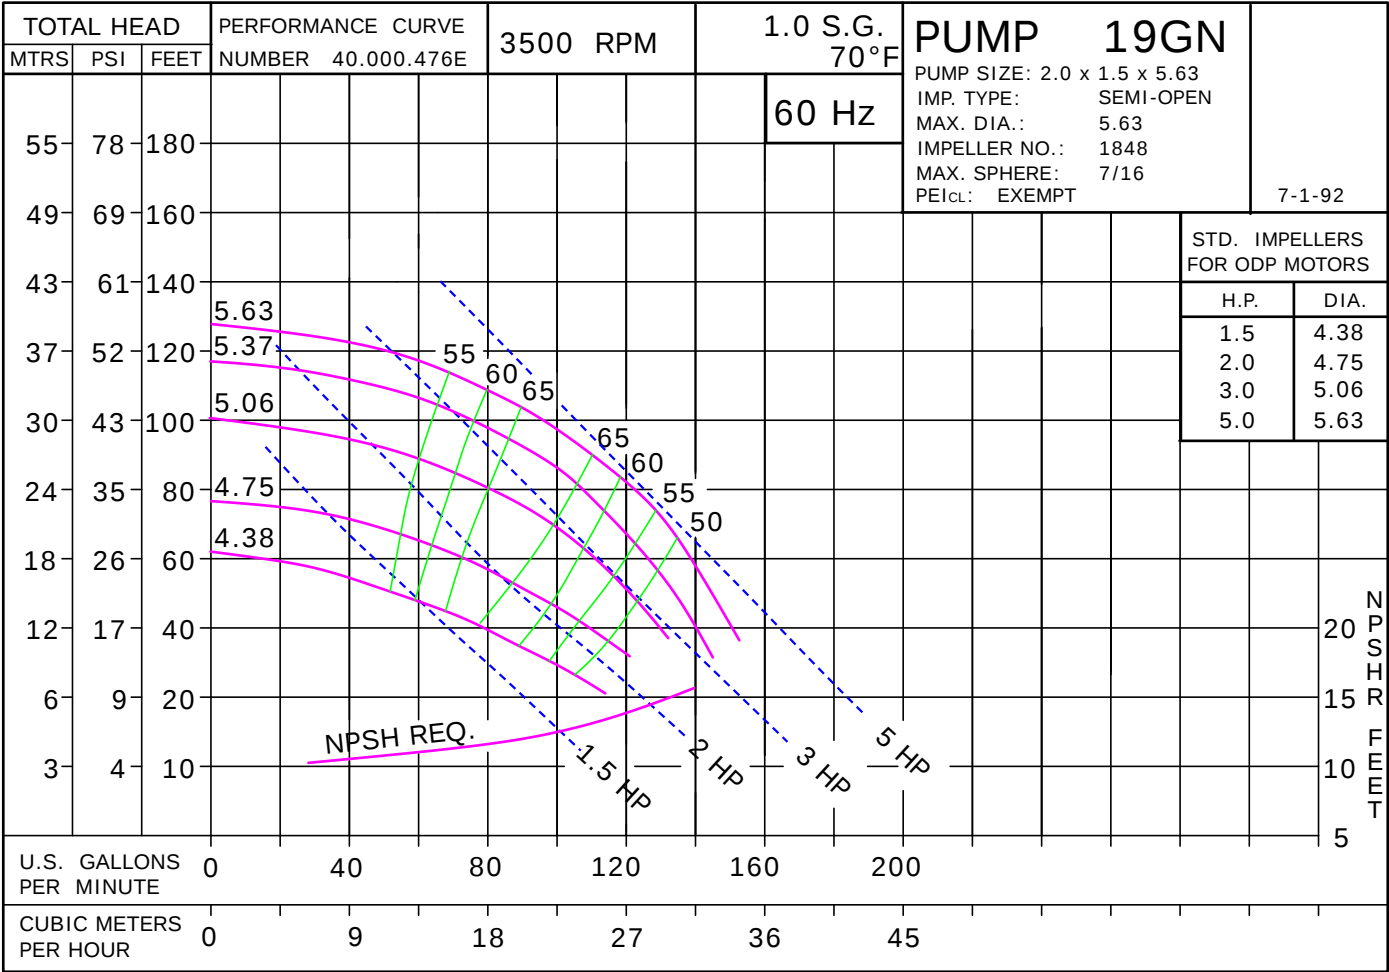


019G75LTC D1261
019N3500

19GN
JP
LTC 19GN

019NPLTC
81.001.528 K9

LTC 19GN • Iron • JP Frame • 3500 RPM

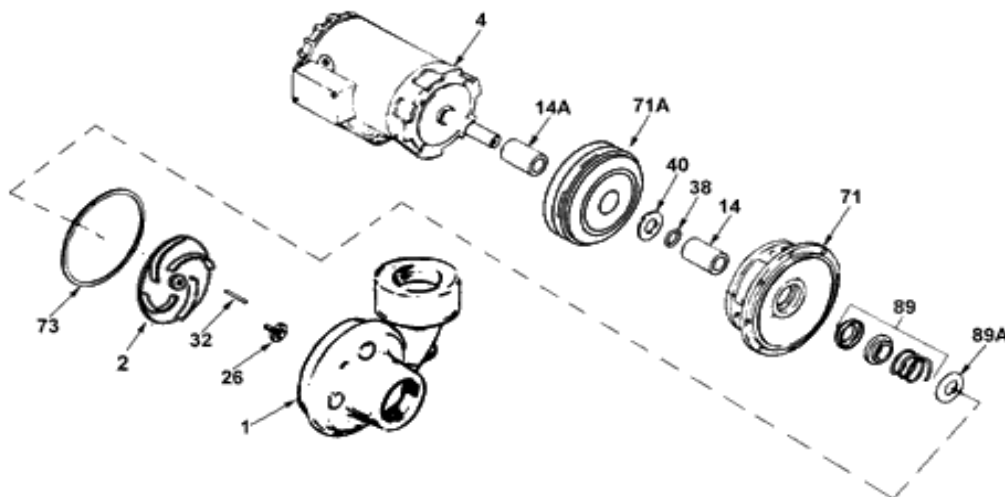

E1189

KEY NO.	PART NAME	PUMP NO. 19GN
1	CASE, IRON, 2 x 1.5 NPT	130.000.344X
2	IMPELLER, 7/8" KEYED, SEMI-OPEN, SPECIFY DIAMETER: IRON BRONZE	131.000.822 137.000.872
4	MOTOR, JP140/180	See Chart
14*	SHAFT SLEEVE, BRONZE	110.000.178
14A*	SHAFT SLEEVE, BRONZE	110.000.215
26*	IMPELLER RETAINER, STAINLESS	118.000.111A
32*	KEY, STAINLESS	102.000.102
38*	O-RING, SHAFT, EPDM	116.000.117B
40*	FLINGER, STAINLESS	104.000.165
71	ADAPTER, IRON	132.000.194X
71A	EXTENSION, IRON	137.000.762
73*	GASKET, CASE, EPDM	116.000.146A
89*	1½" SEAL TYPE 21, EPDM-CARB/SIL	101.000.175B
89A*	SEAL RETAINER	104.000.175
--	REPAIR KIT	118.000.560
* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.		